AD/A-002 233

RESPONSE AMPLITUDE OPERATOR PREDICTIONS FOR THE USS BELKNAP (DLG-26) AND USS JOSEPH HEWES (DE 1052) CLASS DESTROYERS

T. R. Applebee, et al

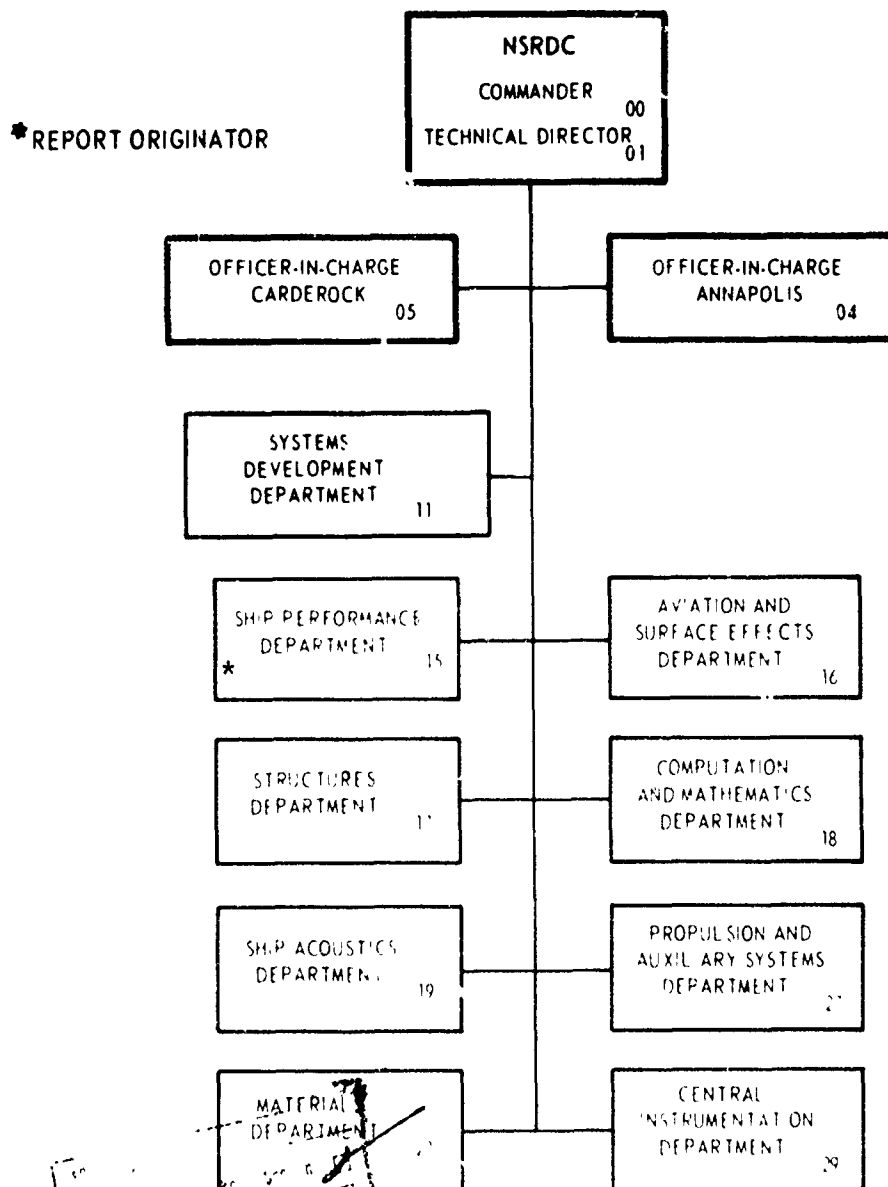Naval Ship Research and Development Center
Bethesda, Maryland

November 1974

MAJOR NSRDC ORGANIZATIONAL COMPONENTS

*REPORT ORIGINATOR

```
                          ┌─────────────────────┐
                          │       NSRDC         │
                          │  COMMANDER       00 │
                          │  TECHNICAL DIRECTOR │
                          │                  01 │
                          └─────────────────────┘
        ┌──────────────────────┐        ┌──────────────────────┐
        │  OFFICER-IN-CHARGE    │        │  OFFICER-IN-CHARGE    │
        │  CARDEROCK       05   │        │  ANNAPOLIS       04   │
        └──────────────────────┘        └──────────────────────┘

        ┌──────────────────────┐
        │     SYSTEMS           │
        │  DEVELOPMENT          │
        │  DEPARTMENT      11   │
        └──────────────────────┘

   ┌──────────────────────┐        ┌──────────────────────┐
   │ SHIP PERFORMANCE     │        │  AVIATION AND        │
   │ DEPARTMENT           │        │  SURFACE EFFECTS     │
   │ *                15  │        │  DEPARTMENT      16  │
   └──────────────────────┘        └──────────────────────┘

   ┌──────────────────────┐        ┌──────────────────────┐
   │ STRUCTURES           │        │  COMPUTATION         │
   │ DEPARTMENT       17  │        │  AND MATHEMATICS     │
   │                      │        │  DEPARTMENT      18  │
   └──────────────────────┘        └──────────────────────┘

   ┌──────────────────────┐        ┌──────────────────────┐
   │ SHIP ACOUSTICS       │        │  PROPULSION AND      │
   │ DEPARTMENT       19  │        │  AUXILIARY SYSTEMS   │
   │                      │        │  DEPARTMENT          │
   └──────────────────────┘        └──────────────────────┘

   ┌──────────────────────┐        ┌──────────────────────┐
   │ MATERIAL             │        │  CENTRAL             │
   │ DEPARTMENT           │        │  INSTRUMENTATION     │
   │                      │        │  DEPARTMENT          │
   └──────────────────────┘        └──────────────────────┘
```

AD/A002 232

REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER SPD-590-01	**2. GOVT ACCESSION NO.** **3. RECIPIENT'S CATALOG NUMBER**
4. TITLE (and Subtitle) RESPONSE AMPLITUDE OPERATOR PREDICTIONS FOR THE USS BELKNAP (DLG-26) AND USS JOSEPH HEWES (DE-1052) CLASS DESTROYERS	**5. TYPE OF REPORT & PERIOD COVERED**
	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) T. R. Applebee and A. E. Baitis	**8. CONTRACT OR GRANT NUMBER(s)**
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Ship Research and Development Center Bethesda, Maryland 20084	**10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS** Work Unit No. 1-1568-012
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Air Engineering Center Philadelphia, Pennsylvania 19122 Code NI-23	**12. REPORT DATE** November 1974
	13. NUMBER OF PAGES 4̶1̶ 48
14. MONITORING AGENCY NAME & ADDRESS(If different from Controlling Office)	**15. SECURITY CLASS. (of this report)** UNCLASSIFIED
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for Public Release: Distribution Unlimited

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Response Amplitude Operators, Ship/Helicopter Interface, LAMPS Helicopter Operation, Ship Motions at Arbitrary Position of Ship, Destroyers

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

The purpose of this investigation is to predict the response amplitude operators (squared transfer functions) for the DLG-26 and DE-1052 Class Destroyers. The response amplitude operators, RAOs, are computed for the ships in LAMPS (Light Airborne Multipurpose System) configuration and are to be used for ship motion predictions in ship/helicopter interface design. Motion response amplitude operators are presented for speeds 10 and 20 knots, at ship headings relative to the sea of 0, 30, 60, 90, 120, 150, and 180 degrees (180 degrees denoting head seas).

DD FORM 1473 EDITION OF 1 NOV 65 IS OBSOLETE
1 JAN 73
S/N 0102-014-6601 |

RESPONSE AMPLITUDE OPERATOR PREDICTIONS
FOR THE USS BELKNAP (DLG-26) AND USS JOSEPH HEWES (DE-1052)
CLASS DESTROYERS

by

T. R. Applebee

and

A. E. Baitis

SHIP PERFORMANCE DEPARTMENT

\9

TABLE OF CONTENTS

LIST OF FIGURES

LIST OF TABLES

iii

NOTATION

L	Ship length
L_A	Lateral displacement
L_0	Longitudinal displacement
L_V	Vertical displacement
px, pθ, pψ	Phase differences, (angles) for surge, pitch, and yaw
R(t)	Ship response to a sinusoidal excitation
R_A	Response amplitude
S_R	Ship motion spectral density
S_ζ	Pierson-Moskowitz spectral density ordinates
t	Time variable
x*,y*,z*	Coordinates of any point measured from the origin of the coordinate system
X	Surge
ϵ	Phase angle
λ	Wavelength
θ	Pitch
ψ	Yaw
ω	Wave frequency
ω_E	Wave frequence encounter

ABSTRACT

The purpose of this investigation is to predict the response amplitude operators (squared transfer functions) for the DLG-26 and DE-1052 Class Destroyers. The response amplitude operators, RAOs, are computed for the ships in LAMPS (Light Airborne Multipurpose System) configuration and are to be used for ship motion predictions in ship/helicopter interface design. Motion response amplitude operators are presented for speeds 10 and 20 knots, at ship headings relative to the sea of 0, 30, 60, 90, 120, 150, and 180 degrees (180 degrees denoting head seas).

ADMINISTRATIVE INFORMATION

INTRODUCTION

Using a computer-implemented procedure, the ship motion response amplitude operators were predicted for the DLG-26 and DE-1052 Class Destroyers in LAMPS (Light Airborne Multipurpose System) configuration; that is, the ship conditions represent the cases for helicopter operations. Although the RAOs were computed at a single, specific point on each ship, simple transformations make it possible to obtain ship motions at any arbitrary position on the ship (for example, on the helicopter platform). The RAOs computed for

1. Ship headings of 0, 30, 60, 90, 120, 150, and 180 degrees

2. Ship speeds of 10 and 20 knots,

are presented in both tables and figures.

1.

SHIP PARTICULARS

The ship particulars, supplied by NAVSEC Code 6136 and 6134B, and computer-fitted body plans for the DLG-26 and the DE-1078 (a member of the DE-1052 Class) are given in Tables 1 and 2, respectively. It should be noted that the ship particulars represent the ships in LAMPS (Light Airborne Multipurpose System) configuration conditions.

APPROACH

The RAOs were determined using the NSRDC Ship Motion and Sea Load Computer Program.[1] This program utilizes the calculation procedure described by Bales, Meyers, and Rossignol.[2] That is, the ship response, R, to a sinusoidal excitation of unit amplitude for a given wave encounter frequency, ω_E is taken as

$$R(t) = R_A \cos(\omega_E t - \epsilon) \tag{1}$$

where t is the time variable, ϵ is the phase angle (lag with respect to the maximum wave elevation at the origin), and R_A is the response amplitude (frequency response function). Further, it should be noted that the ship motion spectral density, S_R, is

$$S_R(\omega) = [R_A(\omega)]^2 \cdot S_\zeta(\omega) \tag{2}$$

where $S_\zeta(\omega)$ is the irregular wave spectral density and $[R_A(\omega)]^2$ is the RAO. Equation 2 may be used to determine the ship motions in a seaway[2]; however, it should be noted that the realism of the predicted ship responses will be strongly affected by the model of the wave spectrum selected. It has

---

[1] Meyers, W.G., D.J. Sheridan and N. Salvesen, "Manual NSRDC Ship Motion and Sea Load Computer Program," NSRDC Report 3376 (in preparation).

[2] Bales, S.L., W.G. Meyers and G.A. Rossignol, "Helicopter Landing Platform Response Predictions of DLG-26 and DE-1040 Class Destroyers," NSRDC Report 3868, July 1973.

2

been established frequently by different authors that the single parameter Pierson-Moskowitz wave spectrum is an inadequate wave spectra model for many ship motion problems.[3, 4,5,6,7]

RESULTS

Tables 3 through 30 in the Appendix present the ship response amplitude operators with respect to ω_E, wave encounter frequency, λ/L, wavelength/ship length, and L/λ. The dimension of ω_E, identified as WE in tables, is radians/second. The RAOs for surge, sway, and heave are in $feet^2/feet^2$, and for roll, pitch, and yaw in $degrees^2/feet^2$. The phase angles are in degrees. Ship heading angle to the waves is defined as 180 degrees for head waves, and 150 degrees for waves approaching the ship from 30 degrees off the port bow.

The RAOs were computed at the intersection of the longitudinal center-line at the waterplane section with the transverse plane through the center of gravity. Responses at other points along the ship can be found by using the data in the tables and equations (15) of Reference 2, i.e.,

$$L_0 = x - y^* \psi + z^* \theta, \text{ (longitudinal)}$$

$$L_A = y - z^* \phi + x^* \psi, \text{ (lateral)}$$

$$L_V = z - x^* \theta + y^* \phi, \text{ (vertical)} \qquad (3)$$

[3] Hadler, J.B. and T.H. Sarchin, "Seakeeping Criteria and Specifications," SNAME Seakeeping Symposium, Webb Institute of Naval Architecture, October 1973.

[4] Baitis, A.E., S.L. Bales and W.G. Meyers, "Design Acceleration and Ship Motions for LNG Cargo Tanks," Tenth Symposium on Naval Hydrodynamics, June 1974.

[5] Cummins, W.E., "Prediction of Seakeeping Performance," 17th American Towing Tank Conference State of the Art Report - Seakeeping, June 1974.

[6] Hoffman, D., "Analysis of Measured and Calculated Spectra," International Symposium on the Dynamics of Marine Vehicles and Structures in Waves, University College, London, April 1974.

[7] Hoffman, D., "Environmental Condition Representation," 17th American Towing Tank Conference State of the Art Report - Seakeeping, June 1974.

Equation 3 represents the linear ship responses at a point (x^*, y^*, z^*) in a right-handed orthogonal coordinate system.

For example, the longitudinal displacement, velocity, and acceleration at a point (x^*, y^*, z^*) on a helicopter platform is found by applying the above L_0 equation for each ω_{Ei} as follows:

1. Determine the dimensional transfer functions for surge, pitch, and yaw:

$$x_i = \sqrt{\text{Surge RAO}_i}$$

$$\theta_i = \sqrt{\text{Pitch RAO}_i/(180/\pi)}$$

$$\psi_i = \sqrt{\text{Yaw RAO}_i/(180/\pi)} \tag{4}$$

2. Determine the phase differences for surge, pitch, and yaw (merely converting to radians):

$$px_i = (\text{Phase of surge})_i/(180/\pi)$$

$$p\theta_i = (\text{Phase of Pitch})_i/(180/\pi)$$

$$p\psi_i = (\text{Phase of Yaw})_i/(180/\pi) \tag{5}$$

3. Determine the real and imaginary parts:

$$\text{Real} = x_i \cdot \cos(px_i) + z^* \cdot \theta_i \cdot \cos(p\theta_i) - y^* \cdot \psi \cdot \cos(p\psi_i)$$

$$\text{Imaginary} = x_i \cdot \sin(px_i) + z^* \cdot \theta_i \cdot \sin(p\theta_i) - y^* \cdot \psi \cdot \sin(p\psi_i) \tag{6}$$

4. Determine the amplitude and phase of linear displacement:

$$(\text{Displacement Amplitude})_i = \sqrt{(\text{Real})^2 + (\text{Imaginary})^2}$$

$$(\text{Displacement Phase})_i = \text{Arctan}(\text{Imaginary/Real}) \tag{7}$$

5. Determine the amplitude and phase of linear velocity:

$$(\text{Velocity Amplitude})_i = \omega_{Ei} \; (\text{Displacement Amplitude})_i$$

$$(\text{Velocity Phase})_i = (\text{Displacement Phase})_i + \pi/2 \qquad (8)$$

6. Determine the amplitude and phase of linear acceleration:

$$(\text{Acceleration Amplitude})_i = \omega_{Ei} \; (\text{Velocity Amplitude})_i/g$$

$$(\text{Acceleration Phase})_i = (\text{Velocity Phase})_i + \pi/2 \qquad (9)$$

where g is the acceleration of gravity.

It should be noted that the amplitude resulcs, for each ω_{Ei}, of steps 4, 5, and 6 are in the form of dimensional transfer functions. Hence, the values should be squared in order to determine the RAOs at point (x*, y*, z*). Also, by definition, x* is positive aft, y* is positive starboard, and z* is positive upward. Further details are given in References 1 and 2.

Figures 1 through 4 present plots of the RAOs across wave frequency ω. Figures 1 and 2 present the curves for the DLG-26 at 10 and 20 knots, respectively, across all headings. Figures 3 and 4 present the DE-1078 plots in an identical manner.
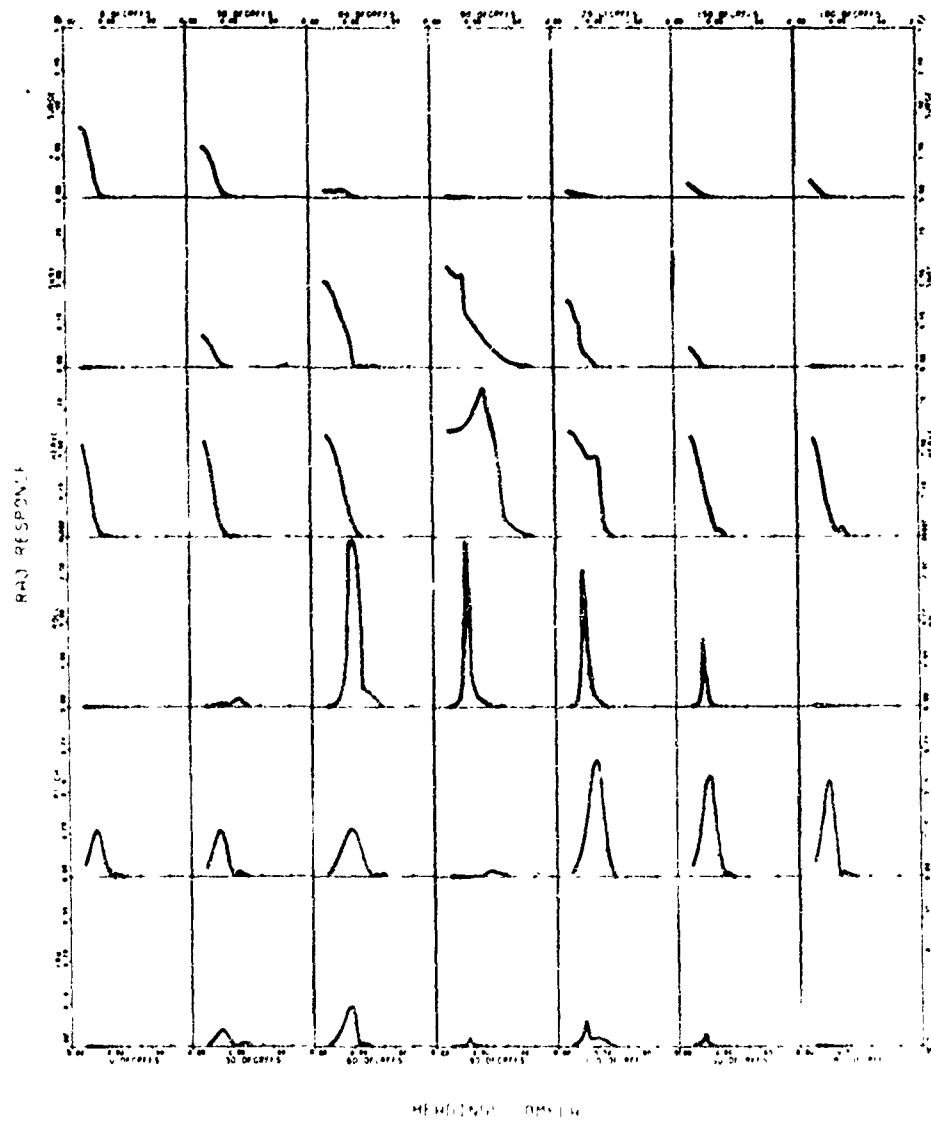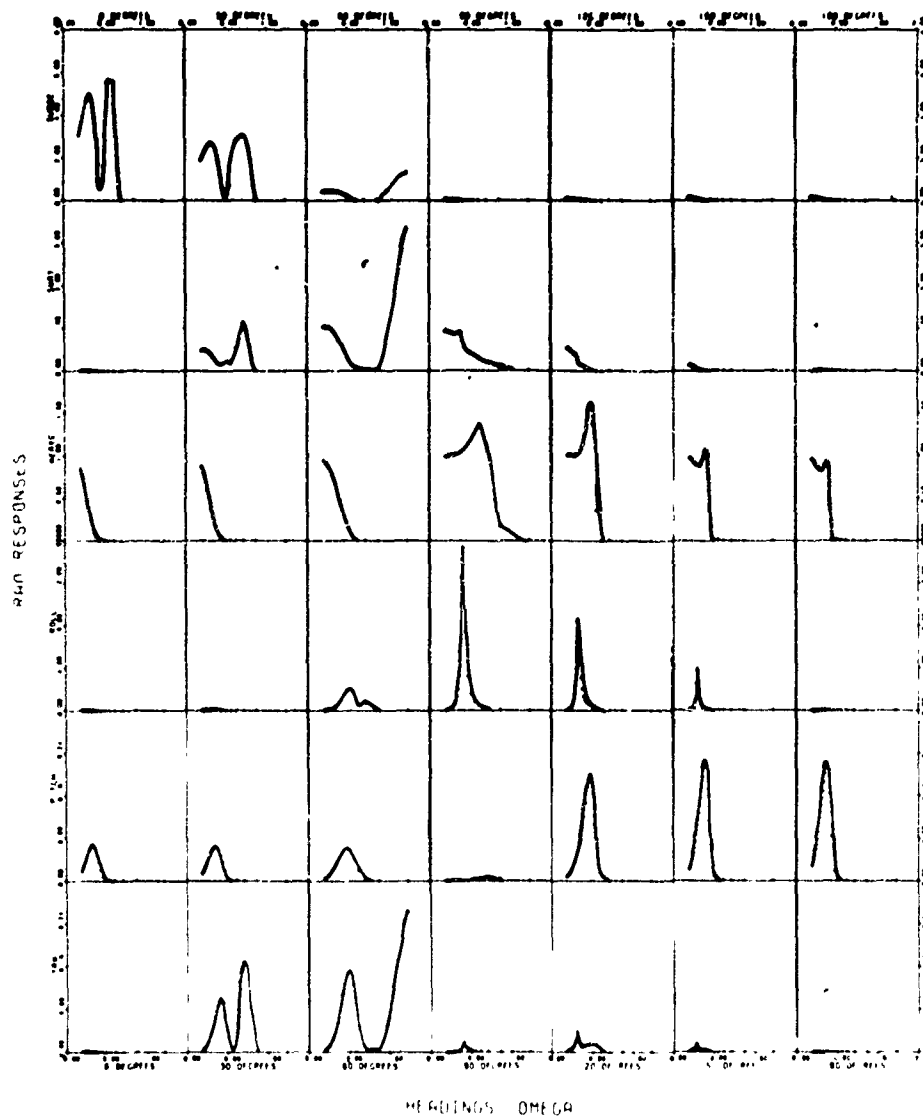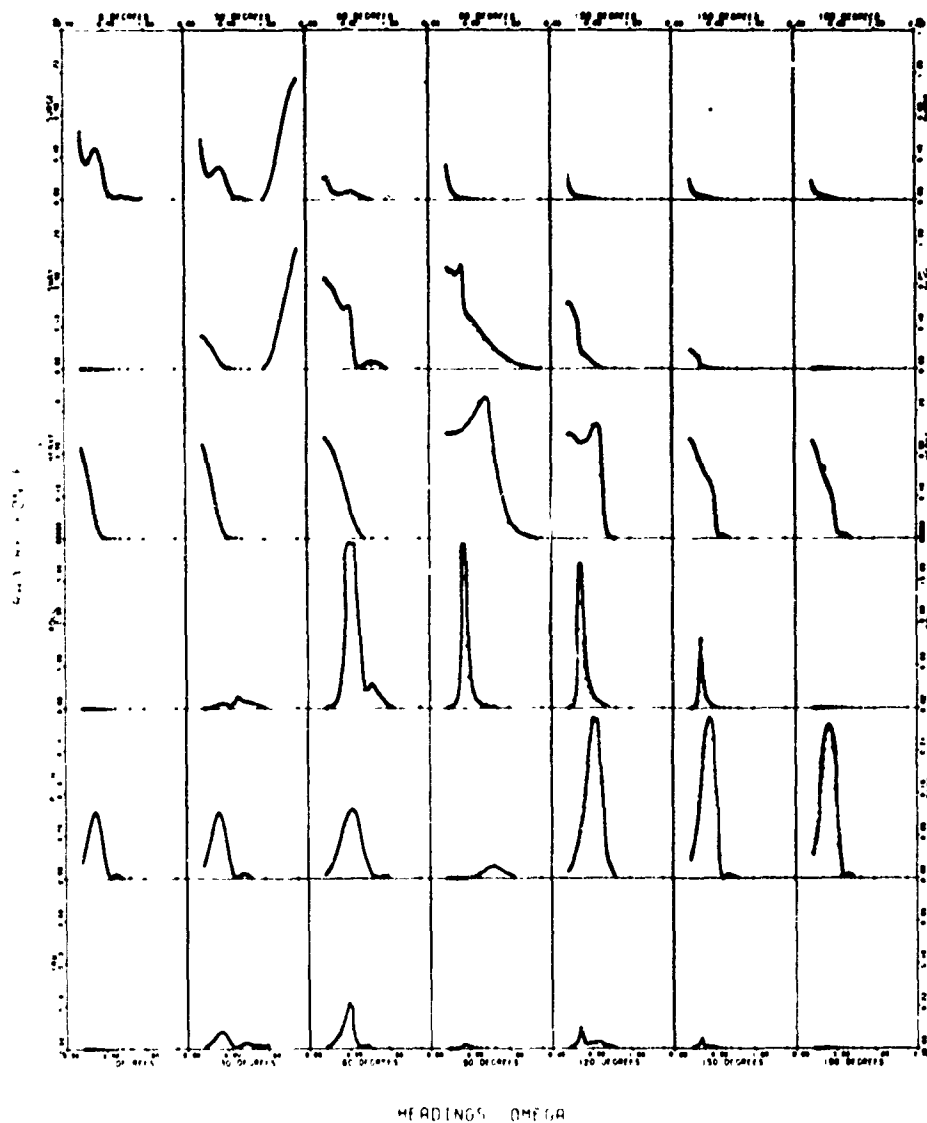
5

Figure 1 - DLG-26 Response Amplitude Operators, 10 Knots

DLG 26   SPEED = 20 KNOTS   RAO RESPONSES VERSUS OMEGA

Figure 2 - DLG-26 Response Amplitude Operators, 20 Knots

Figure 3 - DE-1078 Response Amplitude Operators, 10 Knots
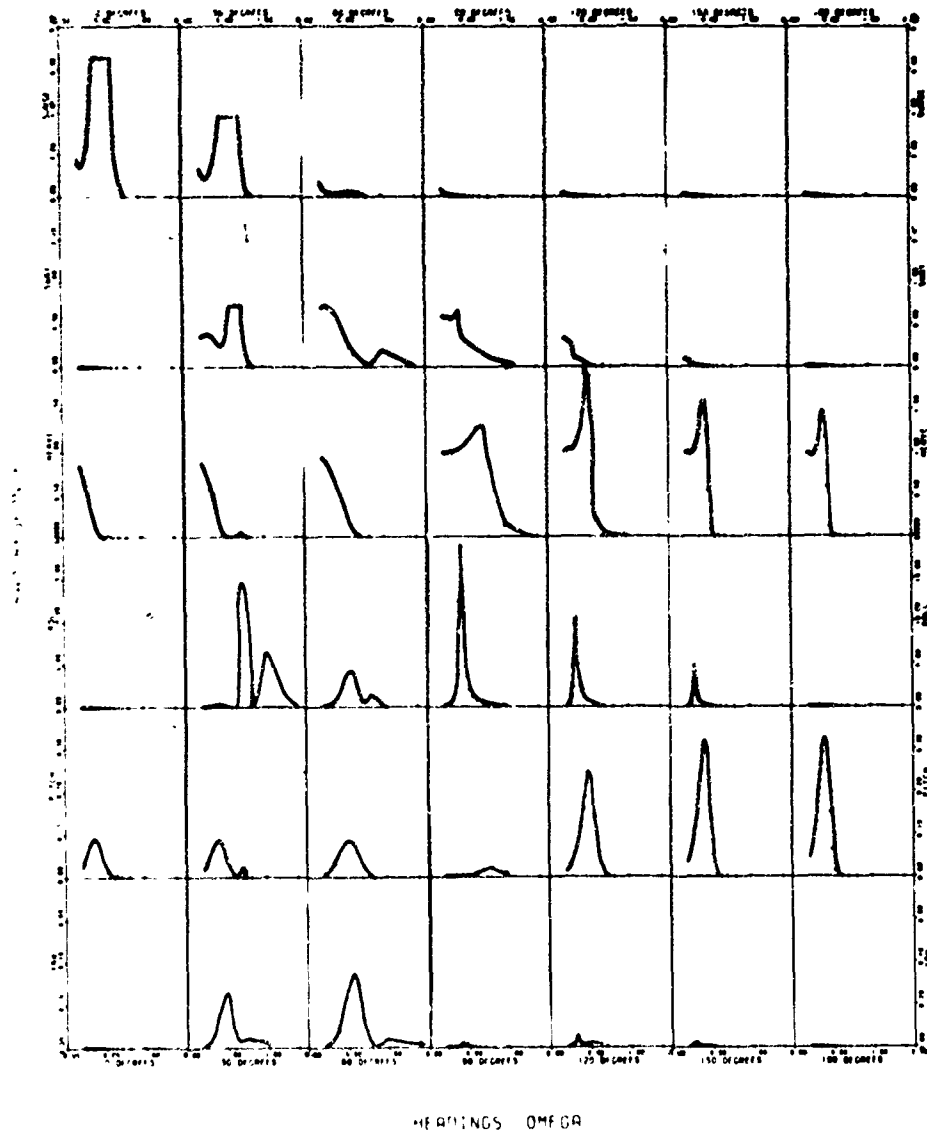
Figure 4 – DE-1078 Response Amplitude Operators, 20 Knots

9

TABLE 1 - SHIP PARTICULARS AND COMPUTER-FITTED BODY PLAN
FOR THE DLG-26 IN LAMPS CONFIGURATION

DLG 26 LAMPS CONFIGURATION
TABLE OF SHIP PARTICULARS

SHIP LENGTH(LBP)	L	524.00 FEET	LENGTH/BEAM	9.632
MAXIMUM BEAM*	B	54.40 FEET	BEAM/DRAFT	2.848
MAXIMUM DRAFT*	T	19.10 FEET	DRAFT/BEAM	.351
DISPLACEMENT	W	7922 TONS,SW	W/(.01L)**3	55.066
DESIGN SPEED	V	19.99 KNOTS	FROUDE NUMBER	.260
VERTICAL CG	KG	20.02 FEET	KG/BEAM	.368
METACENTRIC HT.	GM	5.58 FEET	GM/BEAM	.103
LONGITUD. CG**	LCG	6.64 FEET	LCG/LENGTH	.025
ROLL GYRADIUS	RRG	18.89 FEET	RRG/BEAM	.347
PITCH GYRADIUS	PRG	131.00 FEET	PRG/LENGTH	.250
YAW GYRADIUS	YRG	131.00 FEET	YRG/LENGTH	.250
EST. ROLL PERIOD		8.86 SECS	ROLL FREQ.(RAD)	.709
TRANSOM WIDTH	TW	29.20 FEET	TW/BEAM	.537
WATERPLANE AREA	AWP	21063 SQ. FEET	AWP/(LB)	.739
WETTED SURFACE	WS	32265 SQ. FEET	WS/(2LT+2BT+LB)	.638
BILGE KEEL WS	BWS	1538 SQ. FEET	BWS/WS	.048
LONGITUD. CB**	LCB	6.64 FEET	LCB/LENGTH	.025
LONGITUD. CF**	LCF	-.10 FEET	LCF/LENGTH	-.000
VERTICAL CB	KB	11.29 FEET	KB/BEAM	.207
METACENTER	KM	25.60 FEET	KM/BEAM	.471
BLOCK COEFF.	CB	.51		
SECTION COEFF.	CX	.82		
PRISMATIC COEFF.	CP	.62		

* AT STA. 11.00   ** AFT OF MIDSHIPS

STATION SPACING = 26.60 FEET

SCALE: 1 INCH = 7.05 FEET
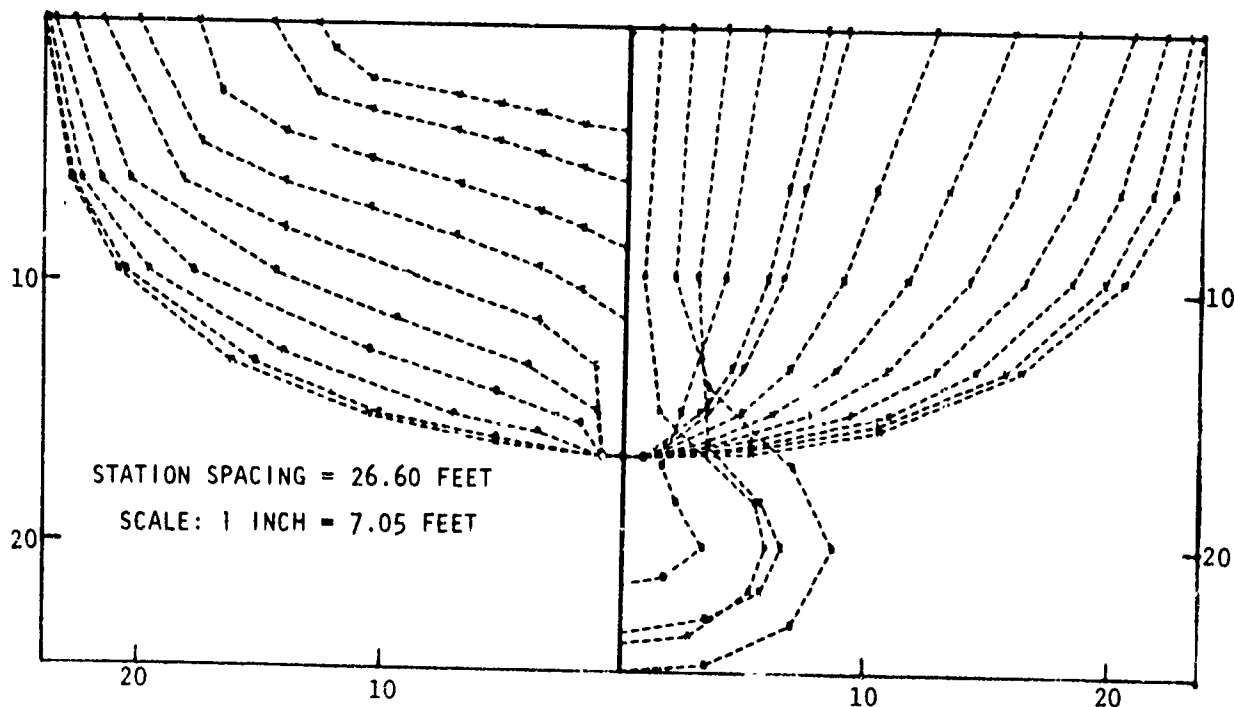
10

TABLE 2 - SHIP PARTICULARS AND COMPUTER-FITTED BODY PLAN
FOR THE DE-1078 IN LAMPS CONFIGURATION

DE 1078 LAMPS CONFIGURATION
TABLE OF SHIP PARTICULARS

SHIP LENGTH(LBP)	L	415.00 FEET	LENGTH/BEAM	8.944
MAXIMUM BEAM*	B	46.40 FEET	BEAM/DRAFT	2.994
MAXIMUM DRAFT*	T	15.50 FEET	DRAFT/BEAM	.334
DISPLACEMENT	W	4179 TONS,SW	W/(.01L)**3	58.481
DESIGN SPEED	V	20.00 KNOTS	FROUDE NUMBER	.292

VERTICAL CG	KG	17.50 FEET	KG/BEAM	.377
METACENTRIC HT.	GM	4.47 FEET	GM/BEAM	.096
LONGITUD. CG**	LCG	-1.97 FEET	LCG/LENGTH	-.009

ROLL GYRADIUS	RRG	16.01 FEET	RRG/BEAM	.345
PITCH GYRADIUS	PRG	103.75 FEET	PRG/LENGTH	.250
YAW GYRADIUS	YRG	103.75 FEET	YRG/LENGTH	.250
EST. ROLL PERIOD		8.39 SECS	ROLL FREQ.(RAD)	.749

TRANSOM WIDTH	TW	35.60 FEET	TW/BEAM	.767
WATERPLANE AREA	AWP	14245 SQ. FEET	AWP/(LB)	.740
WETTED SURFACE	WS	21098 SQ. FEET	WS/(2LT+2BT+LB)	.629
BILGE KEEL WS	BWS	435 SQ. FEET	BWS/WS	.021

LONGITUD. CB**	LCB	-1.97 FEET	LCB/LENGTH	-.009
LONGITUD. CF**	LCF	-.14 FEET	LCF/LENGTH	-.001
VERTICAL CB	KB	9.03 FEET	KB/BEAM	.195
METACENTER	KM	21.97 FEET	KM/BEAM	.473

BLOCK COEFF.	CB	.49
SECTION COEFF.	CX	.81
PRISMATIC COEFF.	CP	.61

* AT STA. 11.00   ** AFT OF MIDSHIPS

STATION SPACING = 20.75 FEET

SCALE: 1 INCH = 6.19 FEET
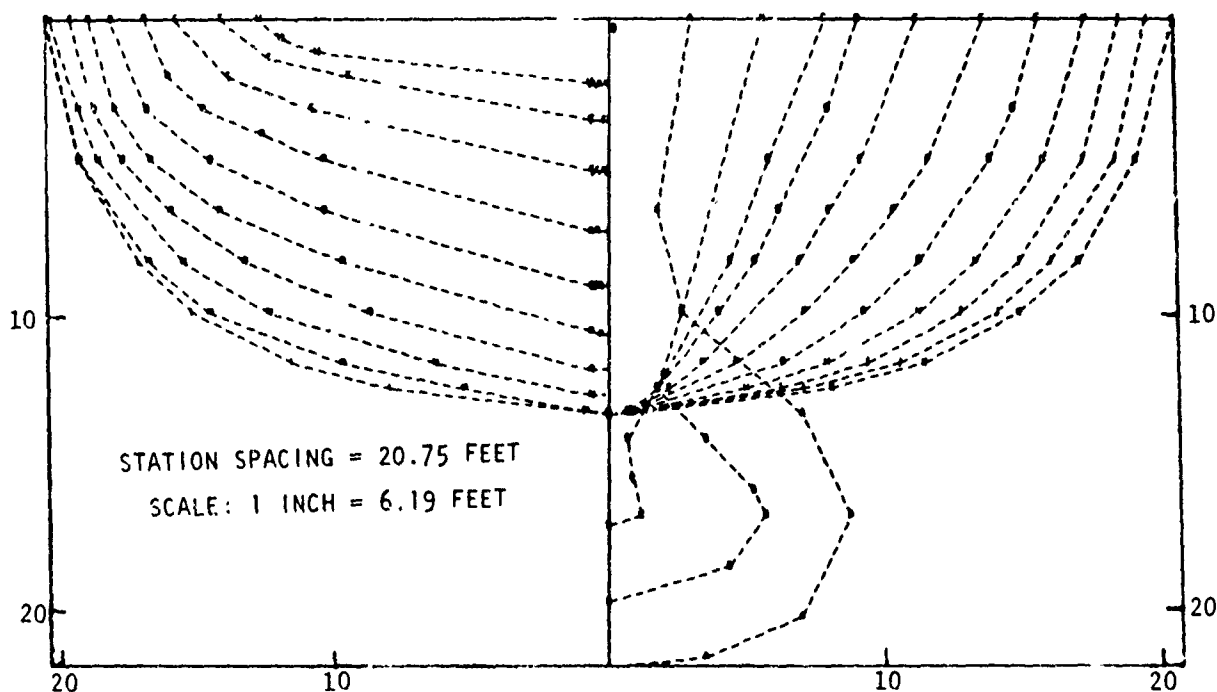
APPENDIX

SUMMARY OF INVESTIGATION

TABLE 3 — DLG-26, RESPONSE AMPLITUDE OPERATORS, 0 DEGREES, 10 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DLG-26 LAMPS CONFIGURATION (DRAFT=19.1FT)

HEADING = 0. DEG   SHIP SPEED = 9.99 KNOTS   WAVE SLOPE (360*P/LAMBDA), K*R, = 2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .1300   WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAML	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.255	.238	4.24	1.3279E+00	-102.7	8.9875E-15	-90.0	8.7150E-01	-115.3	2.1330E-16	-115.3	2.1348E-02	87.0	2.0470E-16	-166.9
.263	.256	3.93	1.3214E+00	-102.3	8.8231E-15	-90.9	9.5242E-01	-116.5	3.3735E-16	-116.5	2.4943E-02	86.7	2.3661E-16	-166.5
.271	.278	3.63	1.3170E+00	-101.9	8.6066E-15	-91.1	8.2871E-01	-117.7	4.1110E-16	-117.7	2.4671E-02	86.3	2.7560E-16	-165.9
.277	.294	3.40	1.3117E+00	-101.7	8.4269E-15	-91.3	8.1964E-01	-118.6	4.7389E-16	-118.6	3.1505E-02	86.0	3.0675E-16	-165.5
.284	.312	3.20	1.3037E+00	-101.4	8.2134E-15	-91.5	7.8730E-01	-119.5	5.5137E-16	-119.5	3.4906E-02	85.7	3.4270E-16	-165.0
.291	.333	3.00	1.2922E+00	-101.2	8.0264E-15	-91.7	7.6225E-01	-120.5	6.5175E-16	-120.5	3.8792E-02	85.3	3.9124E-16	-164.6
.299	.357	2.80	1.2759E+00	-101.0	7.8303E-15	-91.9	7.3367E-01	-121.5	7.8338E-16	-121.5	4.3329E-02	84.8	4.5411E-16	-164.3
.307	.385	2.60	1.2529E+00	-100.6	7.5731E-15	-92.2	6.9939E-01	-122.4	9.5411E-16	-122.4	4.8550E-02	84.2	5.2401E-16	-163.8
.317	.417	2.40	1.2236E+00	-100.4	7.2146E-15	-92.7	6.5811E-01	-123.4	1.1707E-15	-123.4	5.4483E-02	83.5	6.1484E-16	-163.2
.327	.455	2.20	1.1754E+00	-100.5	6.7423E-15	-93.3	6.0777E-01	-124.2	1.4779E-15	-124.2	6.1143E-02	82.6	7.1633E-16	-162.3
.338	.500	2.00	1.1123E+00	-100.4	6.1355E-15	-94.2	5.4659E-01	-124.9	1.8804E-15	-124.9	6.8407E-02	81.6	8.3321E-16	-161.3
.344	.526	1.90	1.0724E+00	-100.3	5.7735E-15	-94.8	5.1118E-01	-125.2	2.1314E-15	-125.2	7.2154E-02	81.0	8.9690E-16	-160.7
.351	.556	1.80	1.0244E+00	-100.3	5.3691E-15	-95.6	4.7219E-01	-125.3	2.4220E-15	-125.3	7.5860E-02	80.3	9.6312E-16	-160.0
.357	.588	1.70	9.6830E-01	-100.3	4.9205E-15	-96.6	4.2938E-01	-125.3	2.7564E-15	-125.3	7.9376E-02	79.5	1.0303E-15	-159.2
.365	.625	1.60	9.0238E-01	-100.4	4.4271E-15	-97.8	3.8264E-01	-125.2	3.1366E-15	-125.2	8.2401E-02	78.6	1.0950E-15	-158.5
.372	.667	1.50	8.2524E-01	-100.5	3.8912E-15	-99.4	3.3203E-01	-124.8	3.5596E-15	-124.8	8.4855E-02	77.5	1.1555E-15	-157.2
.380	.714	1.40	7.3562E-01	-100.7	3.3187E-15	-101.5	2.7793E-01	-124.1	4.3124E-15	-124.1	8.6444E-02	76.3	1.2025E-15	-156.0
.389	.769	1.30	6.3290E-01	-101.1	2.7607E-15	-104.4	2.2232E-01	-122.9	4.5099E-15	-122.9	8.5695E-02	74.7	1.2499E-15	-154.5
.398	.833	1.20	5.1736E-01	-101.7	2.1326E-15	-108.4	1.6570E-01	-120.9	4.9560E-15	-120.9	8.2770E-02	72.6	1.2499E-15	-152.7
.408	.909	1.10	3.9168E-01	-102.7	1.5786E-15	-114.5	1.1074E-01	-117.7	5.2230E-15	-117.7	7.6227E-02	70.3	1.1921E-15	-150.4
.419	1.000	1.00	2.6260E-01	-104.6	1.0766E-15	-124.0	6.1606E-02	-112.6	5.1210E-15	-112.6	6.5043E-02	67.0	1.0451E-15	-147.6
.430	1.111	.90	1.4298E-01	-108.4	6.9897E-16	-139.0	2.4191E-02	-103.6	4.4447E-15	-103.6	4.892E-02	62.3	7.4902E-16	-143.3
.441	1.250	.80	5.2463E-02	-118.5	4.7662E-16	-160.4	3.8639E-03	23.9	3.2218E-15	-85.6	2.9215E-02	55.8	4.4103E-16	-136.4
.453	1.429	.70	1.0016E-02	-158.5	3.5808E-16	176.2	2.0934E-03	133.6	2.3963E-15	-46.0	1.4547E-02	39.9	1.1157E-16	-121.6
.465	1.667	.60	1.4159E-02	130.7	3.9449E-16	157.2	8.8641E-03	155.5	2.2395E-15	3.3	1.6266E-03	-21.4	2.0015E-17	2.7
.476	2.000	.50	1.2151E-02	114.3	4.3393E-18	117.7	5.7322E-03	155.2	7.4296E-15	37.3	4.4672E-03	-109.2	2.0306E-16	69.1
.459	2.500	.40	2.8664E-03	-49.7	1.1165E-16	-25.3	2.6646E-04	-11.5	1.0563E-15	90.0	2.1870E-03	-157.8	7.0515E-17	100.5
.377	3.333	.30	3.5421E-06	19.4	5.9252E-17	128.3	4.3958E-05	-35.6	1.2617E-15	-99.7	1.3499E-03	40.5	7.0695E-16	-103.0
.377	5.000	.28	3.5949E-03	-52.1	1.0094E-17	20.7	3.6243E-06	-59.3	4.6310E-16	-165.0	9.9520E-05	82.6	7.1079E-16	-161.1
.0610.000	.18		2.1315E+00	149.2	3.4624E-14	100.5	2.5429E-05	43.7	1.9240E-17	43.7	1.5801E-05	-6.3	2.7625E-16	54.6

TABLE 4 - DLG-26, RESPONSE AMPLITUDE OPERATORS, 0 DEGREES, 20 KNOTS

***

SHIP MOTIONS IN REGULAR WAVES ***   DLG-26 LAMPS CONFIGURATION (DRAFT=19.1FT)

HEADING = 0. DEG   SHIP SPEED = 19.99 KNOTS   WAVE SLOPE (360*R/LAMBDA), K*R, = 2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .2600   WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.207	.238	4.20	3.0158E+00	-102.0	1.6147E-16	-92.2	8.4613E-01	.2	2.6654E-16	-123.6	1.8045E-02	84.9	1.5580E-16	-192.2
.211	.256	3.91	3.1426E+00	-101.6	1.6369E-16	-92.5	8.2659E-01	.2	3.1702E-16	-124.8	2.0655E-02	84.5	1.3529E-16	-152.7
.215	.278	3.60	3.2688E+00	-101.1	1.6565E-16	-92.8	8.0261E-01	.2	3.8248E-16	-126.1	2.3815E-02	84.1	2.4731E-16	-153.1
.218	.294	3.40	3.3988E+00	-100.8	1.6672E-16	-93.0	7.8350E-01	.1	4.3731E-16	-127.0	2.6272E-02	83.7	2.9159E-16	-153.3
.221	.312	3.23	3.5208E+00	-100.6	1.6751E-16	-93.3	7.6131E-01	.1	5.0387E-16	-127.9	2.9067E-02	83.4	3.4617E-16	-153.4
.224	.333	3.00	3.6557E+00	-100.3	1.6790E-16	-93.7	7.3537E-01	.1	5.8538E-16	-128.9	3.2249E-02	82.9	4.1419E-16	-153.5
.227	.357	2.80	3.8052E+00	-100.0	1.6774E-16	-94.2	7.0488E-01	.0	6.8605E-16	-129.9	3.5869E-02	82.5	5.0002E-16	-153.5
.230	.385	2.60	3.9724E+00	-99.7	1.6678E-16	-94.9	6.6801E-01	-.0	8.1134E-16	-130.9	3.9972E-02	81.9	6.0974E-16	-153.4
.232	.417	2.40	4.1518E+00	-99.4	1.6469E-16	-95.7	6.2592E-01	-.1	9.6820E-16	-132.0	4.4583E-02	81.2	7.5195E-16	-153.2
.235	.455	2.20	4.3479E+00	-99.1	1.6130E-16	-96.8	5.7460E-01	-.2	1.1649E-15	-133.0	4.9677E-02	80.4	3.3866E-16	-152.9
.237	.500	2.00	4.5532E+00	-98.8	1.5500E-14	-98.5	5.1331E-01	-.3	1.4100E-15	-133.9	5.5113E-02	79.4	1.1077E-15	-152.5
.238	.526	1.90	4.6553E+00	-98.7	1.5085E-14	-99.5	4.7825E-01	-.3	1.5526E-15	-134.4	5.7856E-02	78.7	1.3429E-15	-152.2
.238	.556	1.80	4.7531E+00	-98.5	1.4575E-14	-100.8	4.3990E-01	-.4	1.7082E-15	-134.8	6.0513E-02	77.3	1.5220E-15	-151.9
.238	.588	1.70	4.8415E+00	-98.2	1.3954E-14	-102.5	3.9034E-01	-.4	1.8751E-15	-135.1	6.2961E-02	76.3	1.7301E-15	-151.0
.237	.625	1.60	4.9120E+00	-98.3	1.3266E-14	-104.6	3.5530E-01	-.5	2.0487E-15	-135.3	6.5022E-02	75.3	1.9704E-15	-151.2
.236	.667	1.53	4.9503E+00	-98.2	1.2319E-14	-167.3	3.0498E-01	-.6	2.2202E-15	-135.6	6.6443E-02	74.0	2.2451E-15	-150.0
.233	.714	1.40	4.9545E+00	-98.1	1.1231E-14	-116.9	2.5384E-01	-.6	2.3739E-15	-135.6	6.6877E-02	72.6	2.5537E-15	-150.3
.230	.769	1.35	4.8826E+00	-98.2	1.0143E-14	-115.9	2.0681E-01	-.6	2.4839E-15	-135.5	6.5859E-02	70.8	2.8005E-15	-149.7
.224	.833	1.20	4.7035E+00	-98.3	8.9438E-15	-122.9	1.4758E-01	-.5	2.5593E-15	-135.1	6.2806E-02	68.6	3.2277E-15	-149.1
.216	.909	1.10	4.3648E+00	-98.6	7.8567E-15	-133.0	9.6842E-02	-.0	2.3952E-15	-134.3	5.7059E-02	65.9	3.5221E-15	-140.2
.205	1.000	1.00	3.7967E+00	-99.5	7.1699E-15	-147.4	5.2570E-02	1.3	2.0727E-15	-132.9	4.8048E-02	62.3	3.6746E-15	-140.2
.188	1.111	.90	2.9240E+00	-101.5	7.4034E-15	-166.3	1.9778E-02	5.5	1.4979E-15	-130.3	3.5693E-02	56.9	3.5194E-15	-140.5
.164	1.250	.80	1.7266E+00	-107.3	9.3256E-15	172.2	3.6748E-03	26.8	7.4926E-16	-124.3	2.1231E-02	46.6	2.8879E-15	-150.7
.127	1.429	.70	5.4419E-01	-136.4	1.4333E-14	150.5	7.8536E-03	127.2	1.4860E-16	-96.9	7.9506E-03	8.3	1.6577E-16	153.3
.069	1.667	.60	1.6137E-01	134.7	2.1074E-14	123.5	4.3173E-03	146.0	2.3711E-16	11.0	8.6600E-04	-101.4	3.5765E-15	100.2
.035	2.000	.50	3.0031E-01	113.4	9.0822E-14	67.9	8.0797E-04	144.1	9.3166E-16	32.4	1.1681E-03	-113.9	1.6322E-15	70.0
.215	2.500	.40	4.7027E-01	-19.2	2.0583E-12	-46.2	2.7017E-05	-18.5	2.2496E-16	39.1	6.7851E-04	48.4	3.6605E-16	-112.7
.635	3.333	.30	9.6035E-03	-3.3	1.7226E-15	138.0	4.5786E-04	-46.1	1.8789E-16	-116.7	8.2162E-04	84.3	5.5461E-16	-119.6
5.00	5.000	.20	1.1013E-03	-53.0	4.0473E-16	-129.0	1.6120E-05	-38.7	2.5143E-13	-116.0	1.5110E-04		1.2600E-19	29.8
2.08-10.00	10.000	.10	9.0835E-07	131.6	2.2180E-20	90.0		-176.2	8.4210E-19	-156.9	1.1573E-06	-17.7		

14

TABLE 5 - DLG-26, RESPONSE AMPLITUDE OPERATORS, 30 DEGREES, 10 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DLG-26 LAMPS CONFIGURATION (DRAFT=13.1FT)

•••

HEADING = 30. DEG   SHIP SPEED = 9.99 KNOTS   WAVE SLOPE (360*R/LAMBDA), K*R, = 2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .130   WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM LAM/-	(SURGE/R)**2 AMPL.RATIO SQUARED	PHASE DEG	(SWAY/R)**2 AMPL.RATIO SQUARED	PHASE DEG	(HEAVE/R)**2 AMPL.RATIO SQUARED	PHASE DEG	(ROLL/R)**2 AMPL.RATIO SQUARED	PHASE DEG	(PITCH/R)**2 AMPL.RATIO SQUARED	PHASE DEG	(YAW/R)**2 AMPL.RATIO SQUARED	PHASE DEG
.261	.238 4.20	9.4285E-01	-104.3	2.9367E-01	89.4	8.9941E-01	.2	3.2608E-03	68.0	1.6621E-02	87.5	4.9355E-03	12.4
.27.	.256 3.9.	9.4074E-01	-103.5	2.888.E-01	89.3	8.8397E-01	.2	1.1086E-02	66.9	1.9149E-02	87.2	5.6076E-03	12.9
.279	.278 3.6.	9.371uE-01	-103.4	2.825.E-01	89.2	8.6663E-01	.3	1.3495E-02	65.7	2.2031E-02	86.9	6.6184E-03	13.4
.285	.294 3.4.	9.334uE-01	-103.1	2.774.E-01	89.1	8.489uE-01	.3	1.5551E-02	64.8	2.4329E-02	66.7	7.3460E-03	13.9
.294	.312 3.20	9.2847E-01	-102.9	2.7454E-01	89.0	8.3225E-01	.3	1.8216E-02	63.9	2.7113E-02	86.3	8.3990E-03	14.1
.3.6	.335 3.00	9.2164E-01	-102.6	2.7148E-01	88.9	8.1311E-01	.3	2.1641E-02	62.9	3.0389E-02	85.9	9.7151E-03	14.3
.3.9	.357 2.83	9.1211E-01	-102.4	2.6664E-01	88.7	7.9005E-01	.3	2.6053E-02	61.9	3.4211E-02	85.4	1.1265E-02	14.6
.318	.385 2.6.	8.9089E-01	-102.2	2.5963E-01	88.5	7.6211E-01	.3	3.1838E-02	60.9	3.864GE-02	84.9	1.3101E-02	15.0
.328	.417 2.4.	8.8056E-01	-102.0	2.4999E-01	88.2	7.2787E-01	.3	3.9571E-02	59.9	4.3906E-02	84.3	1.5286E-02	15.6
.339	.455 2.2.	8.5519E-01	-101.9	2.3713E-01	87.7	6.8558E-01	.3	5.0122E-02	58.9	4.9995E-02	83.6	1.7091E-02	16.4
.352	.50. 2.0.	8.1954E-01	-101.7	2.2032E-01	87.1	6.3294E-01	.3	6.4822E-02	57.9	5.7675E-02	82.7	2.0980E-02	17.4
.358	.526 1.9.	7.9673E-01	-101.7	2.1017E-01	86.6	6.0188E-01	.3	7.4326E-02	57.6	6.5845E-02	82.2	2.2737E-02	18.6
.366	.556 1.80	7.6968E-01	-101.7	1.9871E-01	86.1	5.6710E-01	.3	4.5740E-02	57.2	6.4864E-02	81.6	2.4610E-02	18.8
.373	.588 1.7.	7.3757E-01	-101.7	1.8561E-01	85.5	5.2820E-01	.3	9.9357E-02	57.0	6.9000E-02	81.8	2.6621E-02	19.3
.384	.625 1.60	6.9944E-01	-101.7	1.7138E-01	84.7	4.8475E-01	.4	1.1576E-01	56.9	7.5139E-02	80.2	2.8715E-02	20.1
.390	.667 1.50	6.5435E-01	-101.8	1.5695E-01	83.7	4.3835E-01	.3	1.3695E-01	57.0	7.7418E-02	79.2	3.1431E-02	21.1
.39.	.714 1.4.	6.0092E-01	-102.0	1.4339E-01	82.5	3.8675E-01	.3	1.0239E-01	57.3	8.1284E-02	78.1	3.4099E-02	22.2
.41.	.769 1.3.	5.3796E-01	-102.2	1.2177E-01	80.8	3.2995E-01	.4	1.9238E-01	58.1	8.4484E-02	76.8	3.6580E-02	23.6
.421	.833 1.2.	4.6454E-01	-102.6	1.0388E-01	78.4	2.6845E-01	.4	2.2644E-01	59.3	8.5737E-02	75.2	3.8311E-02	25.2
.433	.909 1.10	3.8054E-01	-103.3	7.9388E-02	75.0	2.0367E-01	.5	2.6221E-01	61.3	8.4657E-02	73.1	3.8955E-02	27.3
.446	1.0.0 1.0.	2.8741E-01	-104.4	5.8424E-02	69.7	1.3859E-01	.9	2.3356E-01	64.5	7.9722E-02	70.5	3.7624E-02	29.8
.460	1.111 .9.	1.9025E-01	-106.5	3.8746E-02	61.5	7.8367E-02	1.6	3.0780E-01	69.9	6.9429E-02	66.9	3.3269E-02	33.2
.475	1.250 .8.	9.9595E-02	-110.8	2.3034E-02	47.8	3.6734E-02	4.0	7.0524E-01	79.5	5.2639E-02	61.7	2.4911E-02	38.1
.492	1.429 .7.	3.2728E-02	-122.9	1.3006E-02	25.5	4.4328E-03	16.3	2.1927E-01	100.9	3.0674E-02	53.1	1.3043E-02	47.2
.51.	1.667 .6.	4.6655E-03	-175.6	7.5512E-03	-4.6	2.2646E-03	141.9	1.9590E-01	148.8	9.6859E-03	33.7	2.3025E-03	75.2
.528	2.0.0 .5.	1.0957E-02	120.4	2.7655E-03	-40.8	9.3608E-03	157.6	4.3615E-01	-157.6	1.9546E-03	-53.2	7.0316E-03	-156.1
.544	2.5.0 .4.	2.6428E-03	97.2	8.6339E-04	-162.4	2.0512E-03	151.4	6.6065E-01	-117.4	5.4461E-03	-126.1	7.0316E-03	-114.6
.55.	3.333 .3.	4.9388E-03	-58.4	3.3644E-04	146.6	1.6414E-03	-24.8	1.7024E-01	-29.9	9.3312E-04	90.0	9.3150E-03	25.2
.512	5.0.0 .2.	3.9712E-04	170.1	8.8675E-04	121.8	6.5602E-05	139.1	8.3413E-02	-97.1	6.8226E-04	-148.6	2.5058E-03	-107.7
.2110.0.0	.1.	3.1605E-03	-68.0	2.4733E-02	119.7	1.4846E-05	3.7	5.8352E-04	-130.0	1.9790E-05	167.5	6.1544E-04	-119.1

TABLE 6 – DLG-26, RESPONSE AMPLITUDE OPERATORS, 30 DEGREES, 20 KNOTS

SHIP MOTIONS IN REGULAR WAVES •••   DLG-26 LAMPS CONFIGURATION (DRAFT=19.1FT)

HEADING = 30. DEG   SHIP SPEED = 19.99 KNOTS   WAVE SLOPE (360*R/LAMBDA), K*R, = 2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .2600   WAVE STEEPNESS (2*R/LAMBDA) = 1 / 88

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.220	.238	4.20	1.8647E+00	-103.7	4.7563E-01	88.3	8.7728E-01	.1	9.6821E-03	60.3	1.3718E-02	84.5	3.9531E-03	24.7
.225	.256	3.91	1.9240E+00	-103.2	4.8419E-01	88.1	8.6152E-01	.1	1.0319E-02	59.1	1.5781E-02	84.3	4.0695E-03	24.6
.230	.278	3.60	1.9916E+00	-102.8	4.8391E-01	87.9	8.4204E-01	.1	1.2468E-02	57.9	1.8295E-02	84.0	6.0646E-03	24.2
.234	.294	3.40	2.0421E+00	-102.5	4.8571E-01	87.7	8.2643E-01	.1	1.4239E-02	56.9	2.0276E-02	83.7	7.0720E-03	24.1
.238	.312	3.20	2.0974E+00	-102.1	4.8673E-01	87.5	8.0819E-01	.0	1.6424E-02	56.0	2.2553E-02	83.4	8.3067E-03	24.1
.242	.333	3.00	2.1579E+00	-101.9	4.8672E-01	87.2	7.8674E-01	.3	1.3120E-02	55.0	2.5179E-02	83.1	9.0307E-03	24.1
.246	.357	2.80	2.2241E+00	-101.6	4.8528E-01	86.9	7.6134E-01	-.0	2.2464E-02	53.9	2.8215E-02	82.7	1.1744E-02	24.1
.250	.385	2.60	2.2961E+00	-101.3	4.8108E-01	86.4	7.3103E-01	-.1	2.6726E-02	52.8	3.1736E-02	82.3	1.4177E-02	24.3
.253	.417	2.40	2.3735E+00	-101.6	4.7574E-01	85.9	6.9461E-01	-.1	3.2146E-02	51.7	3.5794E-02	81.7	1.7317E-02	24.3
.257	.455	2.20	2.4551E+00	-100.7	4.6576E-01	85.1	6.5050E-01	-.2	3.3132E-02	50.6	4.0466E-02	81.0	2.1636E-02	24.8
.264	.500	2.00	2.5374E+00	-100.4	4.5028E-01	84.0	7.9675E-01	-.3	3.1190E-02	49.6	4.5759E-02	80.1	2.6929E-02	25.1
.266	.526	1.90	2.5757E+00	-100.3	4.3977E-01	83.3	5.6546E-01	-.4	5.3699E-02	48.9	4.8614E-02	79.6	3.0356E-02	25.4
.268	.556	1.80	2.6129E+00	-100.2	4.2691E-01	82.5	5.3099E-01	-.5	5.3944E-02	48.4	5.1567E-02	79.0	3.4350E-02	25.6
.271	.588	1.70	2.6435E+00	-100.1	4.1125E-01	81.4	4.9277E-01	-.6	6.6991E-02	47.9	5.4560E-02	78.3	3.9037E-02	25.9
.272	.625	1.60	2.6652E+00	-100.0	3.9226E-01	80.1	4.5056E-01	-.7	7.4852E-02	47.4	5.7496E-02	77.5	4.4513E-02	26.3
.273	.667	1.53	2.6723E+00	-99.9	3.6937E-01	78.4	4.6413E-01	-.8	9.3448E-02	47.1	6.0223E-02	76.5	5.0907E-02	26.7
.275	.714	1.40	2.6596E+00	-99.8	3.4201E-01	76.2	3.5537E-01	-1.0	9.2529E-02	46.8	6.2509E-02	75.3	5.8322E-02	27.1
.275	.769	1.33	2.6146E+00	-99.8	3.0978E-01	73.3	2.9846E-01	-1.2	1.5153E-01	46.7	6.4006E-02	74.0	6.6791E-02	27.7
.275	.833	1.20	2.5230E+00	-99.9	2.7274E-01	69.1	2.4009E-01	-1.4	1.0936E-01	47.1	6.4212E-02	72.3	7.6175E-02	28.3
.271	.909	1.10	2.3637E+00	-100.2	2.3203E-01	63.0	1.7981E-01	-1.6	1.1400E-01	47.1	6.2431E-02	70.2	8.5934E-02	29.0
.265	1.000	1.00	2.1007E+00	-100.7	1.9108E-01	53.8	1.2046E-01	-1.7	1.1257E-01	48.0	5.7777E-02	67.5	9.0786E-02	29.6
.256	1.111	.90	1.7262E+00	-101.8	1.5743E-01	39.6	6.6729E-02	-1.5	1.0336E-01	49.8	4.9318E-02	64.1	9.9516E-02	30.6
.242	1.250	.80	1.1967E+00	-104.4	1.4497E-01	18.0	2.5313E-02	13.6	7.4200E-02	53.4	3.6567E-02	59.3	9.7715E-02	31.2
.218	1.429	.70	5.6966E-01	-112.2	1.6943E-01	-5.3	3.3885E-03	136.0	3.5993E-02	62.6	2.0605E-02	51.9	7.2057E-02	30.8
.177	1.667	.60	1.2334E-01	-157.7	2.1589E-01	-26.1	2.1294E-03	148.6	6.7157E-03	106.1	6.2922E-03	37.1	2.9764E-02	22.3
.106	2.000	.50	6.7431E-02	121.0	1.6704E-01	-58.2	7.3030E-03	148.2	2.1690E-02	-163.6	6.2965E-04	-40.9	7.7149E-03	-64.0
.035	2.500	.40	2.1001E+00	105.2	5.2650E-01	-177.3	1.1250E-03	136.3	3.8630E-02	-167.3	2.1066E-03	-119.3	7.6072E-02	-110.4
.364	3.333	.30	1.8265E-03	-50.8	4.3702E+01	97.8	1.7069E-03	-57.1	3.4546E-03	44.5	9.7151E-05	-150.5	1.6726E-01	120.3
5.400	5.000	.20	3.3019E-06	166.7	7.1304E-03	127.6	5.6140E-05	141.3	1.5153E-02	-111.0	4.1000E-05	-144.3	3.9609E-03	115.8
1.5411.000	.10			-85.2	3.6141E-05	133.9	1.1209E-04	37.1	5.4817E-05	158.4	4.3467E-05	-84.0	1.3033E-05	-.0

TABLE 7 - DLG-26, RESPONSE AMPLITUDE OPERATORS, 60 DEGREES, 10 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DLG-26 LAMPS CONFIGURATION (DRAFT=19.1FT)

                                                                                        •••

HEADING = 60. DEG	SHIP SPEED = 9.99 KNOTS	WAVE SLOPE (360*R/LAMBDA), K*R_i = 2.25 DEG
(HEAD SEAS=180)	FROUDE NUMBER = .1300	WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.279	.238	4.20	2.9243E-1	-111.6	9.0259E-01	89.7	3.5855E-01	.2	2.7745E-02	77.2	9.4772E-03	88.7	4.3746E-03	11.2
.289	.256	3.9.	2.8896E-01	-110.9	7.9615E-01	89.7	9.5143E-01	.2	3.2235E-02	76.5	6.3399E-03	88.5	5.0144E-03	11.0
.299	.278	3.60	2.3592E-01	-110.3	8.0105E-01	89.7	9.4569E-01	.2	3.9393E-02	75.7	7.4931E-03	88.2	6.0941E-03	11.6
.317	.294	3.40	2.8374E-01	-108.9	8.0172E-01	89.7	9.4070E-01	.2	4.5539E-02	75.0	8.4270E-03	87.9	6.9400E-03	11.5
.316	.312	3.20	2.8137E-01	-109.4	7.9994E-01	89.7	9.3473E-01	.2	5.3208E-02	74.4	9.5285E-03	87.6	7.9372E-03	11.5
.325	.333	3.00	2.7877E-1	-109.0	7.9537E-01	89.6	9.2720E-01	.1	6.2943E-02	73.6	1.0838E-02	87.4	9.0941E-03	11.7
.335	.357	2.80	2.7587E-01	-108.7	7.8756E-01	89.6	9.177.E-01	.1	7.5552E-02	72.7	1.2408E-02	87.1	1.8662E-02	12.0
.346	.335	2.60	2.7243E-01	-108.3	7.7956E-01	89.5	9.0573E-01	.1	9.2274E-02	71.8	1.4369E-02	86.8	1.2100E-02	12.5
.359	.417	2.40	2.68.1E-01	-107.9	7.5991E-01	89.4	8.9029E-01	.1	1.1508E-01	70.8	1.6632E-02	86.5	1.4807E-02	13.1
.373	.455	2.20	2.6320E-1	-107.6	7.385.E-01	89.2	8.7618E-01	.2	1.4726E-01	69.8	1.9502E-02	86.1	1.6534E-02	13.9
.301	.501	2.00	2.57.1E-1	-107.4	7.1877E-01	89.0	8.4619E-01	.2	1.9572E-01	68.6	2.3208E-02	85.6	1.9994E-02	14.6
.397	.526	1.90	2.5378E-01	-107.3	7.1062E-01	88.9	8.3304E-01	.1	2.2993E-01	68.1	2.5510E-02	85.3	2.2326E-02	14.9
.417	.556	1.80	2.4959E-01	-107.2	6.9361E-01	85.8	8.1766E-01	.1	2.7340E-01	67.5	2.8124E-02	84.9	2.4962E-02	15.4
.417	.588	1.70	2.4473E-01	-107.1	6.8511E-01	88.7	7.9954E-01	.1	3.2964E-01	66.C	3.1131E-02	84.5	2.7956E-02	15.9
.428	.625	1.60	2.3903E-01	-107.1	6.6701E-01	86.4	7.7649E-01	.1	4.0386E-01	66.4	3.4497E-02	84.0	3.1370E-02	16.5
.446	.607	1.50	2.3230E-1	-107.2	6.4842E-01	88.1	7.5255E-01	.1	5.0418E-01	66.0	3.8377E-02	83.5	3.5282E-02	17.4
.453	.714	1.40	2.2427E-1	-107.2	6.1661E-01	87.7	7.2196E-01	.0	6.4355E-01	65.7	4.2044E-02	82.9	3.9702E-02	18.3
.467	.769	1.3.	2.1601E-01	-107.2	5.8622E-01	87.2	6.8515E-01	-.0	7.4372E-01	65.6	4.7839E-02	82.2	4.6976E-02	19.5
.483	.833	1.2.	2.0292E-01	-107.5	5.5284E-01	86.6	6.4259E-01	-.1	1.1492E+00	65.8	5.3699E-02	81.3	5.1544E-02	21.8
.500	.909	1.10	1.8803E-01	-107.9	5.1777E-01	85.9	5.9359E-01	-.1	1.6433E+00	66.6	6.0546E-02	80.2	5.9876E-02	23.8
.520	1.000	1.00	1.7119E-01	-108.4	4.7579E-01	84.9	5.3370E-01	-.2	2.4602E+00	68.4	6.8477E-02	74.9	6.9309E-02	25.6
.542	1.111	.9.	1.4965E-01	-109.1	4.2853E-01	83.6	4.6069E-01	-.4	4.0294E+00	71.9	7.5910E-02	77.1	7.9660E-02	29.4
.568	1.250	.80	1.2335E-01	-110.3	3.8044E-01	82.3	3.7247E-01	-.6	7.2624E+00	78.7	8.3671E-02	74.8	8.9900E-02	35.5
.598	1.429	.70	9.2027E-02	-112.2	3.3766E-01	83.9	2.7347E-01	-.8	1.5160E+01	94.5	8.3245E-02	71.6	9.3910E-02	47.7
.633	1.667	.60	5.7681E-02	-115.9	2.2718E-01	99.1	1.6450E-01	-.9	2.9665E+01	133.8	8.6593E-02	66.8	5.4258E-02	73.8
.676	2.000	.50	2.3958E-02	-124.6	1.2109E-02	117.4	6.3063E-02	-.4	1.3103E+01	-160.9	7.0744E-02	59.0	5.6565E-02	45.2
.729	2.500	.40	2.2396E-03	-158.8	1.647.E-02	-25.9	4.4572E-03	10.0	1.6996E+00	-87.6	3.5653E-02	42.6	5.7133E-03	24.0
.797	3.333	.3.	2.6269E-03	152.3	1.6419E-03	-18.9	7.1605E-03	161.7	1.3769E+00	3.4	4.5427E-03	-35.6	2.2890E-04	-163.2
.88.	5.001	.20	4.5320E-4	-66.9	4.9961E-03	131.8	1.3665E-04	-22.3	7.6471E-02	144.0	4.4724E-03	-170.7	8.4817E-04	-32.9
.952	...	.10	8.0307E-05	-132.7	4.6208E-04	-134.9	6.3452E-05	-59.7	3.9289E-02	-1.6 1	5.2720E-04	79.2	5.2730E-04	39.5

17

TABLE 8 – DLG-26, RESPONSE AMPLITUDE OPERATORS, 60 DEGREES, 20 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DLG-26 LAMPS CONFIGURATION (DRAFT=19.1FT)   •••

HEADING = 60. DEG   SHIP SPEED = 19.99 KNOTS   WAVE SLOPE (360*R/LAMBDA), K*R, = 2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .2600   WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.255	.238	4.20	4.1426E-01	-111.3	1.0337E+00	89.1	9.4434E-01	.1	2.5163E-02	71.7	4.3718E-03	82.7	3.6265E-03	19.5
.263	.256	3.91	4.1616E-01	-110.6	1.0325E+00	89.1	9.3662E-01	.1	2.9806E-02	70.8	5.0057E-03	82.9	4.2459E-03	19.8
.271	.278	3.60	4.1864E-01	-109.9	1.0292E+00	89.0	9.2681E-01	.1	3.5855E-02	69.8	5.9635E-03	83.1	5.0286E-03	20.1
.277	.294	3.40	4.2064E-01	-109.5	1.0255E+00	88.9	9.1876E-01	.1	4.0964E-02	69.0	6.6648E-03	83.2	5.6730E-03	20.4
.284	.312	3.20	4.2291E-01	-109.0	1.0205E+00	88.9	9.0917E-01	.1	4.7237E-02	68.2	7.4820E-03	83.3	6.4471E-03	20.7
.291	.333	3.00	4.2563E-01	-108.6	1.0213E+00	88.8	8.9948E-01	.1	5.5156E-02	67.3	8.5240E-03	83.2	7.6156E-03	20.6
.299	.357	2.80	4.2876E-01	-108.2	1.0262E+00	88.7	8.8937E-01	.0	6.5333E-02	66.4	9.8482E-03	82.9	9.2637E-03	19.9
.307	.385	2.60	4.3211E-01	-107.8	1.0278E+00	88.6	8.7681E-01	-.0	7.8547E-02	65.3	1.1449E-02	82.6	1.1304E-02	19.5
.317	.417	2.40	4.3560E-01	-107.4	1.0252E+00	88.5	8.6135E-01	-.1	9.6090E-02	64.1	1.3402E-02	82.3	1.3868E-02	19.3
.327	.455	2.20	4.3955E-01	-107.1	1.0171E+00	88.3	8.4694E-01	-.1	1.1999E-01	62.8	1.5809E-02	81.9	1.7152E-02	19.4
.338	.500	2.00	4.4213E-01	-105.8	1.0018E+00	88.0	8.1501E-01	-.2	1.5354E-01	61.4	1.8805E-02	81.4	2.1446E-02	19.5
.344	.526	1.90	4.4337E-01	-106.6	9.9067E-01	87.8	7.9919E-01	-.3	1.7554E-01	60.6	2.0579E-02	81.1	2.4103E-02	19.7
.351	.556	1.80	4.4425E-01	-106.5	9.7673E-01	87.5	7.8102E-01	-.4	2.0230E-01	59.8	2.2571E-02	80.8	2.7197E-02	19.9
.357	.588	1.70	4.4461E-01	-106.4	9.5945E-01	87.2	7.6104E-01	-.5	2.3520E-01	59.0	2.4813E-02	80.4	3.0822E-02	20.2
.365	.625	1.60	4.4422E-01	-106.3	9.3820E-01	86.9	7.3572E-01	-.5	2.7608E-01	58.2	2.7338E-02	79.9	3.5101E-02	20.5
.372	.667	1.50	4.4277E-01	-106.3	9.1217E-01	86.5	6.9742E-01	-.7	3.2746E-01	57.3	3.0180E-02	79.4	4.0185E-02	20.8
.380	.714	1.40	4.3980E-01	-106.3	8.8490E-01	85.9	6.7435E-01	-.8	3.9281E-01	56.5	3.3373E-02	78.7	4.6266E-02	21.6
.389	.769	1.30	4.3482E-01	-106.3	8.4835E-01	85.3	6.3638E-01	-1.1	4.8301E-01	55.6	3.7244E-02	77.8	5.4737E-02	21.2
.398	.833	1.20	4.2678E-01	-106.4	8.0730E-01	84.4	5.9617E-01	-1.4	5.9406E-01	54.8	4.1611E-02	76.7	6.5129E-02	22.1
.409	.909	1.10	4.1428E-01	-106.4	7.5404E-01	83.3	5.4590E-01	-1.7	7.4661E-01	54.1	4.6395E-02	75.3	7.7630E-02	22.7
.419	1.000	1.00	3.9537E-01	-106.7	6.8612E-01	81.7	4.8602E-01	-2.2	9.4712E-01	53.6	5.1443E-02	73.7	9.2525E-02	23.6
.430	1.111	.90	3.6720E-01	-107.6	6.0110E-01	79.4	4.1503E-01	-2.9	1.2176E+00	53.4	5.6378E-02	71.5	1.0900E-01	24.7
.441	1.250	.80	3.2558E-01	-108.5	4.9738E-01	75.9	3.3208E-01	-4.0	1.5290E+00	53.6	6.3364E-02	68.5	1.2853E-01	26.1
.453	1.429	.70	2.6664E-01	-109.6	3.7642E-01	72.2	2.4831E-01	-5.5	1.8666E+00	54.8	6.1645E-02	64.5	1.4593E-01	28.1
.465	1.667	.60	1.8609E-01	-113.2	2.4759E-01	60.1	1.3976E-01	-7.9	2.0491E+00	57.6	5.7851E-02	58.5	1.5092E-01	30.8
.474	2.000	.50	9.0483E-02	-120.9	1.3573E-01	39.7	5.2337E-02	-12.4	1.6754E+00	64.9	4.4291E-02	48.8	1.2550E-01	34.9
.459	2.500	.40	1.7820E-02	-155.5	7.5768E-02	.7	3.8475E-03	-24.3	5.8155E-01	93.7	2.0679E-02	29.9	9.9608E-02	43.3
.377	3.333	.30	2.4068E-02	110.9	2.6961E-02	-46.5	3.8461E-03	152.5	7.5378E-01	-164.8	2.0506E-03	-45.7	5.5098E-02	-162.6
.205	5.000	.20	6.9817E-02	-72.4	4.8695E-02	140.2	5.3214E-04	3.4	7.7797E-02	-165.4	1.0611E-03	161.3	5.0592E-03	-91.4
.060	10.000	.10	2.6239E+00	-91.1	9.6668E+00	21.1	1.9033E-04	-10.6	1.2905E-02	18.4	4.1575E-05	-130.3	2.6231E-01	74.9

TABLE 9 — DLG-26, RESPONSE AMPLITUDE OPERATORS, 90 DEGREES, 10 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DLG-26 LAMPS CONFIGURATION (DRAFT=19.1FT)   ***

HEADING = 90. DEG		SHIP SPEED = 9.99 KNOTS	WAVE SLOPE (360*R/LAMBDA), K*R, = 2.25 DEG	
(HEAD SEAS=180)		FROUDE NUMBER = .1300	WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80	

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.303	.238	4.20	1.9831E-02	-169.3	9.3934E-01	89.8	9.9859E-01	.1	3.8975E-02	91.6	3.3357E-05	-76.0	9.4036E-06	48.6
.315	.256	3.90	1.7757E-02	-168.8	9.4114E-01	89.8	9.9981E-01	.1	4.6860E-02	91.9	3.3679E-05	-73.0	1.0816E-05	49.8
.327	.278	3.60	1.5737E-02	-168.2	9.3835E-01	89.8	1.0008E+00	.1	5.7315E-02	92.1	3.4685E-05	-70.2	1.1584E-05	56.1
.337	.294	3.40	1.4437E-02	-167.8	9.3362E-01	89.8	1.0012E+00	.1	6.6307E-02	92.3	3.5872E-05	-68.6	1.3925E-05	63.8
.347	.312	3.20	1.3179E-02	-167.4	9.2033E-01	89.8	1.0013E+00	.1	7.7559E-02	92.5	3.7623E-05	-67.1	1.6376E-05	72.6
.359	.333	3.00	1.1964E-02	-167.0	9.1625E-01	89.6	1.0010E+00	.1	9.1911E-02	92.7	4.0141E-05	-65.7	2.6407E-05	80.6
.371	.357	2.80	1.0793E-02	-166.5	9.6320E-01	89.7	9.9991E-01	.2	1.1064E-01	92.9	4.3740E-05	-64.7	4.0679E-05	67.6
.385	.385	2.60	9.6781E-03	-166.0	8.9291E-01	89.7	9.9922E-01	.2	1.3648E-01	93.2	4.7460E-05	-63.0	5.8064E-05	91.4
.401	.417	2.40	8.6353E-03	-165.0	8.9556E-01	89.8	1.0020E+00	.2	1.7233E-01	93.8	4.3362E-05	-59.2	6.7165E-05	91.6
.419	.455	2.20	7.6305E-03	-164.9	8.9213E-01	89.8	1.0046E+00	.2	2.2530E-01	94.5	5.0685E-05	-55.4	3.1096E-05	93.9
.439	.506	2.00	6.6648E-03	-164.3	8.8223E-01	89.8	1.0064E+00	.2	3.3729E-01	95.4	5.5172E-05	-51.0	1.4337E-04	97.3
.451	.526	1.90	6.1959E-03	-163.9	8.7463E-01	89.8	1.0069E+00	.0	3.6645E-01	95.9	5.8616E-05	-56.1	1.6883E-05	99.1
.463	.556	1.80	5.7391E-03	-163.6	8.6526E-01	89.8	1.0069E+00	.2	4.4888E-01	96.5	6.3265E-05	-48.4	2.5593E-04	100.8
.470	.568	1.70	5.2926E-03	-163.2	8.5494E-01	89.8	1.0065E+00	.2	5.5222E-01	97.3	6.9493E-05	-46.7	3.5387E-04	102.5
.491	.625	1.60	4.8748E-03	-162.6	8.5703E-01	89.9	1.0103E+00	.2	7.0576E-01	98.6	7.2120E-05	-43.4	4.4745E-04	104.8
.507	.667	1.50	4.4646E-03	-162.2	8.5930E-01	90.0	1.0142E+00	.2	9.3593E-01	106.2	7.5611E-05	-40.0	6.1470E-04	106.3
.525	.714	1.40	4.0624E-03	-162.2	8.5930E-01	90.2	1.0181E+00	.3	1.3341E+00	102.4	8.3552E-05	-36.5	9.2158E-04	109.4
.545	.769	1.30	3.6685E-03	-161.9	8.5459E-01	90.4	1.0216E+00	.3	1.9468E+00	105.7	9.3720E-05	-33.0	1.5246E-03	113.4
.567	.833	1.20	3.2830E-03	-161.5	8.5944E-01	90.9	1.0243E+00	.3	3.2105E+00	111.0	1.0952E-04	-29.5	2.8133E-03	113.4
.592	.909	1.10	2.9228E-03	-161.2	8.7399E-01	92.7	1.0334E+00	.3	6.0109E+00	121.4	1.2570E-04	-24.4	5.6671E-03	131.1
.621	1.000	1.00	2.5742E-03	-160.9	8.6148E-01	97.0	1.0446E+00	.4	1.2474E+01	143.8	1.5149E-04	-16.7	1.3283E-02	155.1
.655	1.111	.90	2.2433E-03	-160.7	6.5277E-01	101.7	1.0573E+00	.5	7.6677E+00	-174.6	1.9567E-04	-12.9	1.9173E-02	-161.8
.694	1.250	.80	1.8968E-03	-160.6	4.9943E-01	96.8	1.0779E+00	.7	3.2363E+00	-141.6	2.6489E-04	-5.6	1.0620E-02	-125.0
.742	1.429	.70	1.5779E-03	-160.6	4.6529E-01	92.2	1.1133E+00	1.1	1.5610E+00	-127.0	3.9491E-04	2.7	5.4310E-03	-187.4
.802	1.667	.60	1.2762E-03	-160.9	3.8011E-01	89.9	1.1687E+00	1.7	8.1504E-01	-121.4	6.8453E-04	13.2	3.2097E-03	-95.6
.878	2.000	.50	9.8715E-04	-161.6	3.0697E-01	87.7	1.2624E+00	3.3	4.3979E-01	-120.5	1.4427E-03	27.2	2.2352E-03	-85.9
.982	2.500	.40	7.1335E-04	-162.7	2.1075E-01	84.8	1.3937E+00	5.9	2.2862E-01	-123.3	3.9822E-03	51.0	1.7551E-03	-75.1
1.135	3.333	.30	4.1200E-04	-164.1	8.5595E-02	79.4	1.1169E+00	14.0	9.5663E-02	-131.0	1.6363E-02	104.7	1.5462E-03	-62.7
1.385	5.000	.20	1.7941E-04	-178.5	5.5595E-02	65.7	1.8941E-01	35.6	9.5663E-02	-147.9	4.1270E-03	162.2	1.3840E-03	-50.5
1.960	10.000	.10	2.4394E-05	145.9	8.0292E-03	3.5	5.9251E-03	49.6	1.3083E-02	156.2	2.6537E-04	160.0	7.8117E-04	-61.2

TABLE 10 - DLG-26, RESPONSE AMPLITUDE OPERATORS, 90 DEGREES, 20 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DLG-26 LAMPS CONFIGURATION (DRAFT=19.1FT)   ***

HEADING = 90. DEG   SHIP SPEED = 19.99 KNOTS   WAVE SLOPE (360*R/LAMBDA), K*R, = 2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .2690   WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.303	.238	4.20	1.9918E-02	-169.3	9.3390E-01	89.4	9.9323E-01	-.1	3.8814E-02	90.9	1.3152E-04	-50.1	2.1719E-05	34.3
.315	.256	3.90	1.7794E-02	-168.8	9.3564E-01	89.5	9.9462E-01	-.1	4.6665E-02	91.2	1.8774E-04	-47.7	2.7287E-05	33.9
.327	.278	3.61	1.5763E-02	-168.3	9.3329E-01	89.5	9.9572E-01	-.1	5.7108E-02	91.5	1.9606E-04	-45.7	2.3622E-05	39.2
.337	.294	3.40	1.4602E-02	-157.9	3.2911E-01	89.5	9.9618E-01	-.1	6.6115E-02	91.7	2.0318E-04	-44.6	2.3951E-05	46.2
.347	.312	3.20	1.3203E-02	-167.5	9.2259E-01	89.5	9.9631E-01	-.1	7.7403E-02	91.9	2.1204E-04	-43.7	2.5589E-05	56.0
.359	.333	3.03	1.1988E-02	-167.4	9.1348E-01	89.4	9.9596E-01	-.1	9.1346E-02	92.0	2.2329E-04	-43.1	3.0327E-05	67.8
.371	.357	2.80	1.0816E-02	-166.5	9.0151E-01	89.3	9.9490E-01	-.1	1.1473E-01	92.2	2.3795E-04	-42.8	4.0907E-05	79.6
.385	.385	2.60	9.7034E-03	-166.6	8.9222E-01	89.4	9.9428E-01	-.1	1.3629E-01	92.5	2.5367E-04	-42.1	5.6023E-05	86.6
.401	.417	2.40	8.6573E-03	-165.5	8.9452E-01	89.5	9.9738E-01	-.1	1.7258E-01	93.2	2.6229E-04	-39.2	6.5343E-05	86.0
.419	.455	2.20	7.0522E-03	-164.9	8.9104E-01	89.5	1.0022E+00	-.1	2.2577E-01	93.9	2.7531E-04	-36.5	6.7309E-05	80.3
.439	.500	2.00	6.6207E-03	-164.3	8.8243E-01	89.4	1.0025E+00	-.1	3.0341E-01	94.8	2.9490E-04	-34.1	1.3551E-04	94.7
.451	.526	1.90	6.2174E-03	-164.0	8.7555E-01	89.4	1.0032E+00	-.1	3.6423E-01	95.3	3.0831E-04	-33.1	1.7810E-04	97.6
.463	.556	1.70	5.7592E-03	-163.7	8.6730E-01	89.4	1.0034E+07	-.1	4.4771E-01	95.9	3.2516E-04	-32.3	2.4189E-04	100.4
.476	.588	1.70	5.3123E-03	-163.3	8.5763E-01	89.3	1.0068E+00	-.1	5.5668E-01	96.6	3.4569E-04	-31.5	3.3633E-04	102.8
.491	.625	1.60	4.8942E-03	-163.0	8.6041E-01	89.4	1.0074E+00	-.1	7.1156E-01	97.9	3.5698E-04	-29.1	4.2740E-04	104.1
.507	.667	1.50	4.4837E-03	-162.7	8.6171E-01	89.5	1.0117E+00	-.2	9.4454E-01	99.6	3.7260E-04	-26.7	5.8948E-04	106.4
.525	.714	1.40	4.0811E-03	-162.3	8.6247E-01	89.5	1.0160E+00	-.2	1.3186E+00	101.9	3.9416E-04	-24.4	8.0805E-04	109.7
.545	.769	1.30	3.6807E-03	-162.0	8.6447E-01	89.7	1.0200E+00	-.2	1.3738E+00	105.2	4.2409E-04	-22.1	1.4755E-03	116.0
.567	.833	1.20	3.3008E-03	-161.6	8.7194E-01	93.1	1.0235E+00	.3	3.2565E+00	110.6	4.6630E-04	-20.0	2.7554E-03	120.1
.592	.909	1.10	2.9401E-03	-161.3	9.0173E-01	91.7	1.0332E+00	.4	5.1172E+01	121.4	5.7359E-04	-16.4	5.5634E-03	131.9
.621	1.000	1.00	2.5858E-03	-161.0	9.1043E-01	96.2	1.0452E+03	.5	1.2495E+01	144.3	5.5734E-04	-12.3	1.7709E-02	156.2
.655	1.111	.90	2.2332E-03	-160.7	7.6747E-01	102.0	1.0586E+00	.5	1.5353E+01	-174.6	6.4313E-04	-8.2	1.8023E-02	-161.5
.694	1.250	.80	1.9116E-03	-160.6	5.2580E-01	99.3	1.6017E+00	1.2	7.4329E+00	-142.7	7.5449E-04	-2.5	1.0012E-02	-127.1
.742	1.429	.70	1.5911E-03	-160.9	4.7344E-01	93.8	1.1153E+00	1.9	3.2696E+00	-128.5	9.4175E-04	4.4	5.2041E-03	-109.6
.802	1.667	.60	1.2869E-03	-160.9	4.3182E-01	91.2	1.1689E+00	3.3	1.5723E+00	-123.1	1.2673E-03	13.5	3.1803E-03	-98.7
.878	2.000	.50	9.9355E-04	-161.6	3.7063E-01	88.8	1.2560E+00	6.3	8.3655E-01	-122.2	1.9625E-03	25.9	2.1236E-03	-89.9
.982	2.500	.40	7.1419E-04	-162.9	3.0123E-01	87.8	1.3718E+00	14.3	4.6213E-01	-126.8	3.7454E-03	46.2	1.6148C-03	-80.0
1.139	3.333	.30	4.2507E-04	-164.0	2.6427E-01	8.1	1.1239E+00	35.8	2.0286E-01	-131.7	7.7776E-03	87.1	1.3501E-03	-50.8
1.389	5.000	.20	1.8466E-04	-176.9	3.1417E-02	65.8	1.7569E-01	50.5	1.0270E-01	-147.3	4.0625E-03	144.5	1.1623E-03	-58.2
1.3641	6.000	.10	2.4265E-05	146.1	7.8417E-03	2.2	6.7716E-03	.6	1.3186E-02	157.3	2.8561E-04	156.3	7.7766E-04	-67.1

TABLE 11 - DLG-26, RESPONSE AMPLITUDE OPERATORS, 120 DEGREES, 10 KNOTS

***

SHIP MOTIONS IN REGULAR WAVES ***   DLG-26 LAMPS CONFIGURATION (DRAFT=19.1FT)

HEADING = 120. DEG   SHIP SPEED = 9.99 KNOTS   WAVE SLOPE (360*R/LAMBDA), K*R. = 2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .1300   WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE ODS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.327	.238	4.20	1.1054E-01	103.5	6.1533E-01	89.3	9.8696E-01	.1	3.7820E-02	107.4	7.5553E-03	-85.2	2.7361E-03	-176.6
.340	.256	3.90	1.0698E-01	102.1	6.2201E-01	85.9	9.8752E-01	.1	4.7158E-02	109.1	8.6610E-03	-84.8	3.2781E-03	-176.2
.355	.278	3.60	1.0328E-01	100.6	6.2312E-01	90.0	9.8754E-01	.0	6.0232E-02	111.0	1.0061E-02	-84.5	3.9827E-03	-176.6
.367	.294	3.40	1.0071E-01	99.5	6.2031E-01	90.0	9.8709E-01	.0	7.2075E-02	112.3	1.1213E-02	-84.2	4.5652E-03	-177.1
.379	.312	3.20	9.8045E-02	98.4	6.1430E-01	90.0	9.8605E-01	-.0	8.7630E-02	113.6	1.2592E-02	-83.9	5.2593E-03	-178.0
.392	.333	3.00	9.5248E-02	97.2	6.0444E-01	90.0	9.8420E-01	-.0	1.0861E-01	115.1	1.4264E-02	-83.6	6.0903E-03	-179.1
.407	.357	2.80	9.2292E-02	96.0	5.9154E-01	90.0	9.8117E-01	-.1	1.3784E-01	116.7	1.6314E-02	-83.2	7.0924E-03	179.6
.424	.385	2.60	8.9136E-02	94.6	5.7406E-01	90.0	9.7643E-01	-.1	1.8023E-01	118.5	1.8864E-02	-82.8	8.3149E-03	178.0
.443	.417	2.40	8.5727E-02	93.2	5.5215E-01	90.0	9.6926E-01	-.1	2.4502E-01	120.7	2.2079E-02	-82.3	9.8339E-03	176.2
.465	.455	2.20	8.1995E-02	91.6	5.2547E-01	90.1	9.5844E-01	-.1	3.5106E-01	123.2	2.6200E-02	-81.6	1.1778E-02	174.1
.490	.500	2.00	7.7845E-02	89.9	4.9391E-01	90.3	9.4224E-01	-.1	5.4202E-01	125.6	3.1562E-02	-80.8	1.4396E-02	171.7
.504	.526	1.90	7.5573E-02	88.9	4.7635E-01	90.5	9.3131E-01	-.1	7.0037E-01	128.7	3.4852E-02	-80.2	1.6112E-02	170.5
.519	.556	1.80	7.3143E-02	87.9	4.5765E-01	90.9	9.1791E-01	-.2	9.3762E-01	131.3	3.8644E-02	-79.6	1.8264E-02	169.2
.536	.588	1.70	7.0529E-02	86.9	4.3793E-01	91.5	9.0145E-01	-.2	1.3144E+00	134.7	4.3023E-02	-78.9	2.1100E-02	168.0
.554	.625	1.60	6.7804E-02	85.7	4.3016E-01	92.9	8.9291E-01	-.3	1.9592E+00	140.8	4.8317E-02	-78.2	2.5751E-02	169.0
.575	.667	1.50	6.4825E-02	84.6	4.1784E-01	95.0	8.8323E-01	-.4	3.1640E+00	149.4	5.4678E-02	-77.4	3.2989E-02	170.8
.597	.714	1.40	6.1540E-02	83.5	3.9149E-01	98.3	8.7134E-01	-.5	5.5701E+00	162.7	6.2375E-02	-76.3	4.4613E-02	178.8
.623	.769	1.30	5.7896E-02	82.2	3.2660E-01	103.3	8.5669E-01	-.7	9.9107E+00	-175.2	7.1762E-02	-75.1	5.8898E-02	-176.8
.651	.833	1.20	5.3825E-02	80.7	2.0943E-01	105.1	8.3868E-01	-.9	1.2747E+01	-142.5	8.3284E-02	-73.5	5.7951E-02	-161.3
.684	.909	1.10	4.9247E-02	79.0	1.4442E-01	96.2	9.1665E-01	-1.3	9.1572E+00	-112.1	9.7457E-02	-71.6	3.6880E-02	-154.1
.722	1.000	1.00	4.4064E-02	77.0	1.2835E-01	88.7	7.8997E-01	-1.8	5.2526E+00	-93.5	1.1477E-01	-69.0	2.4321E-02	-160.1
.767	1.111	.90	3.8171E-02	74.8	1.1021E-01	85.3	7.5792E-01	-2.3	3.1025E+00	-83.3	1.3534E-01	-65.7	2.0321E-02	-170.7
.821	1.250	.80	3.1320E-02	72.5	8.6530E-02	84.6	7.4198E-01	-2.7	1.8809E+00	-75.9	1.6321E-01	-60.7	1.9525E-02	-179.0
.887	1.429	.70	2.3601E-02	69.7	5.7133E-02	83.3	7.4553E-01	-1.9	1.2006E+00	-70.6	1.9514E-01	-53.0	1.9985E-02	173.6
.971	1.667	.60	1.5218E-02	66.0	2.6107E-02	79.7	7.5489E-01	3.2	7.9359E-01	-67.6	2.1672E-01	-40.5	2.0205E-02	164.9
1.091	2.000	.50	6.8752E-03	60.0	4.7212E-03	74.9	5.8301E-01	22.4	4.1329E-01	-68.0	1.7590E-01	-17.9	1.6348E-02	156.0
1.235	2.500	.40	1.4522E-03	44.0	6.0633E-04	-89.7	7.0846E-02	49.7	1.2560E-01	-76.0	4.9560E-02	11.3	8.5942E-03	142.5
1.471	3.333	.30	6.9000E-05	-54.8	3.9709E-03	-116.8	1.3726E-02	-36.0	1.3667E-02	-149.9	1.7159E-04	-2.4	8.4546E-04	89.5
1.495	5.000	.20	1.5146E-05	178.7	2.6006E-04	125.0	5.6258E-04	-87.6	3.9333E-03	111.8	2.3007E-04	-118.0	2.9922E-04	-67.0
2.976	10.000	.10	7.1345E-09	-134.5	7.0729E-06	42.4	1.6820E-06	65.4	8.5908E-05	.8	1.0001E-05	-103.9	6.5322E-06	-176.7

21

TABLE 12 - DLG-26, RESPONSE AMPLITUDE OPERATORS, 120 DEGREES, 20 KNOTS

***

SHIP MOTIONS IN REGULAR WAVES ***   DLG-26 LAMPS CONFIGURATION (DRAFT=19.1FT)

HEADING = 120. DEG   SHIP SPEED = 19.99 KNOTS   WAVE SLOPE (360*R/LAMBDA), K*H, = 2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .2600   WAVE STEEPNESS (2*H/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.351	.238	4.20	5.3070E-02	103.6	5.3272E-01	87.4	1.0052E+00	.0	4.6370E-02	112.3	7.8428E-03	-18.7	1.4627E-03	-168.2
.366	.256	3.90	7.3646E-02	102.2	5.3461E-01	89.9	1.0046E+00	-.0	5.9712E-02	111.0	8.9111E-03	-78.4	1.8592E-03	-169.5
.384	.278	3.50	7.6104E-02	100.7	5.3071E-01	89.9	1.0115E+00	-.0	7.112E-02	115.8	1.0275E-02	-78.1	2.3637E-03	-171.4
.394	.294	3.40	7.3658E-02	99.6	5.2314E-01	89.9	1.0132E+00	-.0	9.4442E-02	117.1	1.1406E-02	-77.9	2.7924E-03	-172.9
.410	.312	3.20	7.1128E-02	98.4	5.1347E-01	89.9	1.0145E+00	-.1	1.1770E-01	118.5	1.2771E-02	-77.7	3.3157E-03	-174.7
.426	.333	3.00	6.8496E-02	97.2	5.0111E-01	89.9	1.0153E+00	-.1	1.5036E-01	120.0	1.4438E-02	-77.5	3.9593E-03	-176.7
.443	.357	2.80	6.5740E-02	96.0	4.8522E-01	89.9	1.0152E+00	-.1	1.9823E-01	121.8	1.6500E-02	-77.1	4.7615E-03	-178.9
.463	.385	2.60	6.2831E-02	94.6	4.6744E-01	89.9	1.0139E+00	-.1	2.7241E-01	123.9	1.9088E-02	-76.7	5.7838E-03	178.7
.475	.417	2.40	5.9735E-02	93.1	4.4697E-01	90.0	1.0106E+00	-.1	3.9625E-01	126.6	2.2381E-02	-76.1	7.1384E-03	176.1
.511	.455	2.20	5.6406E-02	91.6	4.2370E-01	90.3	1.0044E+00	-.1	6.2572E-01	130.3	2.6633E-02	-75.4	9.0612E-03	173.4
.540	.500	2.00	5.2802E-02	89.8	4.0156E-01	91.2	9.9591E-01	-.2	1.1199E+00	136.4	3.2158E-02	-74.4	1.2178E-02	171.3
.557	.526	1.90	5.0928E-02	89.0	4.0026E-01	92.6	9.9957E-01	-.2	1.6005E+00	142.5	3.5432E-02	-73.8	1.4864E-02	172.5
.575	.556	1.80	4.8941E-02	88.1	3.4624E-01	94.5	1.0038E+00	-.2	2.4340E+00	150.7	3.9287E-02	-73.1	1.8943E-02	174.5
.595	.588	1.70	4.6826E-02	87.2	3.8402E-01	97.3	1.0048E+00	-.2	3.9363E+00	162.7	4.3863E-02	-72.3	2.5187E-02	178.4
.618	.625	1.60	4.4568E-02	86.1	3.4727E-01	101.5	1.0147E+00	-.2	6.4181E+00	-178.7	4.9342E-02	-71.3	3.3395E-02	-173.6
.642	.667	1.50	4.2146E-02	85.0	2.6626E-01	104.9	1.0221E+00	-.2	8.6227E+00	-151.9	5.5957E-02	-70.2	3.7061E-02	-160.6
.657	.714	1.40	3.9536E-02	83.8	1.8454E-01	101.7	1.0314E+00	-.2	7.5261E+00	-123.5	6.4008E-02	-68.7	2.8694E-02	-149.4
.700	.769	1.30	3.6710E-02	82.5	1.5943E-01	95.0	1.0436E+00	-.1	4.9054E+00	-102.6	7.3868E-02	-66.9	1.9108E-02	-140.1
.735	.833	1.20	3.3634E-02	81.0	1.4798E-01	90.5	1.0599E+00	-.0	3.0653E+00	-89.5	8.5977E-02	-64.7	1.4407E-02	-154.3
.776	.909	1.10	3.0259E-02	79.4	1.3484E-01	88.1	1.0844E+00	.3	1.9950E+00	-81.2	1.0098E-01	-61.8	1.2727E-02	-162.7
.824	1.000	1.00	2.6640E-02	77.2	1.1803E-01	87.7	1.1472E+00	1.3	1.3266E+00	-74.5	1.2139E-01	-57.6	1.2368E-02	-169.2
.880	1.111	.90	2.2301E-02	76.2	9.7419E-02	87.0	1.2553E+00	3.4	9.3275E-01	-69.0	1.4716E-01	-51.8	1.2972E-02	-174.6
.947	1.250	.80	1.7885E-02	74.2	7.2894E-02	85.4	1.4269E+00	8.5	6.9523E-01	-64.4	1.7698E-01	-43.3	1.4208E-02	-179.2
1.032	1.429	.70	1.2557E-02	71.8	4.5501E-02	83.0	1.6183E+00	20.5	5.1748E-01	-61.1	2.0010E-01	-29.6	1.5136E-02	172.8
1.139	1.667	.60	7.2136E-03	68.1	2.1352E-02	80.9	1.3818E+00	48.1	3.2221E-01	-58.5	1.7408E-01	-7.5	1.4116E-02	168.1
1.283	2.000	.50	2.9578E-03	59.6	4.7901E-03	72.7	3.5965E-01	87.1	1.6543E-01	-58.1	7.8872E-02	18.7	1.1297E-02	162.1
1.488	2.500	.40	5.7409E-04	39.6	1.1361E-04	-42.4	4.4577E-03	92.8	4.0562E-02	-67.5	1.0976E-01	42.0	4.9917E-03	152.3
1.809	3.333	.30	4.9228E-05	-40.4	1.4836E-03	-109.7	3.5677E-03	-5.2	4.1077E-03	-160.6	3.4501E-04	-27.4	2.8791E-04	102.6
2.401	5.000	.20	1.0484E-05	-178.5	5.6504E-05	111.7	6.7499E-05	-90.9	1.1323E-03	96.9	8.3866E-05	-133.5	7.4173E-05	-50.6
3.998	10.000	.10	1.8876E-08	-154.8	1.0380E-05	4.2	1.1296E-06	63.7	3.9605E-05	7.5	4.6799E-06	-107.9	3.2512E-06	-174.3

22

TABLE 13 - DLG-26, RESPONSE AMPLITUDE OPERATORS, 150 DEGREES, 10 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DLG-26 LAMPS CONFIGURATION (DRAFT=19.1FT)   •••

HEADING = 150. DEG	SHIP SPEED = 9.99 KNOTS	WAVE SLOPE (360*R/LAMBDA), K*R. = 2.25 DEG
(HEAD SEAS=180)	FROUDE NUMBER = .1300	WAVE STEEPNESS (2*H/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.345	.238	4.20	2.5902E-01	94.1	1.7891E-01	89.6	9.4434E-01	.0	1.6867E-02	116.4	2.1079E-02	-83.9	2.5383E-03	-179.0
.359	.256	3.90	2.4924E-01	93.0	1.7699E-01	89.6	9.3714E-01	.0	2.1717E-02	118.3	2.4245E-02	-83.4	3.0020E-03	-179.7
.376	.278	3.60	2.3855E-01	91.9	1.7299E-01	89.6	9.2734E-01	-.0	2.8786E-02	120.2	2.8214E-02	-82.9	3.5677E-03	-179.2
.388	.294	3.40	2.3079E-01	91.1	1.6904E-01	89.6	9.1883E-01	-.1	3.5437E-02	121.6	3.1442E-02	-82.5	4.0128E-03	178.2
.402	.312	3.20	2.2245E-01	90.2	1.6396E-01	89.6	9.0823E-01	-.1	4.4487E-02	123.0	3.5265E-02	-82.	4.5226E-03	177.1
.417	.333	3.00	2.1341E-01	89.3	1.5767E-01	89.6	8.9493E-01	-.2	5.7200E-02	124.5	3.9827E-02	-81.	5.1089E-03	175.8
.434	.357	2.80	2.0353E-01	88.3	1.5011E-01	89.6	8.7810E-01	-.2	7.5778E-02	126.1	4.5313E-02	-80.	5.7880E-03	174.3
.453	.385	2.63	1.9267E-01	87.2	1.4123E-01	89.7	8.5666E-01	-.3	1.0433E-01	127.9	5.1956E-02	-80.1	6.5850E-03	172.6
.474	.417	2.43	1.8062E-01	86.1	1.3102E-01	90.0	8.2912E-01	-.4	1.5123E-01	130.0	6.0405E-02	-79.2	7.5433E-03	170.6
.498	.455	2.20	1.6713E-01	84.8	1.1953E-01	90.4	7.9351E-01	-.6	2.3574E-01	132.6	6.9913E-02	-78.0	8.7508E-03	168.4
.527	.500	2.00	1.5189E-01	83.3	1.0701E-01	91.4	7.4721E-01	-.9	4.1039E-01	136.4	8.1844E-02	-76.5	1.0424E-02	166.0
.543	.526	1.90	1.4354E-01	82.5	1.0164E-01	92.5	7.2172E-01	-1.1	5.7905E-01	139.8	8.8951E-02	-75.7	1.1769E-02	165.5
.560	.556	1.80	1.3468E-01	81.8	9.7666E-02	94.5	6.9772E-01	-1.3	8.7694E-01	145.4	9.7258E-02	-74.7	1.3983E-02	166.2
.579	.588	1.70	1.2518E-01	80.9	9.2357E-02	97.5	6.7039E-01	-1.6	1.6388E+00	153.2	1.0659E-01	-73.6	1.7232E-02	167.6
.601	.625	1.60	1.1499E-01	80.0	8.3754E-02	102.5	6.3930E-01	-2.1	2.5797E+00	165.3	1.1704E-01	-72.4	2.2091E-02	171.2
.624	.667	1.50	1.0405E-01	79.0	6.5268E-02	111.0	6.0405E-01	-2.7	4.7201E+00	-173.8	1.2659E-01	-70.8	2.7704E-02	-179.9
.650	.714	1.40	9.2342E-02	77.9	3.2796E-02	118.0	5.6431E-01	-3.4	6.2352E+00	-141.7	1.4114E-01	-69.0	2.5264E-02	-165.1
.680	.769	1.30	7.9872E-02	76.7	1.4973E-02	105.6	5.1992E-01	-4.5	4.3406E+00	-111.7	1.5427E-01	-66.8	1.4202E-02	-158.6
.713	.833	1.20	6.6707E-02	75.3	1.1912E-02	92.2	4.7096E-01	-5.8	2.3848E+00	-94.4	1.6703E-01	-64.1	8.4125E-03	-166.6
.752	.909	1.10	5.3023E-02	73.7	9.3637E-03	84.3	4.1767E-01	-7.6	1.3278E+00	-86.1	1.7749E-01	-60.8	6.5010E-03	-178.3
.796	1.000	1.00	3.9066E-02	72.1	6.0193E-03	69.3	3.6499E-01	-9.9	4.3447E-01	-81.6	1.8517E-01	-56.0	5.6987E-03	-171.3
.849	1.111	.90	2.5566E-02	70.3	2.7398E-03	43.7	3.1709E-01	-12.4	4.3447E-01	-78.9	1.8694E-01	-49.4	5.0858E-03	163.6
.914	1.250	.80	1.3705E-02	68.1	5.0954E-04	113.3	2.6470E-01	-13.7	2.6501E-01	-79.5	1.6466E-01	-40.0	4.1934E-03	154.9
.993	1.429	.70	4.9502E-03	65.0	5.0300E-04	-143.4	1.7757E-01	-12.0	1.2674E-01	-86.1	1.1830E-01	-25.7	2.8132E-03	141.7
1.094	1.667	.60	5.8378E-04	57.5	1.8484E-03	-127.5	1.1644E-01	-105.1	1.3897E-02	-105.1	3.0012E-02	-1.7	1.0363E-03	124.2
1.229	2.000	.50	6.9546E-05	-104.4	2.1444E-03	-130.9	5.5400E-02	-157.7	1.4433E-02	-157.7	2.0123E-02	24.5	2.1500E-04	57.2
1.420	2.500	.40	1.4826E-04	-130.8	3.8866E-04	-166.7	1.6294E-02	149.9	1.1155E-02	149.9	3.6928E-03	-117.9	4.0229E-04	-23.5
1.718	3.333	.30	2.3713E-05	53.0	1.2234E-04	59.8	7.0448E-04	46.0	5.9991E-04	46.0	3.4095E-06	-63.4	9.6421E-05	-126.5
2.265	5.000	.20	2.3674E-06	104.4	7.1547E-06	128.4	1.3719E-06	131.0	1.2056E-04	131.0	1.6442E-05	-9.8	9.4683E-06	-10.5
3.717	10.000	.10	4.6501E-07	168.1	9.3974E-07	79.4	2.0477E-06	107.8	4.2457E-06	107.8	2.8348E-06	179.0	6.2804E-07	-73.7

23

TABLE 14 - DLG-26, RESPONSE AMPLITUDE OPERATORS, 150 DEGREES, 20 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DLG-26 LAMPS CONFIGURATION (DRAFT=19.1FT)

MEADING = 150. DEG   SHIP SPEED = 19.99 KNOTS   WAVE SLOPE (360*R/LAMBDA), K*H, = 2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .2700   WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / H)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / H)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / H)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / H)**2 AMPL. RATIO SQUARED	PHASE DEG
.387	.238	4.20	1.6415E-01	74.0	1.4208E-01	89.5	9.8070E-01	-.1	2.5196E-02	122.1	2.1341E-02	-78.7	1.4783E-03	-174.2
.404	.256	3.90	1.5844E-01	93.0	1.3791E-01	89.7	9.7770E-01	-.2	1.3922E-02	124.4	2.4944E-02	-78.2	1.7914E-03	-176.2
.425	.278	3.60	1.4637E-01	91.8	1.3231E-01	89.5	9.283E-01	-.2	4.2714E-02	126.2	2.8602E-02	-77.6	2.1815E-03	-178.6
.440	.294	3.40	1.4068E-01	91.0	1.2774E-01	89.5	9.6014E-01	-.3	6.0439E-02	127.5	3.1930E-02	-77.1	2.4966E-03	179.9
.457	.312	3.20	1.3403E-01	90.1	1.2250E-01	89.5	9.6018E-01	-.3	7.3450E-02	129.0	3.5497E-02	-76.8	2.8697E-03	178.0
.475	.333	3.00	1.2699E-01	89.2	1.1662E-01	89.5	9.535E-01	-.4	1.0974E-01	133.0	4.0652E-02	-75.0	3.??6E-03	176.0
.496	.357	2.80	1.1949E-01	88.2	1.1017E-01	89.8	9.2461E-01	-.5	1.5912E-01	136.1	4.6406E-02	-73.9	3.8917E-03	173.8
.520	.385	2.60	1.1145E-01	87.1	1.0331E-01	90.3	9.2804E-01	-.6	2.4411E-01	142.1	5.3376E-02	-72.7	4.6625E-03	171.5
.547	.417	2.40	1.0284E-01	86.0	9.8280E-02	91.8	9.1397E-01	-.8	4.3986E-01	154.4	6.1497E-02	-71.1	5.945E-03	170.6
.578	.455	2.20	9.3543E-02	84.8	9.5643E-02	95.6	9.0653E-01	-1.0	9.4435E-01	179.8	7.2842E-02	-69.1	8.6389E-03	172.1
.614	.500	2.00	8.3460E-02	83.5	8.3941E-02	103.9	8.3825E-01	-1.2	2.5142E+00	-156.9	4.6534E-02	-67.8	1.6033E-02	-177.4
.635	.526	1.90	7.8037E-02	82.8	6.4022E-02	110.1	9.4403E-01	-1.6	3.7537E+00	-124.6	9.4903E-02	-66.4	1.6056E-02	-165.8
.658	.556	1.80	7.2352E-02	82.0	3.4687E-02	110.2	8.9003E-01	-1.7	3.9000E+00	-105.5	1.0441E-01	-64.7	1.3121E-02	-152.9
.683	.588	1.70	6.6391E-02	81.2	2.7259E-02	100.6	8.8653E-01	-1.9	2.7071E+00	-90.8	1.1516E-01	-62.7	8.2156E-03	-168.5
.710	.625	1.60	6.0143E-02	80.3	2.4977E-02	92.5	8.8388E-01	-1.9	1.6909E+00	-82.0	1.2730E-01	-60.3	5.4873E-03	-153.6
.741	.667	1.50	5.3604E-02	79.4	2.3528E-02	84.5	8.8235E-01	-1.9	1.0822E+00	-76.6	1.4072E-01	-57.1	4.4193E-03	-162.5
.775	.714	1.40	4.6758E-02	78.4	2.0983E-02	86.7	8.8837E-01	-1.8	7.2461E-01	-71.7	1.5553E-01	-51.4	4.0553E-03	-171.2
.814	.769	1.30	3.9577E-02	77.5	1.7836E-02	84.8	9.0721E-01	-1.4	4.9298E-01	-68.0	1.7411E-01	-44.8	3.9761E-03	-177.2
.859	.833	1.20	3.2205E-02	76.5	1.4015E-02	86.8	9.4863E-01	-.0	3.4915E-01	-65.3	1.9398E-01	-41.7	4.0321E-03	177.6
.911	.909	1.10	2.4779E-02	75.5	9.8251E-03	86.4	1.0094E+00	3.0	2.5570E-01	-63.9	2.1276E-01	-32.4	4.1188E-03	172.7
.972	1.000	1.00	1.7521E-02	74.3	5.6486E-03	85.4	1.0681E+00	9.6	1.9205E-01	-63.8	2.2403E-01	-18.7	4.1454E-03	166.8
1.044	1.111	.90	1.0691E-02	73.0	2.3030E-03	86.1	1.0524E+00	23.1	1.3042E-01	-64.3	2.1464E-01	1.?	3.7564E-03	161.6
1.133	1.250	.80	5.0853E-03	70.6	4.3654E-04	90.9	7.2427E-01	48.3	7.3573E-02	-69.7	1.5911E-01	25.2	2.9364E-03	157.0
1.243	1.429	.70	1.5929E-03	65.1	4.5387E-05	-122.7	1.6738E-01	60.3	3.4176E-02	-91.0	6.9084E-02	53.0	1.9219E-03	149.6
1.386	1.667	.60	1.5592E-04	49.0	6.0408E-04	-110.8	8.9439E-04	22.5	8.9074E-03	-156.8	1.0189E-02	-94.3	6.5861E-04	136.8
1.579	2.000	.50	3.2734E-05	-90.1	7.2722E-04	-117.4	1.2022E-02	-16.1	2.9595E-03	149.8	7.5655E-05	-81.6	7.4965E-05	79.3
1.853	2.500	.40	3.3901E-05	-127.6	9.4803E-05	-147.2	1.9305E-03	-18.1	2.3637E-03	11.5	9.1044E-04	149.8	1.0586E-04	-14.8
2.303	3.333	.30	3.4016E-06	48.4	2.9084E-05	4A.4	7.6056E-05	-157.2	1.3885E-04	113.8	3.0342E-05	-142.9	7.6747E-06	-168.5
3.142	5.000	.20	1.3135E-06	152.9	7.9926E-06	114.7	7.5327E-06	-41.1	6.1345E-05	105.1	2.0295E-06	77.4	4.9873E-06	-53.2
5.470	10.000	.10	1.9866E-07	155.4	7.5388E-07	73.9	9.9708E-07	-28.7	2.7754E-06		9.1711E-07	163.1	1.6049E-07	-90.5

24

TABLE 15 - DLG-26, RESPONSE AMPLITUDE OPERATORS, 180 DEGREES, 10 KNOTS

SHIP MOTIONS IN REGULAR WAVES   ***   DLG-26 LAMPS CONFIGURATION (DRAFT=19.1FT)   •••

HEADING = 180. DEG   SHIP SPEED) = 9.99 KNOTS   WAVE SLOPE (360*R/LAMBDA), K*N, = 2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .1300   WAVE STEEPNESS (2**R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.351	.234 4.23	3.1570E-01	92.2	0.	0.0	9.2142E-01	-.0	0.	0.0	2.7716E-02	-83.3	0.	0.0
.366	.256 3.90	3.0227E-01	91.2	0.	0.0	9.1042E-01	-.0	0.	0.0	3.1019E-02	-82.4	0.	0.0
.384	.278 3.60	2.8749E-01	90.2	0.	0.0	8.7632E-01	-.1	0.	0.0	3.6733E-02	-82.2	0.	0.0
.396	.294 3.40	2.7673E-01	89.4	1.	0.0	8.8403E-01	-.1	0.	0.0	4.0465E-02	-81.7	0.	0.0
.410	.312 3.20	2.6511E-01	88.2	0.	0.0	8.6902E-01	-.1	0.	0.0	4.5724E-02	-81.2	0.	0.0
.426	.333 3.00	2.5249E-01	87.2	0.	0.0	8.5055E-01	-.2	0.	0.0	5.1471E-02	-80.5	0.	0.0
.443	.357 2.80	2.3808E-01	86.8	0.	0.0	8.2748E-01	-.3	0.	0.0	5.8303E-02	-79.8	0.	0.0
.463	.385 2.60	2.2353E-01	85.8	0.	0.0	7.9917E-01	-.5	0.	0.0	6.6453E-02	-74.9	0.	0.0
.485	.417 2.40	2.0673E-01	84.6	0.	0.0	7.6343E-01	-.7	0.	0.0	7.6173E-02	-77.8	0.	0.0
.5.1	.455 2.20	1.9802E-01	83.4	0.	0.0	7.1843E-01	-.9	0.	0.0	8.7688E-02	-76.4	0.	0.0
.540	.500 2.00	1.6707E-01	82.0	0.	0.0	6.6302E-01	-1.3	0.	0.0	1.0123E-01	-74.7	0.	0.0
.57	.526 1.90	1.5575E-01	81.3	0.	0.0	6.3604E-01	-1.7	0.	0.0	1.0953E-01	-73.8	0.	0.0
.575	.556 1.80	1.4373E-01	80.6	0.	0.0	6.0541E-01	-2.1	0.	0.0	1.1863E-01	-72.7	0.	0.0
.595	.588 1.70	1.3098E-01	79.7	0.	0.0	5.7205E-01	-2.6	0.	0.0	1.2850E-01	-71.4	0.	0.0
.618	.625 1.60	1.1749E-01	78.8	0.	0.0	5.3452E-01	-3.3	0.	0.0	1.3904E-01	-69.9	0.	0.0
.642	.667 1.50	1.0328E-01	77.9	0.	0.0	4.9310E-01	-4.2	0.	0.0	1.4997E-01	-68.1	0.	0.0
.669	.714 1.40	8.8418E-02	76.8	0.	0.0	4.4748E-01	-5.4	0.	0.0	1.6070E-01	-65.9	0.	0.0
.700	.769 1.30	7.3051E-02	75.5	0.	0.0	3.9921E-01	-7.0	0.	0.0	1.7019E-01	-63.3	0.	0.0
.736	.833 1.20	5.7453E-02	74.3	0.	0.0	3.4769E-01	-9.1	0.	0.0	1.7654E-01	-60.0	0.	0.0
.776	.909 1.13	4.2061E-02	72.8	0.	0.0	2.9451E-01	-11.9	0.	0.0	1.7729E-01	-55.9	0.	0.0
.824	1.000 1.00	2.7481E-02	71.5	0.	0.0	2.4703E-01	-15.4	0.	0.0	1.7282E-01	-50.1	0.	0.0
.880	1.111 .90	1.4979E-02	69.9	0.	0.0	2.0011E-01	-19.0	0.	0.0	1.5337E-01	-42.2	0.	0.0
.947	1.250 .80	5.8129E-03	68.1	0.	0.0	1.4171E-01	-21.9	0.	0.0	1.1122E-01	-30.6	0.	0.0
1.032	1.429 .70	7.6204E-04	65.6	0.	0.0	6.3912E-02	-30.0	0.	0.0	4.8371E-02	-12.6	0.	0.0
1.139	1.667 .60	1.6684E-05	-110.9	0.	0.0	5.1456E-02	-70.9	0.	0.0	2.4228E-03	17.4	0.	0.0
1.283	2.000 .50	2.5497E-04	-124.5	0.	0.0	4.1949E-02	-56.7	0.	0.0	2.6246E-03	-137.3	0.	0.0
1.488	2.500 .40	8.0831E-06	-163.1	0.	0.0	8.2771E-04	-55.6	0.	0.0	2.9251E-03	-101.0	0.	0.0
1.809	3.333 .30	4.1926E-06	-.1	0.	0.0	1.4612E-04	-147.2	0.	0.0	2.4007E-04	118.1	0.	0.0
2.401	5.000 .20	3.5946E-06	61.0	0.	0.0	1.3666E-05	-94.0	0.	0.0	2.9449E-05	-151.9	0.	0.0
3.988	10.000 .10	4.2758E-08	-44.1	0.	0.0	2.5279E-06	-175.0	0.	0.0	1.9938E-06	35.3	0.	0.0

25

TABLE 16 - DLG-26, RESPONSE AMPLITUDE OPERATORS, 180 DEGREES, 20 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DLG-26 LAMPS CONFIGURATION (DRAFT=19.1FT)   •••

HEADING = 180. DEG   SHIP SPEED = 19.99 KNOTS   WAVE SLOPE (360*H/LAMBDA), K*H. = 2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .2600   WAVE STEEPNESS (2*H/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.399	.238	4.20	1.8919E-01	92.2	0.	0.0	9.6467E-01	-.2	0.	0.0	2.7898E-02	-78.2	0.	0.0
.418	.256	3.90	1.7851E-01	91.2	0.	0.0	9.5857E-01	-.3	0.	0.0	3.2118E-02	-77.6	0.	0.0
.440	.278	3.60	1.6752E-01	90.1	0.	0.0	9.4986E-01	-.4	0.	0.0	3.7427E-02	-76.8	0.	0.0
.456	.294	3.40	1.5896E-01	89.3	0.	0.0	9.4209E-01	-.4	0.	0.0	4.1752E-02	-76.2	0.	0.0
.474	.312	3.20	1.5039E-01	88.5	0.	0.0	9.3228E-01	-.5	0.	0.0	4.6863E-02	-75.5	0.	0.0
.494	.333	3.00	1.4131E-01	87.6	0.	0.0	9.1945E-01	-.6	0.	0.0	5.2329E-02	-74.7	0.	0.0
.516	.357	2.80	1.3165E-01	86.6	0.	0.0	9.0407E-01	-.7	0.	0.0	6.0148E-02	-73.6	0.	0.0
.541	.385	2.60	1.2135E-01	85.5	0.	0.0	8.8574E-01	-.9	0.	0.0	6.8766E-02	-72.4	0.	0.0
.570	.417	2.40	1.1039E-01	84.6	0.	0.0	8.7475E-01	-1.1	0.	0.0	7.9504E-02	-70.9	0.	0.0
.603	.455	2.20	9.8573E-02	83.5	0.	0.0	8.6214E-01	-1.5	0.	0.0	9.2485E-02	-69.0	0.	0.0
.642	.500	2.00	8.5794E-02	82.3	0.	0.0	8.4841E-01	-1.9	0.	0.0	1.0960E-01	-66.5	0.	0.0
.664	.526	1.90	7.9024E-02	81.6	0.	0.0	8.4146E-01	-2.1	0.	0.0	1.1941E-01	-65.0	0.	0.0
.688	.556	1.80	7.1993E-02	80.4	0.	0.0	8.3472E-01	-2.3	0.	0.0	1.3027E-01	-63.2	0.	0.0
.714	.588	1.70	6.4705E-02	80.1	0.	0.0	8.2840E-01	-2.5	0.	0.0	1.4212E-01	-61.2	0.	0.0
.744	.625	1.60	5.7375E-02	79.2	0.	0.0	8.2252E-01	-2.6	0.	0.0	1.5478E-01	-58.7	0.	0.0
.777	.667	1.50	4.9413E-02	78.4	0.	0.0	8.1926E-01	-2.5	0.	0.0	1.6835E-01	-55.8	0.	0.0
.814	.714	1.40	4.1403E-02	77.7	0.	0.0	8.3406E-01	-2.2	0.	0.0	1.8485E-01	-51.9	0.	0.0
.856	.769	1.30	3.3354E-02	76.9	0.	0.0	8.6163E-01	-1.0	0.	0.0	2.0144E-01	-47.0	0.	0.0
.904	.833	1.20	2.5430E-02	76.0	0.	0.0	9.0041E-01	1.4	0.	0.0	2.1563E-01	-40.6	0.	0.0
.960	.909	1.10	1.7881E-02	75.1	0.	0.0	9.3337E-01	7.4	0.	0.0	2.2195E-01	-32.1	0.	0.0
1.026	1.000	1.00	1.1016E-02	74.1	0.	0.0	9.0530E-01	18.6	0.	0.0	2.1944E-01	-20.1	0.	0.0
1.104	1.111	.90	5.3903E-03	72.8	0.	0.0	6.8147E-01	39.6	0.	0.0	1.6435E-01	-2.2	0.	0.0
1.200	1.250	.80	1.8062E-03	69.4	0.	0.0	2.2229E-01	69.2	0.	0.0	8.3301E-02	20.2	0.	0.0
1.321	1.429	.70	2.3610E-04	50.8	0.	0.0	4.0166E-03	76.7	0.	0.0	1.8508E-02	46.7	0.	0.0
1.476	1.667	.60	1.5821E-05	-95.2	0.	0.0	1.5738E-02	-27.6	0.	0.0	2.3110E-04	105.2	0.	0.0
1.688	2.000	.50	6.4612E-05	-117.9	0.	0.0	2.2300E-03	-10.5	0.	0.0	1.5157E-03	-88.9	0.	0.0
1.944	2.500	.40	2.7266E-06	-179.8	0.	0.0	1.9574E-04	-56.2	0.	0.0	3.2358E-04	-84.4	0.	0.0
2.483	3.333	.30	3.8320E-06	-9.9	0.	0.0	5.9053E-05	158.9	0.	0.0	1.2680E-05	135.4	0.	0.0
3.413	5.000	.20	1.0892E-06	63.2	0.	0.0	1.4585E-07	-140.7	0.	0.0	1.3116E-06	-119.5	0.	0.0
6.012	10.000	.10	5.6739E-08	-32.1	0.	0.0	6.75H1E-07	174.2	0.	0.0	7.4626E-07	23.4	0.	0.0

TABLE 17 - DE-1073, RESPONSE AMPLITUDE OPERATORS, 0 DEGREES, 10 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DE 1078 (DRAFT=15.5FT)

HEADING = 0. DEG   SHIP SPEED = 10.00 KNOTS   WAVE SLOPE (360*H/LAMBDA), K*R. = 2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .1462   WAVE STEEPNESS (2*H/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.280	.238	4.25	6.4034E-01	-47.2	9.5353E-15	-92.3	8.6128E-01	.5	5.6277E-16	-126.1	3.2054E-02	84.2	3.7629E-16	-165.0
.288	.256	3.90	5.6449E-01	-51.4	9.4786E-15	-92.2	8.4341E-01	.5	6.5362E-16	-127.3	3.6760E-02	83.7	4.4472E-16	-164.9
.297	.278	3.60	4.9692E-01	-56.4	9.3635E-15	-92.4	8.2123E-01	.5	8.1450E-16	-128.6	4.2443E-02	83.2	5.2896E-16	-164.7
.303	.294	3.40	4.5699E-01	-60.3	9.2463E-15	-92.6	8.0360E-01	.5	9.5411E-16	-129.6	4.6893E-02	82.7	5.9633E-16	-164.4
.310	.312	3.20	4.2164E-01	-64.6	9.0895E-15	-92.8	7.8243E-01	.5	1.1291E-15	-130.5	5.1972E-02	82.3	6.7493E-16	-164.1
.318	.333	3.00	3.9141E-01	-69.6	8.8450E-15	-93.1	7.5774E-01	.5	1.3510E-15	-131.4	5.7775E-02	81.8	7.6719E-16	-163.7
.326	.357	2.80	3.6675E-01	-75.1	8.6229E-15	-93.5	7.2843E-01	.6	1.6359E-15	-132.3	6.4403E-02	81.2	8.7615E-16	-163.3
.334	.385	2.60	3.4421E-01	-81.3	8.2903E-15	-94.0	6.9341E-01	.6	2.0064E-15	-133.2	7.1948E-02	80.5	1.0055E-15	-162.7
.344	.417	2.40	3.3921E-01	-88.2	7.8726E-15	-94.6	6.5133E-01	.7	2.4939E-15	-134.0	8.0467E-02	79.7	1.1595E-15	-162.0
.354	.455	2.20	3.8296E-01	-95.6	7.3494E-15	-95.5	6.0053E-01	.7	3.1414E-15	-134.7	8.9925E-02	78.6	1.3426E-15	-161.2
.366	.500	2.00	3.4793E-01	-103.4	6.6945E-15	-96.7	5.3906E-01	.8	4.0055E-15	-135.3	1.0008E-01	77.4	1.5586E-15	-160.2
.372	.526	1.90	3.5714E-01	-107.4	6.3174E-15	-97.5	5.3360E-01	.9	4.5390E-15	-135.6	1.0523E-01	76.6	1.6790E-15	-159.6
.378	.556	1.80	3.6943E-01	-111.4	5.8952E-15	-98.5	4.6442E-01	1.0	5.1502E-15	-135.5	1.1023E-01	75.8	1.8068E-15	-159.0
.385	.588	1.70	3.4466E-01	-115.4	5.4522E-15	-99.7	4.2322E-01	1.1	5.8765E-15	-135.4	1.1509E-01	74.8	1.9588E-15	-158.3
.392	.625	1.60	4.0328E-01	-119.4	4.9772E-15	-101.1	3.7870E-01	1.2	6.7306E-15	-135.2	1.1950E-01	73.6	2.1332E-15	-157.5
.399	.667	1.50	4.2398E-01	-123.2	4.4660E-15	-103.0	3.3038E-01	1.3	7.6572E-15	-134.7	1.2278E-01	72.2	2.3033E-15	-156.5
.407	.714	1.40	4.4565E-01	-127.0	3.8642E-15	-105.2	2.7460E-01	1.5	8.6430E-15	-133.8	1.2424E-01	70.5	2.4558E-15	-155.3
.415	.769	1.30	4.6588E-01	-130.5	3.2431E-15	-108.4	2.2413E-01	1.9	9.5646E-15	-132.3	1.2296E-01	68.5	2.5689E-15	-153.9
.424	.833	1.20	4.8052E-01	-133.8	2.6003E-15	-113.5	1.6453E-01	2.5	1.0260E-14	-130.0	1.1776E-01	66.1	2.6047E-15	-152.1
.433	.909	1.10	4.8246E-01	-136.8	1.9904E-15	-120.3	1.1441E-01	3.5	1.0492E-14	-126.4	1.0723E-01	63.1	2.5304E-15	-149.8
.442	1.000	1.00	4.6792E-01	-139.4	1.4403E-15	-130.2	2.5800E-02	5.7	9.7454E-15	-120.2	9.0142E-02	57.1	2.2709E-15	-146.7
.451	1.111	.90	4.0761E-01	-141.3	1.7241E-15	-144.6	2.8023E-02	11.0	8.0553E-15	-108.8	6.6184E-02	53.6	1.7765E-15	-142.3
.461	1.250	.80	3.0554E-01	-142.0	7.6476E-16	-163.3	6.4746E-03	30.1	5.9975E-15	45.7	3.7769E-02	45.1	1.0557E-15	-134.8
.469	1.429	.70	1.6284E-01	-139.9	3.1336E-16	177.7	2.7098E-03	109.1	6.1630E-15	-44.3	1.2372E-02	28.8	3.3274E-16	-115.9
.475	1.667	.60	1.5978E-01	-124.6	1.4020E-16	165.3	7.9145E-03	144.6	1.2100E-14	-6.8	1.7633E-03	-47.5	1.0280E-16	-21.5
.464	2.000	.50	2.4317E-02	-9.9	2.0216E-16	-47.1	4.9745E-03	153.3	1.4149E-14	20.0	7.0144E-03	-129.6	5.3176E-16	36.0
.422	2.500	.40	2.6342E-02	...	2.0429E-16	101.3	6.3369E-04	-74.4	2.4415E-15	107.6	2.6480E-03	-177.8	3.2205E-16	97.7
.282	3.333	.30	1.5978E-02	...	1.4903E-16	-3.6	3.5933E-04	-36.5	2.5666E-15	-140.3	2.1203E-03	6.9	4.8367E-16	-130.0
.282	5.000	.20	1.8077E-02	...	1.8077E-16	...	3.5933E-04	-99.5	9.7572E-16	154.5	1.5329E-04	46.8	8.7829E-16	150.8
.35:10.000	.10		2.4903E-03		1.5976E-17	26.9	6.3875E-05	11.5	2.4616E-16	-55.0	3.8957E-05	-109.2	3.5516E-17	-59.7

TABLE 18 - DE-1078, RESPONSE AMPLITUDE OPERATORS, 0 DEGREES, 20 KNOTS

SHIP MOTIONS IN REGULAR WAVES   •••   DE 1078 (DRAFT=15.5FT)

•••

HEADING = 0. DEG   SHIP SPEED = 20.00 KNOTS   WAVE SLOPE (360*H/LAMBDA), K*H, = 2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .2923   WAVE STEEPNESS (2*H/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.219	.238 4.20	1.7206E+00	-46.1	2.0066E-14	-95.6	8.3808E-01	.3	6.3360E-16	-138.0	2.4461E-02	77.8	3.2906E-16	-146.1
.222	.256 3.90	1.6096E+00	-50.3	2.0522E-14	-95.9	8.1721E-01	.3	7.6156E-16	-138.9	2.7971E-02	77.8	3.9379E-16	-146.1
.226	.278 3.60	1.5086E+00	-55.1	2.1010E-14	-96.2	7.9189E-01	.3	9.2842E-16	-139.9	3.2192E-02	77.7	4.8022E-16	-146.1
.228	.294 3.40	1.4543E+00	-58.4	2.1352E-14	-96.6	7.7192E-01	.3	1.0687E-15	-140.5	3.5484E-02	77.6	5.5471E-16	-146.1
.230	.312 3.20	1.4135E+00	-62.9	2.1704E-14	-97.0	7.4891E-01	.3	1.2397E-15	-141.3	3.9229E-02	77.4	6.4772E-16	-146.1
.232	.333 3.00	1.3903E+00	-67.6	2.2060E-14	-97.5	7.2225E-01	.3	1.4492E-15	-142.0	4.3493E-02	77.1	7.6547E-16	-146.1
.234	.357 2.80	1.3906E+00	-72.8	2.2418E-14	-98.1	6.9117E-01	.3	1.7086E-15	-142.8	4.8344E-02	76.7	9.1687E-16	-146.1
.236	.385 2.60	1.4236E+00	-78.6	2.2758E-14	-98.9	6.5473E-01	.2	2.0318E-15	-143.6	5.3845E-02	76.2	1.1149E-15	-146.1
.237	.417 2.40	1.5037E+00	-85.1	2.3060E-14	-100.0	6.1176E-01	.2	2.4365E-15	-144.4	6.0029E-02	75.5	1.3788E-15	-146.1
.238	.455 2.20	1.6542E+00	-92.1	2.3288E-14	-101.4	5.6085E-01	.2	2.9439E-15	-145.2	6.6860E-02	74.7	1.7379E-15	-146.1
.238	.500 2.00	1.9154E+00	-99.5	2.3386E-14	-103.4	5.0035E-01	.0	3.5754E-15	-146.0	7.4147E-02	73.5	2.2371E-15	-145.9
.237	.526 1.90	2.1032E+00	-103.4	2.3361E-14	-104.7	4.6597E-01	.0	3.9422E-15	-146.4	7.7819E-02	72.8	2.5599E-15	-145.9
.236	.556 1.80	2.3600E+00	-107.2	2.3270E-14	-106.3	4.2855E-01	-.1	4.3423E-15	-146.7	8.1371E-02	72.0	2.9466E-15	-145.7
.234	.588 1.70	2.6907E+00	-111.0	2.3103E-14	-108.2	3.8796E-01	-.1	4.7709E-15	-147.1	8.4633E-02	71.0	3.4119E-15	-145.5
.232	.625 1.60	3.1270E+00	-114.8	2.2849E-14	-110.7	3.4414E-01	-.2	5.2162E-15	-147.4	8.7361E-02	69.8	3.9733E-15	-145.3
.229	.667 1.50	3.7174E+00	-118.4	2.2512E-14	-113.9	2.9721E-01	-.2	5.6560E-15	-147.6	8.9210E-02	68.7	4.6506E-15	-145.0
.225	.714 1.40	4.5206E+00	-122.0	2.2128E-14	-118.0	2.4758E-01	-.1	6.0507E-15	-147.8	8.9706E-02	67.2	5.4639E-15	-144.6
.219	.769 1.30	5.6413E+00	-125.3	2.1803E-14	-123.6	1.9614E-01	-.1	6.3346E-15	-147.8	8.8221E-02	65.4	6.4262E-15	-144.2
.211	.833 1.20	7.2500E+00	-128.3	2.1807E-14	-131.0	1.4447E-01	.5	6.4055E-15	-147.7	8.3979E-02	63.4	7.5271E-15	-143.5
.201	.909 1.10	9.6486E+00	-130.9	2.2778E-14	-141.0	9.5209E-02	1.7	6.1169E-15	-147.4	7.6127E-02	61.0	8.6919E-15	-142.7
.187	1.000 1.00	1.3424E+01	-132.9	2.2774E-14	-153.8	5.2274E-02	4.5	5.2904E-15	-146.5	6.3989E-02	58.1	9.6934E-15	-141.8
.167	1.111 .90	1.9895E+01	-134.0	3.4970E-14	-168.4	2.0737E-02	12.7	3.7920E-15	-144.8	4.7647E-02	54.8	9.9867E-15	-140.9
.141	1.250 .80	3.2803E+01	-133.2	5.5439E-14	176.8	5.2968E-03	44.4	1.7752E-15	-141.0	2.8941E-02	51.1	8.6367E-15	-141.4
.104	1.429 .70	6.5869E+01	-130.3	1.4109E-13	159.2	5.1241E-03	-22.7	1.2103E-15	-120.3	1.2816E-02	43.1	6.0068E-15	-143.9
.049	1.667 .60	3.2116E+02	-116.7	2.2420E-12	111.5	1.3994E-02	110.9	1.2100E-15	22.6	5.0639E-03	48.9	4.7839E-15	152.3
.036	2.000 .50	3.5410E+02	-8.0	2.6135E-11	73.2	6.5435E-03	83.2	7.0478E-15	42.3	1.5273E-03	26.2	1.4458E-13	134.5
.175	2.500 .40	2.5009E+03	36.1	1.0779E-14	-40.4	1.0172E-03	-77.0	2.1061E-16	88.0	1.9621E-03	-154.6	1.0646E-15	82.8
.430	3.333 .30	2.4333E-02	179.6	3.6388E-16	115.4	2.0239E-04	-14.0	1.3364E-15	-141.1	1.6523E-03	12.8	4.1489E-16	-126.2
.996	5.000 .20	1.3910E-04	112.0	2.5438E-17	-6.8	7.3934E-04	-23.9	1.4401E-15	-10.3	7.6742E-04	50.5	1.5964E-17	159.8
2.907	10.000 .10	2.7561E-06	-143.3	3.4302E-20	90.0	5.0613E-05	35.7	8.6938E-20	90.0	1.0808E-04	-139.6	2.5900E-20	-90.0

28

TABLE 19 - DE-1078, RESPONSE AMPLITUDE OPERATORS, 30 DEGREES, 10 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DE 1078 (DRAFT=15.5FT)

HEADING = 30. DEG (HEAD SEAS=180)	SHIP SPEED = 10.00 KNOTS FROUDE NUMBER = .1462	WAVE SLOPE (360*R/LAMBDA), K*H. = 2.25 DEG WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.288	.238	4.20	5.6697E-01	-41.1	3.1176E-01	88.3	8.9015E-01	.4	1.7134E-02	57.4	2.4320E-02	84.5	9.2857E-03	14.1
.297	.256	3.90	4.9321E-01	-44.7	3.1031E-01	88.2	8.7607E-01	.4	2.0933E-02	56.2	2.8037E-02	84.1	1.0906E-02	14.2
.306	.278	3.60	4.2627E-01	-49.0	3.0724E-01	88.1	8.5843E-01	.4	2.6073E-02	54.9	3.2571E-02	83.6	1.2896E-02	14.5
.313	.294	3.40	3.8573E-01	-52.3	3.0607E-01	87.9	8.4411E-01	.4	3.0556E-02	54.0	3.6159E-02	83.3	1.4449E-02	14.7
.321	.312	3.20	3.4874E-01	-56.2	2.9943E-01	87.8	8.2719E-01	.4	3.6211E-02	53.0	4.0297E-02	82.9	1.3351E-02	15.1
.329	.333	3.00	3.1561E-01	-60.6	2.9422E-01	87.5	8.0707E-01	.5	4.3444E-02	52.0	4.5085E-02	82.5	1.8542E-02	15.5
.338	.357	2.80	2.8674E-01	-65.7	2.8720E-01	87.3	7.8295E-01	.5	5.2445E-02	51.1	5.0643E-02	82.0	2.1145E-02	16.0
.348	.385	2.60	2.6264E-01	-71.5	2.7822E-01	86.9	7.5341E-01	.5	5.5770E-02	50.1	5.7103E-02	81.4	2.4280E-02	16.5
.358	.417	2.40	2.4397E-01	-78.1	2.6691E-01	86.4	7.1834E-01	.6	8.1993E-02	49.1	6.4602E-02	80.7	2.8015E-02	17.2
.370	.455	2.20	2.3159E-01	-85.6	2.5273E-01	85.7	6.7482E-01	.6	1.0493E-01	48.2	7.3257E-02	79.9	3.2568E-02	18.0
.383	.500	2.00	2.2650E-01	-93.1	2.3546E-01	84.9	6.2162E-01	.7	1.3723E-01	47.4	8.3172E-02	78.8	3.8260E-02	18.9
.390	.526	1.90	2.2702E-01	-98.3	2.2725E-01	84.3	5.9236E-01	.7	1.5943E-01	47.0	8.8407E-02	79.1	4.2350E-02	19.3
.397	.556	1.80	2.2991E-01	-102.6	2.1743E-01	83.8	5.5970E-01	.7	1.8663E-01	46.7	9.4914E-02	77.3	4.6830E-02	19.8
.405	.588	1.70	2.3530E-01	-107.5	2.0587E-01	83.0	5.2312E-01	.7	2.1927E-01	46.5	1.0109E-01	76.4	5.1700E-02	20.4
.413	.625	1.60	2.4325E-01	-112.1	1.9239E-01	82.0	4.6214E-01	.7	2.5666E-01	46.5	1.0727E-01	75.4	5.6925E-02	21.2
.422	.667	1.50	2.5306E-01	-116.8	1.7688E-01	80.7	4.3648E-01	.7	3.0588E-01	45.6	1.1316E-01	74.2	6.2416E-02	22.1
.432	.714	1.40	2.6627E-01	-121.3	1.5927E-01	79.1	3.8579E-01	.8	3.6170E-01	47.1	1.1832E-01	72.8	6.7977E-02	23.1
.442	.769	1.30	2.8025E-01	-125.8	1.3963E-01	77.0	3.3005E-01	.9	4.2542E-01	47.9	1.2207E-01	71.1	7.3248E-02	24.4
.453	.833	1.20	2.9406E-01	-130.0	1.1821E-01	74.1	2.6977E-01	1.1	4.9590E-01	49.2	1.2339E-01	69.1	7.7587E-02	26.0
.464	.909	1.10	3.0486E-01	-134.1	9.5608E-02	70.9	2.0630E-01	1.4	5.6411E-01	51.6	1.2087E-01	66.5	7.9920E-02	27.3
.476	1.000	1.00	3.0773E-01	-137.8	7.2857E-02	64.2	1.4239E-01	2.1	6.1396E-01	55.0	1.1263E-01	63.3	7.8552E-02	30.4
.490	1.111	.90	2.9494E-01	-141.1	5.1540E-02	55.6	8.2876E-02	3.6	6.1655E-01	61.2	9.6620E-02	59.0	7.1112E-02	33.9
.503	1.250	.80	2.5598E-01	-143.9	3.3549E-02	42.8	3.4991E-02	7.5	5.3941E-01	73.0	7.1624E-02	52.8	5.5103E-02	32.1
.518	1.429	.70	1.8184E-01	-145.5	2.0298E-02	26.2	7.1090E-03	23.6	4.1787E-01	99.5	3.4442E-02	43.0	3.0622E-02	43.1
.532	1.667	.60	8.0556E-02	-144.1	1.0419E-02	.6	2.5093E-03	116.5	5.3426E-01	148.1	1.1232E-02	21.2	7.3890E-03	82.0
.544	2.000	.50	6.8406E-03	-118.0	2.4124E-03	-29.7	8.3225E-03	148.7	1.2434E+00	-172.5	2.6040E-03	-80.3	9.3986E-03	-173.4
.550	2.500	.40	1.6206E-02	9.7	9.9674E-04	154.4	1.9113E-03	162.6	4.4143E-01	-136.2	8.0196E-03	-146.7	2.0225E-02	-127.1
.536	3.333	.30	2.5081E-03	113.0	2.9756E-04	151.1	2.0741E-03	-55.7	6.8174E-01	3.4	9.2986E-04	170.3	1.4413E-02	-.2
.453	5.000	.20	4.7280E-03	-16.1	4.4754E-04	78.1	5.5124E-05	92.6	1.2451E-01	-165.9	7.2986E-04	170.3	1.1637E-02	-150.7
.014	10.000	.10	1.2669E-03	-53.3	6.6373E-03	169.0	5.3341E-04	-92.4	4.1240E-02	175.7	7.2418E-04	-108.4	2.2526E+01	-112.6

29

TABLE 20 - DE-1078, RESPONSE AMPLITUDE OPERATORS, 30 DEGREES, 20 KNOTS

***

SHIP MOTIONS IN REGULAR WAVES ***   DE 1078 (DRAFT=15.5FT)

HEADING = 30. DEG   SHIP SPEED = 20.00 KNOTS   WAVE SLOPE (360*R/LAMBDA), K*R. = 2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .2923   WAVE STEEPNESS (2*H/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.235	.238	4.20	1.2875E+00	-40.3	5.5465E-01	85.3	8.0419E-01	.4	1.9319E-02	46.1	1.8079E-02	77.8	7.4507E-03	32.3
.240	.256	3.90	1.1698E+00	-43.8	5.6280E-01	85.2	8.4047E-01	.4	2.3211E-02	45.2	2.0753E-02	78.0	8.8010E-03	32.4
.245	.278	3.60	1.0627E+03	-47.9	5.7119E-01	84.9	8.2492E-01	.4	2.8305E-02	44.2	2.3998E-02	78.1	1.0591E-02	32.5
.248	.294	3.40	9.9820E-01	-51.1	5.7682E-01	84.7	8.0749E-01	.4	3.2611E-02	43.5	2.6555E-02	78.1	1.2124E-02	32.5
.252	.312	3.20	9.4038E-01	-54.6	5.8238E-01	84.4	7.8822E-01	.4	3.7881E-02	42.8	2.9494E-02	77.9	1.4026E-02	32.4
.255	.333	3.00	8.9439E-01	-58.9	5.8821E-01	84.1	7.6585E-01	.3	4.4445E-02	42.0	3.2942E-02	77.4	1.6552E-02	32.2
.259	.357	2.80	8.4956E-01	-63.7	5.9533E-01	83.6	7.4143E-01	.3	5.2884E-02	41.0	3.7176E-02	76.8	2.0343E-02	31.5
.263	.385	2.60	8.2214E-01	-69.3	6.0111E-01	83.0	7.1226E-01	.2	6.3617E-02	40.0	4.2078E-02	76.1	2.5224E-02	31.0
.266	.417	2.40	8.1278E-01	-75.6	6.0478E-01	82.3	6.7714E-01	.1	7.7398E-02	39.0	4.7743E-02	75.2	3.1629E-02	30.6
.269	.455	2.20	8.2879E-01	-82.7	6.0516E-01	81.3	6.3454E-01	-.3	9.5246E-02	38.0	5.4240E-02	74.1	4.0160E-02	30.4
.272	.500	2.00	8.8203E-01	-90.6	6.0046E-01	79.9	5.8249E-01	-.2	1.1836E-01	37.0	6.1566E-02	73.5	5.1747E-02	30.3
.273	.526	1.90	9.2838E-01	-94.8	5.9540E-01	79.0	5.5219E-01	-.2	1.3230E-01	36.6	6.5493E-02	72.8	5.9097E-02	30.3
.274	.556	1.80	9.9247E-01	-99.1	5.8797E-01	77.9	5.1860E-01	-.3	1.4806E-01	36.1	6.9532E-02	71.9	6.7778E-02	30.4
.275	.588	1.70	1.0792E+00	-103.6	5.7762E-01	76.6	4.8137E-01	-.5	1.6568E-01	35.7	7.3590E-02	71.0	7.8068E-02	30.5
.275	.625	1.60	1.1953E+00	-108.0	5.6374E-01	74.9	4.4018E-01	-.6	1.8508E-01	35.3	7.7521E-02	69.9	9.0294E-02	30.7
.275	.667	1.50	1.3499E+00	-112.4	5.4566E-01	72.8	3.9475E-01	-.7	2.0546E-01	35.0	8.1100E-02	68.6	1.0402E-01	30.9
.274	.714	1.40	1.5556E+00	-116.8	5.2278E-01	70.2	3.4498E-01	-.8	2.2712E-01	34.7	8.3988E-02	67.1	1.2201E-01	31.2
.271	.769	1.30	1.8302E+00	-121.0	4.9475E-01	66.6	2.9103E-01	-1.0	2.4707E-01	34.5	8.5690E-02	65.3	1.4214E-01	31.6
.268	.833	1.20	2.1987E+00	-125.0	4.6209E-01	61.7	2.3358E-01	-1.0	2.6248E-01	34.5	8.5507E-02	63.1	1.6513E-01	32.1
.263	.909	1.10	2.6964E+00	-128.7	4.2718E-01	55.0	1.7422E-01	-.9	2.6807E-01	34.7	8.2503E-02	60.5	1.9008E-01	32.6
.255	1.000	1.00	3.3717E+00	-132.0	3.9636E-01	45.5	1.1589E-01	-.4	2.5596E-01	35.2	7.5547E-02	56.7	2.1415E-01	33.1
.244	1.111	.90	4.2972E+00	-135.0	3.8932E-01	30.8	6.6832E-02	.8	2.2381E-01	36.3	6.4347E-02	51.5	2.4302E-01	33.7
.227	1.250	.80	5.5412E+00	-137.2	4.5523E-01	11.4	2.9450E-02	5.3	1.5949E-01	39.9	4.7538E-02	44.5	2.5722E-01	34.3
.202	1.429	.70	7.1112E+00	-137.7	6.9359E-01	-9.4	4.6482E-03	29.2	7.0767E-02	46.8	2.6745E-02	32.8	2.2709E-01	34.4
.163	1.667	.60	8.6418E+00	-134.1	1.2409E+00	-28.7	3.8545E-03	113.9	9.1752E-03	98.4	4.1672E-03	-27.6	1.2028E-01	28.8
.101	2.000	.50	7.1414E+00	107.8	3.0432E+00	-56.6	7.3630E-03	130.6	5.5804E-03	-170.7	5.2156E-04	6.2	4.1807E-02	-35.8
.014	2.500	.40	2.9301E+04	18.6	5.4427E+06	148.5	5.1497E-02	31.0	1.4325E+01	154.5	2.4005E-02	75.5	3.1283E-03	-125.3
.202	3.333	.30	1.1860E-01	109.9	2.8162E-02	-162.1	1.6169E-03	-69.2	6.9187E-02	-2.3	2.1263E-04	7.8	3.5302E-02	7.8
.654	5.000	.20	1.1692E-03	-18.5	8.0131E-03	-122.2	2.2481E-04	143.8	6.1186E+00	-100.6	1.0726E-03	174.9	2.3386E-02	-105.8
2.221	10.000	.10	6.3865E-07	-77.2	1.8531E-06	51.2	8.9764E-06	-82.3	5.6554E-06	145.2	4.6862E-06	75.5	1.0171E-06	-102.9

TABLE 21 - DE-1078, RESPONSE AMPLITUDE OPERATORS, 60 DEGREES, 10 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DE 1078 (DRAFT=15.5FT)

HEADING = 60. DEG   SHIP SPEED = 10.00 KNOTS   WAVE SLOPE (360*R/LAMBDA), K*R, =.2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .1462   WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE/R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY/R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE/R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL/R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH/R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW/R)**2 AMPL. RATIO SQUARED	PHASE DEG
.217	.238	4.20	4.3195E-01	-25.3	7.7616E-01	88.9	9.5249E-01	.3	4.6217E-02	69.2	7.8632E-03	84.2	8.9748E-03	12.2
.321	.256	3.90	3.6832E-01	-27.4	8.5207E-01	88.9	9.4676E-01	.3	5.6006E-02	68.3	9.1954E-03	84.1	1.0293E-02	12.6
.332	.278	3.60	7.1646E-01	-29.7	8.4461E-01	88.8	9.3924E-01	.3	6.9233E-02	67.3	1.0850E-02	84.0	1.1898E-02	13.1
.341	.294	3.40	7.7468E-01	-31.6	8.3792E-01	88.8	9.3290E-01	.3	8.0797E-02	66.5	1.2184E-02	83.9	1.3178E-02	13.6
.350	.312	3.20	2.4097E-01	-33.8	8.2913E-01	88.7	9.2515E-01	.3	9.5460E-02	65.7	1.3750E-02	83.8	1.4677E-02	14.1
.360	.333	3.00	2.0964E-01	-35.3	8.1812E-01	88.6	9.1562E-01	.4	1.1441E-01	64.9	1.5602E-02	83.7	1.6452E-02	14.8
.371	.357	2.80	1.8069E-01	-39.2	8.0476E-01	88.5	9.0380E-01	.4	1.3942E-01	64.0	1.7810E-02	83.5	1.8583E-02	15.4
.384	.385	2.60	1.5413E-01	-42.7	7.9181E-01	88.3	8.8988E-01	.4	1.7351E-01	63.0	2.0516E-02	83.3	2.1376E-02	16.0
.397	.417	2.40	1.2982E-01	-46.3	7.9075E-01	88.2	8.7717E-01	.4	2.2267E-01	61.8	2.4110E-02	82.8	2.5860E-02	16.0
.412	.455	2.20	1.0834E-01	-52.1	7.3654E-01	88.1	8.6062E-01	.3	2.9490E-01	60.6	2.8591E-02	82.3	3.1411E-02	16.2
.430	.500	2.00	8.9887E-02	-58.5	7.6922E-01	87.8	8.3868E-01	.3	4.0602E-01	59.4	3.4244E-02	81.7	3.8428E-02	16.9
.439	.526	1.90	8.1845E-02	-62.3	7.5879E-01	87.5	8.2503E-01	.3	5.8487E-01	58.8	3.7625E-02	81.3	4.2665E-02	17.3
.449	.556	1.80	7.4756E-02	-66.5	7.4591E-01	87.3	8.0909E-01	.3	5.8710E-01	58.3	4.1454E-02	80.9	4.7519E-02	17.9
.460	.588	1.70	6.8553E-02	-71.3	7.3037E-01	86.9	7.9039E-01	.3	7.2225E-01	57.9	4.5806E-02	80.5	5.3125E-02	18.5
.472	.625	1.60	6.3336E-02	-76.6	7.1194E-01	86.5	7.6835E-01	.3	9.0495E-01	57.5	5.0739E-02	79.9	5.9654E-02	19.4
.485	.667	1.50	5.9176E-02	-82.5	6.9041E-01	86.0	7.4223E-01	.3	1.1585E+00	57.3	5.6354E-02	79.3	6.7331E-02	20.3
.499	.714	1.40	5.6147E-02	-88.9	6.6564E-01	85.3	7.1111E-01	.3	1.5217E+00	57.2	6.2729E-02	78.6	7.6458E-02	21.5
.514	.769	1.30	5.4307E-02	-95.9	6.4150E-01	84.5	6.7566E-01	.3	2.0719E+00	57.5	7.0157E-02	77.7	8.8324E-02	23.0
.531	.833	1.20	5.3766E-02	-103.3	6.2084E-01	83.6	6.3666E-01	.2	2.9549E+00	58.3	7.9045E-02	76.6	1.0448E-01	24.8
.549	.909	1.10	5.4610E-02	-111.0	5.9741E-01	82.4	5.8929E-01	.2	4.4387E+00	60.0	8.9044E-02	75.2	1.2411E-01	27.3
.570	1.000	1.00	5.6819E-02	-118.8	5.7418E-01	80.8	5.3160E-01	.1	7.1040E+00	63.2	9.9980E-02	73.5	1.4827E-01	30.9
.594	1.111	.90	6.0120E-02	-126.5	5.6482E-01	79.3	4.6144E-01	.0	1.2454E+01	69.1	1.1126E-01	71.3	1.7789E-01	36.7
.620	1.250	.80	6.3792E-02	-134.1	5.8032E-01	79.6	3.7703E-01	-.0	4.4403E-01	81.1	1.2143E-01	68.4	2.0955E-01	47.1
.651	1.429	.70	6.6224E-02	-141.3	5.8640E-01	89.4	2.8045E-01	-.0	4.9453E-01	108.8	1.2799E-01	64.4	1.9230E-01	69.1
.688	1.667	.60	6.4012E-02	-148.4	2.4196E-01	114.0	1.7537E-01	.5	4.3912E-01	159.3	1.2486E-01	58.7	3.8768E-02	95.2
.731	2.000	.50	5.1408E-02	-155.6	8.4625E-03	112.4	7.3943E-02	2.6	1.0941E-01	-152.9	1.0038E-01	49.5	1.1508E-02	26.9
.784	2.500	.40	5.4390E-02	-163.9	8.9153E-03	-24.0	8.9153E-03	17.5	2.1790E-02	-81.0	4.6651E-02	31.5	1.4385E-02	22.4
.848	3.333	.30	7.4860E-02	176.1	3.4091E-02	-22.4	6.3872E-04	153.4	2.8295E+00	-9.2	4.9008E-03	-61.1	2.4713E-05	67.8
.921	5.000	.20	.7298E-04	-4.3	8.8098E-03	129.7	4.3702E-04	-124.9	3.6108E-01	136.2	5.2289E-03	163.4	1.8384E-03	-79.0
.928	10.000	.10	7.0658E-06	-25.2	2.1429E-03	158.2	1.0204E-05	158.0	1.7713E-01	152.3	6.6664E-04	30.9	7.8498E-04	-12.9

31

TABLE 22 - DE-1078, RESPONSE AMPLITUDE OPERATORS, 60 DEGREES, 20 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DE 1078 (DRAFT=15.5FT)

HEADING = 60. DEG (HEAD SEAS=180)	SHIP SPEED = 20.00 KNOTS FROUDE NUMBER = .2923	WAVE SLOPE (360*R/LAMBDA), K*R, = 2.25 DEG WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

wL RPS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.280	.238	4.20	6.5535E-01	-25.0	1.1016E+00	87.1	9.2977E-01	.3	4.7119E-02	58.7	5.5069E-03	71.8	7.6284E-03	25.0
.288	.256	3.90	5.6996E-01	-27.0	1.1130E+00	87.0	9.2359E-01	.3	5.6579E-02	57.8	6.5653E-03	72.2	9.1537E-03	24.2
.297	.278	3.60	4.9206E-01	-29.3	1.1228E+00	87.0	9.1564E-01	.2	6.9193E-02	56.8	7.8827E-03	72.7	1.1069E-02	23.7
.303	.294	3.40	4.4024E-01	-31.2	1.1282E+00	86.9	9.0908E-01	.2	8.0064E-02	56.1	8.9459E-03	73.0	1.2504E-02	23.5
.310	.312	3.20	3.9294E-01	-33.3	1.1324E+00	86.9	9.0121E-01	.2	9.3650E-02	55.3	1.0195E-02	73.2	1.4412E-02	23.3
.318	.333	3.00	3.4838E-01	-35.7	1.1350E+00	86.8	8.9171E-01	.2	1.1089E-01	54.4	1.1675E-02	73.5	1.6614E-02	23.3
.326	.357	2.80	3.0668E-01	-38.6	1.1356E+00	86.6	8.8015E-01	.1	1.3314E-01	53.5	1.3441E-02	73.7	1.9309E-02	23.3
.334	.385	2.60	2.6802E-01	-42.0	1.1342E+00	86.4	8.6595E-01	.1	1.6242E-01	52.5	1.5567E-02	73.9	2.2649E-02	23.4
.344	.417	2.40	2.3263E-01	-46.0	1.1294E+00	86.2	8.4833E-01	.0	2.0184E-01	51.4	1.8150E-02	73.9	2.6939E-02	23.6
.354	.455	2.20	2.0083E-01	-51.0	1.1203E+00	85.9	8.2622E-01	-.1	2.5626E-01	50.2	2.1320E-02	73.9	3.2497E-02	23.8
.366	.500	2.00	1.7313E-01	-57.1	1.1055E+00	85.5	7.9312E-01	-.2	3.3360E-01	49.0	2.5248E-02	73.8	3.9876E-02	24.1
.372	.526	1.90	1.6104E-01	-60.8	1.0952E+00	85.2	7.8119E-01	-.2	3.9473E-01	48.3	2.7565E-02	73.6	4.4520E-02	24.3
.378	.556	1.80	1.5027E-01	-64.8	1.0825E+00	84.8	7.6191E-01	-.3	4.4722E-01	47.6	3.0163E-02	73.4	4.9992E-02	24.5
.385	.588	1.70	1.4089E-01	-69.0	1.0711E+00	84.5	7.4168E-01	-.4	5.2581E-01	46.9	3.3286E-02	73.0	5.7374E-02	24.5
.392	.625	1.60	1.3313E-01	-74.4	1.0598E+00	84.0	7.1490E-01	-.6	6.2609E-01	46.1	3.7039E-02	72.5	6.7134E-02	24.3
.390	.667	1.50	1.2741E-01	-80.1	1.0431E+00	83.4	6.9461E-01	-.8	7.5346E-01	45.3	4.1292E-02	71.9	7.8659E-02	24.3
.407	.714	1.40	1.2457E-01	-86.4	1.0193E+00	82.7	6.6495E-01	-1.0	9.1640E-01	44.5	4.6101E-02	71.1	9.3048E-02	24.4
.415	.769	1.30	1.2357E-01	-93.2	9.8870E-01	81.3	6.3002E-01	-1.2	1.1231E+00	43.7	5.1510E-02	70.2	1.1035E-01	24.6
.424	.833	1.20	1.2648E-01	-100.4	9.4755E-01	80.6	5.8869E-01	-1.6	1.4031E+00	43.1	5.7529E-02	69.0	1.3154E-01	24.0
.431	.909	1.10	1.3352E-01	-108.0	8.9401E-01	79.0	5.3964E-01	-2.0	1.7613E+00	42.5	6.4090E-02	67.5	1.5766E-01	25.4
.442	1.000	1.00	1.4553E-01	-115.7	8.2541E-01	76.9	4.8140E-01	-2.6	2.2227E+00	42.1	7.0965E-02	65.6	1.8962E-01	26.0
.452	1.111	.90	1.6326E-01	-123.5	7.3847E-01	73.9	4.1247E-01	-3.4	2.7971E+00	41.9	7.7605E-02	63.2	2.2805E-01	26.9
.461	1.250	.80	1.8706E-01	-131.1	6.3058E-01	69.5	3.3190E-01	-4.6	3.4501E+00	42.1	8.2844E-02	59.8	2.7192E-01	28.0
.469	1.429	.70	2.1506E-01	-138.6	5.0178E-01	62.6	2.4042E-01	-6.2	4.0186E+00	43.0	8.4385E-02	55.3	3.1519E-01	29.4
.475	1.667	.60	2.3933E-01	-145.9	3.6027E-01	51.0	1.4317E-01	-8.7	4.0541E+00	45.3	7.8131E-02	48.6	3.3890E-01	31.5
.476	2.000	.50	2.3597E-01	-153.3	2.3315E-01	29.9	5.4929E-02	-12.5	2.8160E+00	52.2	5.8402E-02	38.2	2.9762E-01	34.8
.464	2.500	.40	1.5489E-01	-162.0	1.6287E-01	-5.3	4.1469E-03	-16.9	7.0704E-01	86.9	2.4408E-02	18.7	1.3499E-01	42.2
.422	3.333	.30	9.3406E-03	168.5	6.2282E-02	-42.1	4.0460E-03	140.3	1.3849E+00	-178.2	1.6803E-03	-67.2	1.0828E-02	-179.3
.282	5.000	.20	3.7991E-02	15.7	2.7030E-01	129.5	5.7924E-04	-51.6	2.0313E-02	-70.6	6.2648E-04	155.8	3.6349E-02	-114.9
.356	10.000	.10	1.0463E-01	-130.1	5.2815E-03	-139.6	6.1921E-05	-119.7	1.5249E-01	-29.0	7.2935E-05	-13.0	2.5421E-02	-19.1

TABLE 23 - DE-1078, RESPONSE AMPLITUDE OPERATORS, 90 DEGREES, 10 KNOTS

***

SHIP MOTIONS IN REGULAR WAVES ***   DE 1078 (DRAFT=15.5FT)

HEADING = 90. DEG (HEAD SEAS=180)
SHIP SPEED = 10.00 KNOTS
FROUDE NUMBER = .1462
WAVE SLOPE (360*R/LAMBDA), K*R, = 2.25 DEG
WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE/R)**2 AMPL RATIO SQUARED	PHASE DEG	(SWAY/R)**2 AMPL RATIO SQUARED	PHASE DEG	(HEAVE/R)**2 AMPL RATIO SQUARED	PHASE DEG	(ROLL/R)**2 AMPL RATIO SQUARED	PHASE DEG	(PITCH/R)**2 AMPL RATIO SQUARED	PHASE DEG	(YAW/R)**2 AMPL RATIO SQUARED	PHASE DEG
.341	.238	4.20	3.1740E-01	-6.2	5.5906E-01	89.1	9.9207E-01	89.3	6.2255E-02	89.3	1.7761E-04	-53.4	1.0215E-04	35.5
.353	.256	3.90	2.6930E-01	-6.5	9.4664E-01	89.2	9.9100E-01	89.5	7.5339E-02	89.5	1.8926E-04	-52.8	1.0654E-04	47.5
.368	.278	3.60	2.2523E-01	-6.9	9.3083E-01	89.2	9.8903E-01	89.7	9.3050E-02	89.7	2.0483E-04	-52.5	1.2760E-04	60.8
.379	.294	3.40	1.9810E-01	-7.1	9.1823E-01	89.1	9.8700E-01	89.8	1.0860E-01	89.8	2.1813E-04	-52.4	1.5645E-04	69.3
.390	.312	3.20	1.7263E-01	-7.4	9.2097E-01	89.2	9.8780E-01	90.2	1.2830E-01	90.2	2.2656E-04	-50.7	1.6568E-04	69.6
.403	.333	3.00	1.4892E-01	-7.7	9.2677E-01	89.3	9.8974E-01	90.7	1.5405E-01	90.7	2.3418E-04	-48.3	1.7264E-04	69.3
.417	.357	2.80	1.2702E-01	-8.1	9.2900E-01	89.3	9.9172E-01	91.2	1.8873E-01	91.2	2.4420E-04	-45.9	1.9697E-04	71.6
.433	.385	2.60	1.0691E-01	-8.5	9.1734E-01	89.3	9.9346E-01	91.8	2.3703E-01	91.8	2.5746E-04	-43.6	2.3378E-04	76.0
.451	.417	2.40	8.8606E-02	-8.9	9.1480E-01	89.3	9.9479E-01	92.5	3.0723E-01	92.5	2.7529E-04	-41.5	3.1453E-04	81.9
.471	.455	2.20	7.2081E-02	-9.5	9.1131E-01	89.3	9.9537E-01	93.4	4.1504E-01	93.4	2.9981E-04	-39.4	4.7103E-04	88.2
.494	.500	2.00	5.7329E-02	-10.1	8.9709E-01	89.3	9.9437E-01	94.6	5.9351E-01	94.6	3.3462E-04	-37.5	7.8011E-04	94.0
.506	.526	1.90	5.0614E-02	-10.5	8.8878E-01	89.3	9.9335E-01	95.4	7.3055E-01	95.4	3.5764E-04	-36.6	1.0408E-03	96.7
.520	.556	1.80	4.4260E-02	-10.9	8.9396E-01	89.6	9.9607E-01	96.6	9.1744E-01	96.6	3.7493E-04	-34.6	1.2729E-03	98.4
.535	.588	1.70	3.8343E-02	-11.3	9.0108E-01	89.6	9.9765E-01	98.2	1.1494E+00	98.2	3.9465E-04	-32.3	1.6288E-03	101.0
.552	.625	1.60	3.2877E-02	-11.8	9.0852E-01	89.8	1.0034E+00	100.3	1.6040E+00	100.3	4.2007E-04	-29.9	2.2416E-03	104.6
.570	.667	1.50	2.7858E-02	-12.3	9.1801E-01	90.0	1.0072E+00	103.4	2.3037E+00	103.4	4.5322E-04	-27.4	3.3647E-03	109.3
.590	.714	1.40	2.3282E-02	-12.9	9.3268E-01	90.6	1.0109E+00	108.1	3.5667E+00	108.1	4.9711E-04	-24.9	5.5810E-03	115.5
.612	.769	1.30	1.9406E-02	-13.7	9.5680E-01	91.8	1.0142E+00	116.0	6.1439E+00	116.0	5.5632E-04	-22.3	1.0435E-02	124.8
.637	.833	1.20	1.5437E-02	-14.5	9.8264E-01	95.0	1.0174E+00	131.3	1.1865E+01	131.3	6.3043E-04	-19.6	2.1867E-02	141.1
.665	.909	1.10	1.2070E-02	-15.4	8.9869E-01	101.8	1.0269E+00	161.3	1.4597E+01	161.3	7.2606E-04	-15.3	3.7880E-02	173.4
.698	1.000	1.00	9.1572E-03	-16.6	6.3040E-01	103.5	1.0429E+00	-161.7	1.5388E+01	-161.7	8.6229E-04	-10.7	3.2367E-02	-146.9
.736	1.111	.90	6.6890E-03	-18.0	5.1604E-01	97.8	1.0592E+00	-138.8	7.3610E+00	-138.8	1.0787E-03	-5.6	1.7382E-02	-121.6
.780	1.250	.80	4.6149E-03	-20.0	4.8257E-01	94.0	1.0601E+00	-128.2	3.6420E+00	-128.2	1.4263E-03	.6	9.5153E-03	-107.7
.834	1.429	.70	2.9313E-03	-22.6	4.5594E-01	91.3	1.1247E+00	-124.1	1.9984E+00	-124.1	2.0397E-03	8.8	5.8956E-03	-97.6
.901	1.667	.66	1.6777E-03	-26.9	4.1627E-01	89.8	1.1846E+00	-122.9	1.1451E+00	-122.9	3.3169E-03	19.2	4.1351E-03	-89.9
.987	2.000	.50	8.0937E-04	-34.1	3.5862E-01	88.0	1.2797E+00	-124.6	7.1055E-01	-124.6	6.3790E-03	35.1	3.1701E-03	-80.5
1.104	2.500	.40	3.5533E-04	-51.1	2.8210E-01	84.9	1.3279E+00	-128.8	4.3841E-01	-128.8	1.4515E-02	62.7	2.6302E-03	-70.1
1.274	3.333	.30	1.6346E-04	-64.3	1.8649E-01	74.7	4.1846E-01	-137.2	2.5945E-01	-137.2	2.3123E-02	111.9	2.3970E-03	-58.5
1.561	5.000	.20	7.6604E-06	-110.6	7.9507E-02	62.7	1.5090E-01	-153.8	1.1174E-01	-153.8	8.2202E-03	157.0	2.1323E-03	-49.1
2.207	10.050	.10	1.1293E-05	139.4	7.0635E-03	-18.7	6.6274E-03	146.2	1.8597E-02	146.2	8.2594E-04	151.5	1.2409E-03	-69.6

TABLE 24 - DE-1078, RESPONSE AMPLITUDE OPERATORS, 90 DEGREES, 20 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DE 1078 (DRAFT=15.5FT)

HEADING = 90. DEG (HEAD SEAS=180)	SHIP SPEED = 20.00 KNOTS FROUDE NUMBER = .2923	WAVE SLOPE (360*R/LAMBDA), K*H. = 2.25 DEG WAVE STEEPNESS (2**R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.341	.238	4.20	3.1673E-01	-6.2	9.4056E-01	88.2	9.8595E-01	.2	6.1639E-02	85.8	9.7170E-04	-37.8	2.7595E-04	25.7
.353	.256	3.90	2.6807E-01	-6.5	9.3129E-01	88.2	9.8483E-01	.2	7.4910E-02	86.1	1.0178E-03	-37.5	2.4203E-04	33.8
.368	.278	3.60	2.2465E-01	-6.8	9.1892E-01	88.2	9.8277E-01	.2	9.2970E-02	86.4	1.0749E-03	-37.6	2.2288E-04	45.3
.379	.294	3.40	1.9754E-01	-7.1	9.0874E-01	88.2	9.8064E-01	.2	1.0849E-01	86.6	1.1218E-03	-37.8	2.2513E-04	54.6
.390	.312	3.20	1.7210E-01	-7.4	9.1154E-01	88.3	9.8181E-01	.2	1.2459E-01	87.1	1.1605E-03	-36.5	2.3756E-04	54.9
.403	.333	3.00	1.4841E-01	-7.7	9.1711E-01	88.4	9.8427E-01	.2	1.5426E-01	87.7	1.1991E-03	-34.6	2.5117E-04	54.1
.417	.357	2.80	1.2654E-01	-8.0	9.1970E-01	88.4	9.8668E-01	.1	1.8906E-01	88.4	1.2447E-03	-32.8	2.6849E-04	56.4
.433	.385	2.60	1.0647E-01	-8.4	9.1917E-01	88.5	9.8894E-01	.1	2.3786E-01	89.1	1.2995E-03	-31.1	2.9761E-04	61.6
.451	.417	2.40	8.8189E-02	-8.9	9.1503E-01	88.5	9.9046E-01	.1	3.0928E-01	89.9	1.3671E-03	-29.5	3.5672E-04	69.5
.471	.455	2.20	7.1695E-02	-9.4	9.0725E-01	88.4	9.9611E-01	.1	4.1179E-01	90.8	1.4530E-03	-28.1	4.8305E-04	79.1
.494	.500	2.00	5.6976E-02	-10.1	8.9617E-01	88.4	9.9218E-01	.1	6.0422E-01	92.1	1.5666E-03	-26.9	7.5507E-04	88.6
.506	.526	1.90	5.0277E-02	-10.5	8.9890E-01	88.3	9.9152E-01	.1	7.4674E-01	92.9	1.6384E-03	-26.4	9.9546E-04	93.0
.520	.556	1.80	4.3941E-02	-10.3	8.9612E-01	88.4	9.9482E-01	.1	9.3866E-01	94.2	1.6940E-03	-24.9	1.2188E-03	95.1
.535	.588	1.70	3.8043E-02	-11.3	9.0501E-01	88.5	9.9910E-01	.2	1.2193E+00	96.0	1.7549E-03	-23.1	1.5552E-03	98.2
.552	.625	1.60	3.2595E-02	-11.7	9.1539E-01	88.7	1.0036E+00	.2	1.6547E+00	98.3	1.8290E-03	-21.3	2.1388E-03	102.6
.570	.667	1.50	2.7596E-02	-12.3	9.2906E-01	88.9	1.0082E+00	.2	2.3804E+00	101.6	1.9206E-03	-19.5	3.2144E-03	108.2
.590	.714	1.40	2.3040E-02	-12.7	9.5229E-01	89.3	1.0179E+00	.3	3.7063E+00	106.6	2.0356E-03	-17.7	5.3639E-03	115.5
.612	.769	1.30	1.8924E-02	-13.7	9.9013E-01	90.5	1.0175E+00	.3	6.4110E+00	115.1	2.1832E-03	-15.9	1.0114E-02	126.0
.637	.833	1.20	1.5236E-02	-14.6	1.0370E+00	93.3	1.0223E+00	.4	1.2455E+01	131.4	2.3722E-03	-14.0	2.1103E-02	143.5
.665	.909	1.10	1.1892E-02	-15.5	9.6073E-01	101.2	1.0352E+00	.6	1.8036E+01	162.0	2.5581E-03	-10.7	3.4177E-02	176.4
.698	1.000	1.00	9.0042E-03	-16.7	6.8378E-01	103.8	1.0504E+00	1.1	1.4066E+01	-141.6	2.8211E-03	-7.2	2.7795E-02	-145.8
.736	1.111	.90	6.5610E-03	-18.2	5.4525E-01	99.2	1.0686E+00	1.1	6.9200E+00	-131.6	3.2085E-03	-3.2	1.5422E-02	-122.3
.780	1.250	.80	4.5133E-03	-20.2	4.9518E-01	95.5	1.0941E+00	1.7	3.5444E+00	-131.6	3.7615E-03	1.7	8.7309E-03	-109.5
.834	1.429	.70	2.8543E-03	-23.0	4.5947E-01	93.2	1.1358E+00	2.8	2.0034E+00	-127.7	4.5916E-03	8.5	5.4980E-03	-100.1
.901	1.667	.60	1.6321E-03	-27.5	4.1462E-01	91.1	1.1934E+00	4.8	1.2132E+00	-126.5	6.0933E-03	17.3	3.9662E-03	-93.4
.987	2.000	.50	7.8656E-04	-35.6	3.5353E-01	89.1	1.2779E+00	9.2	7.5889E-01	-127.9	8.9707E-03	30.8	2.9532E-03	-85.1
1.104	2.500	.40	3.3366E-04	-52.0	2.7490E-01	85.7	1.3126E+00	19.7	4.8499E-01	-131.4	1.5084E-02	53.9	2.3617E-03	-76.3
1.274	3.333	.30	1.5153E-04	-70.5	1.7890E-01	79.4	8.1952E-01	41.1	2.9420E-01	-138.3	2.0976E-02	96.1	2.0306E-03	-66.5
1.561	5.000	.20	1.3760E-05	-111.7	7.5060E-02	62.7	1.2923E-01	43.5	1.3495E-01	-152.8	8.6334E-03	142.0	1.8198E-03	-59.7
2.2071	10.000	.19	1.0948E-05	139.7	6.8962E-03	-12.4	6.4080E-03	-12.8	1.8799E-02	147.6	8.9057E-04	146.8	1.3026E-03	-76.1

34

TABLE 25 - DE-1078, RESPONSE AMPLITUDE OPERATORS, 120 DEGREES, 10 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DE 1078 (DRAFT=15.5FT)   ***

HEADING = 120. DEG   SHIP SPEED = 10.00 KNOTS   WAVE SLOPE (360*R/LAMBDA), K*R. = 2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .1462   WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.371	.634	4.25	2.3443E-01	12.0	6.1424E-01	89.7	9.8019E-01	.1	6.3102E-02	111.8	1.2745E-02	-81.0	3.8086E-03	-175.9
.386	.456	3.90	1.9730E-01	13.3	6.2203E-01	89.9	9.8132E-01	.1	7.9424E-02	114.3	1.4524E-02	-80.7	4.6757E-03	-175.2
.403	.278	3.60	1.6456E-01	14.7	6.2448E-01	90.0	9.8217E-01	.0	1.0473E-01	116.9	1.6771E-02	-80.3	5.8667E-03	-175.4
.418	.294	3.40	1.4430E-01	15.8	5.2271E-01	90.1	7.8268E-01	-.1	1.2831E-01	118.7	1.8615E-02	-80.0	6.8939E-03	-176.0
.436	.312	3.20	1.2554E-01	17.0	6.1791E-01	90.2	7.6268E-01	-.1	1.5073E-01	120.7	2.0822E-02	-79.7	8.1626E-03	-177.0
.436	.333	3.00	1.0824E-01	18.5	6.0942E-01	90.3	7.0153E-01	-.1	1.3679E-01	122.8	2.3492E-02	-79.4	9.7426E-03	-178.3
.463	.357	2.80	9.2442E-02	20.1	5.9820E-01	90.4	6.7741E-01	-.1	2.0679E-01	125.1	2.6763E-02	-78.9	1.1739E-02	-179.9
.482	.385	2.60	7.8142E-02	22.1	5.8244E-01	90.5	2.7701E-01	-.2	2.7427E-01	127.7	3.0627E-02	-78.4	1.4322E-02	-178.3
.504	.417	2.40	6.5239E-02	24.3	5.6367E-01	90.7	2.7234E-01	-.2	3.5994E-01	130.8	3.5950E-02	-77.8	1.7791E-02	-176.2
.529	.455	2.20	5.3750E-02	27.1	5.4000E-01	91.2	9.0465E-01	-.3	6.8541E-01	134.7	4.2510E-02	-77.1	2.2747E-02	-174.1
.557	.500	2.00	4.3662E-02	30.3	5.1450E-01	92.2	7.2690E-01	-.4	1.5736E+00	140.2	5.1045E-02	-76.0	3.0601E-02	-172.1
.574	.526	1.90	3.9131E-02	32.2	5.0021E-01	93.2	9.4449E-01	-.5	2.2336E+00	144.1	5.6279E-02	-75.4	3.4657E-02	-171.4
.551	.556	1.80	3.4740E-02	34.3	4.8433E-01	94.6	7.3484E-01	-.5	3.3590E+00	149.5	6.2308E-02	-74.7	4.5411E-04	-171.4
.611	.574	1.70	3.1083E-02	36.7	4.6403E-01	97.1	9.2254E-01	-.7	5.4284E+00	157.4	6.9268E-02	-73.9	5.8663E-02	-172.9
.632	.625	1.60	2.7560E-02	39.4	4.3073E-01	101.7	9.1143E-01	-.8	9.2654E+00	170.6	7.7461E-02	-72.9	7.8952E-02	-178.3
.671	.714	1.40	2.4384E-02	42.6	3.5193E-01	104.2	9.0854E-01	-.9	1.4767E+01	-167.0	8.7525E-02	-71.8	9.8831E-02	-169.0
.711	.769	1.30	2.1549E-02	46.2	2.2035E-01	110.1	9.0031E-01	-1.1	1.6948E+01	-136.8	9.9722E-02	-70.5	9.0367E-02	-151.8
.744	.833	1.20	1.6838E-02	50.2	1.5255E-01	100.4	9.0114E-01	-1.5	1.2379E+01	-109.3	1.1464E-01	-68.0	5.6105E-02	-141.0
.782	.909	1.10	1.4912E-02	54.5	1.4424E-01	91.2	5.0267E-01	-1.7	4.4924E+00	-91.0	1.3301E-01	-66.8	3.3962E-02	-162.8
.826	1.000	1.00	1.3220E-02	59.3	1.1241E-01	56.6	3.3699E+00	-79.3	1.5572E-01	-64.2	2.5520E-02	-151.8
.876	1.111	.90	1.0171E-02	64.6	8.2239E-02	53.7	2.4731E+00	-71.7	1.8361E-01	-60.8	2.3689E-02	-162.5
.917	1.250	.80	8.4337E-03	70.2	5.3317E-02	61.6	2.6473E+00	-66.8	2.1681E-01	-56.2	2.4697E-02	-172.5
.114	1.429	.70	6.1345E-03	76.5	2.7159E-02	60.3	1.9058E+00	-63.1	2.5685E-01	-49.4	2.6197E-02	179.6
.243	1.667	.60	3.3273E-03	84.2	5.9233E-02	74.9	4.7017E-01	-59.4	2.9447E-01	-38.5	2.7596E-02	173.7
.701	2.500	.50	1.1646E-03	87.4	3.9440E-02	-36.9	5.0937E-01	-56.8	7.9752E-01	-21.1	2.8789E-02	167.7
.701	3.333	.30	1.1095E-04	45.1	2.9264E-03	-110.5	1.4707E-02	83.1	2.5629E-04	-116.3	4.5018E-05	28.0	1.3871E-02	150.1
2.200	5.000	.20	1.3596E-05	-17.2	2.7121E-05	133.4	3.6296E-04	120.3	2.5629E-04	-116.3	4.2608E-04	-32.9
3.451	10.000	.10	6.1630E-07	-129.6	1.4700E-05	43.5	1.4455E-05	70.3	4.9556E-05	-113.6	1.1685E-05	-111.2

TABLE 26 - DE-1078, RESPONSE AMPLITUDE OPERATORS, 120 DEGREES, 20 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DE 1078 (DRAFT=15.5FT)   ***

MEADING = 120. DEG   SHIP SPEED = 20.00 KNOTS   WAVE SLOPE (360*R/LAMBDA), K*R. = 2.25 DEG
(HEAD SEAS=1H0)   FROUGE NUMBER = .2923   WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / P)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.401	.238	4.20	1.7113E-01	12.0	5.2231E-01	87.5	1.0040E+00	-.0	7.8325E-02	118.1	1.3826E-02	-71.2	1.0661E-03	-162.8
.419	.256	3.90	1.4269E-01	13.2	5.2203E-01	89.6	1.0087E+00	-.1	1.0343E-01	120.8	1.5534E-02	-71.0	2.2927E-03	-164.9
.439	.278	3.60	1.1753E-01	14.7	5.1771E-01	89.8	1.0137E+00	-.1	1.4251E-01	123.6	1.7702E-02	-70.8	3.1650E-03	-167.8
.454	.294	3.40	1.0221E-01	15.8	5.1236E-01	89.9	1.0172E+00	-.1	1.8166E-01	125.6	1.9491E-02	-70.6	3.9554E-03	-170.0
.470	.312	3.25	8.8124E-02	17.1	5.0490E-01	90.0	1.0206E+00	-.1	2.3841E-01	127.7	2.1643E-02	-70.4	4.9807E-03	-172.5
.498	.333	3.00	7.5260E-02	19.5	4.9532E-01	90.2	1.0241E+00	-.1	3.2447E-01	130.1	2.4263E-02	-70.2	6.3366E-03	-175.0
.508	.357	2.80	6.3593E-02	20.2	4.8371E-01	90.4	1.0273E+00	-.1	4.6301E-01	132.9	2.7496E-02	-69.9	8.1075E-03	-177.7
.531	.385	2.60	5.3098E-02	22.1	4.7037E-01	90.9	1.0302E+00	-.2	7.0461E-01	136.5	3.1540E-02	-69.5	1.0649E-02	179.7
.557	.417	2.44	4.3749E-02	24.4	4.5590E-01	91.7	1.0323E+00	-.2	1.1756E+00	141.4	3.6675E-02	-68.9	1.5017E-02	177.4
.587	.455	2.20	3.5517E-02	27.2	4.4052E-01	93.6	1.0333E+00	-.3	2.2513E+00	149.5	4.3288E-02	-68.1	2.2491E-02	176.4
.621	.500	2.00	2.8370E-02	30.6	4.1522E-01	98.2	1.0321E+00	-.3	5.2314E+00	165.5	5.1914E-02	-67.0	3.8286E-02	179.6
.641	.526	1.90	2.5166E-02	32.7	3.8227E-01	103.1	1.0406E+00	-.4	7.9107E+00	-178.7	5.7031E-02	-66.3	4.0917E-02	-170.0
.662	.556	1.80	2.2234E-02	35.2	3.0611E-01	108.1	1.0531E+00	-.3	1.0414E+01	-156.2	6.3003E-02	-65.5	5.4434E-02	-157.1
.686	.508	1.70	1.9572E-02	37.8	2.1419E-01	107.9	1.0685E+00	-.3	1.0080E+01	-130.5	7.0077E-02	-64.5	4.0100E-02	-142.2
.712	.625	1.60	1.7171E-02	40.8	1.6810E-01	101.4	1.0879E+00	-.2	7.3759E+00	-108.8	7.8532E-02	-63.3	3.0650E-02	-133.7
.740	.667	1.50	1.5018E-02	44.2	1.5851E-01	95.0	1.1130E+00	-.0	4.9200E+00	-93.4	8.8721E-02	-61.8	2.0403E-02	-133.5
.772	.714	1.40	1.3100E-02	47.9	1.5719E-01	91.1	1.1457E+00	.2	3.3509E+00	-82.6	1.0110E-01	-59.9	1.5320E-02	-139.0
.809	.769	1.30	1.1402E-02	52.0	1.5292E-01	88.6	1.1893E+00	.6	2.4076E+00	-74.9	1.1622E-01	-57.5	1.2018E-02	-147.0
.850	.833	1.20	9.9034E-03	56.7	1.4313E-01	86.7	1.2479E+00	1.4	1.8283E+00	-69.1	1.3472E-01	-54.5	1.3254E-02	-155.5
.898	.909	1.10	8.5765E-03	61.8	1.2770E-01	85.0	1.3263E+00	2.7	1.4568E+00	-64.8	1.5713E-01	-50.7	1.4073E-02	-163.7
.954	1.000	1.00	7.3211E-03	68.3	1.0897E-01	84.8	1.4669E+00	5.4	1.1267E+00	-60.9	1.8601E-01	-45.0	1.6443E-02	-165.7
1.020	1.111	.90	6.1386E-03	75.6	8.8741E-02	84.5	1.6852E+00	10.9	8.7635E-01	-57.0	2.1884E-01	-36.8	1.7918E-02	-174.3
1.100	1.250	.80	4.9080E-03	83.3	6.7100E-02	82.9	1.9322E+00	21.7	6.9883E-01	-53.3	2.4771E-01	-24.7	2.0408E-02	-170.0
1.199	1.429	.70	3.5355E-03	90.2	4.3956E-02	79.9	1.8927E+00	41.3	5.7370E-01	-49.8	2.2699E-01	-7.7	1.9160E-02	176.8
1.327	1.667	.60	2.1527E-03	94.5	2.1658E-02	75.8	1.0499E+00	73.1	3.7279E-01	-47.8	1.4185E-01	13.0	1.5343E-02	167.0
1.498	2.000	.50	1.1202E-03	93.7	6.3911E-03	66.8	1.9325E-01	104.4	1.8914E-01	-47.5	5.7517E-01	32.4	6.0728E-03	159.9
1.743	2.500	.40	3.3284E-04	84.3	2.4356E-04	18.8	8.1445E-03	87.4	4.2300E-02	-58.6	7.6572E-03	58.8	4.1744E-04	110.4
2.126	3.333	.30	7.2106E-05	26.4	9.2487E-05	-109.8	1.9333E-03	7.2	6.2716E-03	-160.9	3.4970E-04	-22.5	1.2009E-04	-44.0
2.839	5.000	.20	1.0160E-05	-122.8	7.0566E-05	112.6	1.9431E-04	-52.5	1.3157E-03	95.9	2.4133E-04	-150.4	1.2095E-04	...
4.764	10.000	.10	5.2532E-07	-136.2	7.3829E-06	30.7	6.2080E-06	48.0	1.0195E-04	67.7	2.0726E-05	-110.2	7.1305E-04	-100.7

TABLE 27 – DE-1078, RESPONSE AMPLITUDE OPERATORS, 150 DEGREES, 10 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DE 1078 (DRAFT=15.5FT)   •••

HEADING = 150. DEG   SHIP SPEED = 10.00 KNOTS   WAVE SLOPE (360*R/LAMBDA), K*R, = 2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .1462   WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.393	.238	4.20	1.8991E-01	26.1	1.7811E-01	89.6	9.4110E-01	-.1	3.1897E-02	124.6	3.4412E-02	-80.2	3.8507E-03	-177.5
.410	.256	3.90	1.6014E-01	28.5	1.7653E-01	89.8	9.3517E-01	-.1	4.2705E-02	127.2	3.9454E-02	-79.6	4.6657E-03	-178.2
.429	.278	3.60	1.3366E-01	31.3	1.7295E-01	89.9	9.2707E-01	-.2	5.9512E-02	129.8	4.5774E-02	-79.0	5.7026E-03	-179.4
.444	.294	3.40	1.1738E-01	33.5	1.6935E-01	89.9	9.2002E-01	-.2	7.6304E-02	131.6	5.0914E-02	-78.5	6.5529E-03	-179.5
.459	.312	3.20	1.0265E-01	36.0	1.6474E-01	90.1	9.1126E-01	-.4	1.0050E-01	133.5	5.6999E-02	-78.0	7.5673E-03	-178.2
.477	.333	3.00	8.9248E-02	38.8	1.5906E-01	90.6	9.0010E-01	-.5	1.3645E-01	135.5	6.4262E-02	-77.3	8.7964E-03	176.8
.496	.357	2.80	7.7175E-02	42.0	1.5218E-01	91.1	8.8620E-01	-.6	1.4442E-01	137.7	7.2997E-02	-76.5	1.0323E-02	175.1
.518	.385	2.60	6.6416E-02	45.7	1.4429E-01	92.0	8.6406E-01	-.8	2.9234E-01	140.3	8.3577E-02	-75.6	1.2298E-02	173.4
.543	.417	2.40	5.6955E-02	50.0	1.3547E-01	93.9	8.4578E-01	-1.0	4.7620E-01	143.7	9.6454E-02	-74.4	1.5036E-02	171.6
.571	.455	2.20	4.8770E-02	54.9	1.2594E-01	98.3	8.1663E-01	-1.3	8.7561E-01	148.7	1.1217E-01	-72.9	1.9298E-02	170.1
.604	.500	2.00	4.1826E-02	60.6	1.1539E-01	98.3	7.7898E-01	-1.7	2.9602E+00	158.1	1.3120E-01	-71.1	2.7317E-02	170.6
.623	.526	1.90	3.8802E-02	63.7	1.0803E-01	102.0	7.5615E-01	-1.9	3.2627E+00	166.8	1.4203E-01	-69.9	3.4515E-02	173.2
.643	.556	1.80	3.6139E-02	67.2	9.4214E-02	111.0	7.2000E-01	-2.3	5.5258E+00	-176.9	1.5523E-01	-68.7	4.3858E-02	-178.1
.666	.588	1.70	3.3749E-02	70.8	6.1491E-02	121.2	6.9481E-01	-2.7	8.2032E+00	-151.3	1.7020E-01	-67.3	4.7932E-02	-162.8
.690	.625	1.60	3.1598E-02	74.6	2.6140E-02	120.0	6.7830E-01	-3.2	7.8650E+00	-121.0	1.8701E-01	-65.6	3.4241E-02	-166.9
.718	.667	1.50	2.9642E-02	78.6	1.6428E-02	99.8	6.5581E-01	-3.8	5.1637E+00	-97.8	2.0574E-01	-63.6	1.8371E-02	-142.7
.748	.714	1.40	2.7826E-02	82.6	1.7172E-02	86.9	6.3289E-01	-4.5	3.1495E+00	-83.7	2.2634E-01	-61.2	1.1183E-02	-150.1
.783	.769	1.30	2.6067E-02	86.7	1.6970E-02	82.0	6.0907E-01	-5.2	2.0179E+00	-75.3	2.4812E-01	-58.2	8.9047E-03	-162.3
.822	.833	1.20	2.4248E-02	90.8	1.4348E-02	79.7	5.8615E-01	-6.0	1.3718E+00	-70.6	2.6966E-01	-54.5	8.4826E-03	-173.7
.867	.909	1.10	2.2206E-02	94.9	1.0134E-02	78.2	5.6029E-01	-6.4	9.7108E-01	-68.7	2.8779E-01	-49.7	8.5775E-03	176.4
.919	1.000	1.00	1.9704E-02	99.0	5.6969E-03	77.7	5.4045E-01	-6.0	6.8313E-01	-68.6	2.9417E-01	-43.4	8.5023E-03	168.1
.982	1.111	.90	1.6404E-02	103.3	2.4731E-03	78.9	4.7232E-01	-3.2	4.3484E-01	-67.8	2.9798E-01	-34.1	7.9647E-03	162.8
1.057	1.250	.80	1.2071E-02	107.2	4.0185E-04	80.2	2.6517E-01	4.7	2.6068E-01	-69.4	2.6084E-01	-20.4	6.9113E-03	157.0
1.151	1.429	.70	6.9781E-03	109.1	1.6475E-04	-107.6	2.9986E-02	20.2	1.4130E-01	-75.5	1.6247E-01	-.5	5.1811E-03	168.1
1.270	1.667	.60	2.3545E-03	104.3	1.4642E-03	-113.9	3.5453E-02	24.3	5.2434E-02	-95.5	4.2986E-02	26.4	2.3566E-03	134.2
1.430	2.000	.50	4.2274E-04	77.7	1.9347E-03	-124.8	9.3430E-03	-42.7	2.0702E-02	-145.2	7.3365E-03	90.4	4.1302E-04	90.3
1.657	2.500	.40	1.2411E-04	-20.2	5.5206E-03	-160.4	8.7503E-04	1.1	1.3166E-02	165.6	1.6789E-05	-105.5	4.5437E-04	-5.8
2.013	3.333	.30	2.2358E-05	-114.5	1.6213E-04	74.3	5.1836E-05	-142.2	1.3766E-03	35.9	1.7759E-05	-64.6	6.6844E-05	-98.7
2.668	5.000	.20	7.1068E-06	19.1	1.7558E-05	-171.8	5.7973E-06	9.0	4.1622E-04	171.3	1.7759E-05	71.2	1.4173E-05	2.5
4.4210	10.000	.10	7.6717E-07	150.3	2.1450E-06	-175.7		-51.0	2.5344E-06	46.1	1.9494E-05	129.8	9.0567E-08	29.9

TABLE 28 - DE-1078, RESPONSE AMPLITUDE OPERATORS, 150 DEGREES, 20 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DE 1078 (DRAFT=15.5FT)   •••

HEADING = 150. DEG   SHIP SPEED = 20.00 KNOTS   WAVE SLOPE (360*H/LAMBDA), K*H. = 2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .2923   WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.446	.238	4.20	1.1562E-01	26.1	1.3703E-01	89.7	9.9012E-01	-.3	5.4753E-02	133.7	3.5089E-02	-72.5	2.1710E-03	-170.7
.467	.256	3.90	9.6101E-02	28.5	1.3364E-01	89.9	9.9081E-01	-.4	7.4559E-02	136.1	4.0113E-02	-72.0	2.7833E-03	-173.3
.491	.278	3.60	7.8833E-02	31.4	1.2912E-01	90.2	9.9076E-01	-.5	1.1953E-01	138.8	4.6465E-02	-71.3	3.6155E-03	-176.1
.509	.294	3.40	6.8542E-02	33.6	1.2551E-01	90.5	9.9013E-01	-.5	1.6525E-01	140.8	5.1664E-02	-70.8	4.3567E-03	-178.1
.529	.312	3.20	5.9204E-02	36.1	1.2151E-01	91.0	9.9458E-01	-.7	2.3933E-01	143.4	5.7858E-02	-70.1	5.3354E-03	179.9
.551	.333	3.00	5.0799E-02	38.9	1.1724E-01	91.9	9.8670E-01	-.8	3.7210E-01	146.8	6.5277E-02	-69.3	6.7140E-03	178.1
.575	.357	2.80	4.3303E-02	42.2	1.1288E-01	93.4	9.8339E-01	-.9	6.3584E-01	151.8	7.4220E-02	-68.3	8.8529E-03	176.9
.603	.385	2.60	3.6693E-02	46.0	1.0814E-01	96.7	9.7844E-01	-1.0	1.2545E+00	160.6	8.5038E-02	-67.1	1.2672E-02	177.6
.635	.417	2.40	3.0953E-02	50.5	9.7840E-02	104.9	9.7670E-01	-1.1	2.8694E+00	-180.0	9.8273E-02	-65.6	1.9792E-02	-173.9
.672	.455	2.20	2.6081E-02	55.9	5.4947E-02	116.3	9.8908E-01	-1.3	4.8242E+00	-138.5	1.1519E-01	-63.6	2.2208E-02	-148.4
.715	.500	2.00	2.2007E-02	62.1	2.7061E-02	100.7	1.0499E+00	-1.3	2.9789E+00	-97.0	1.3693E-01	-61.0	1.0043E-02	-131.8
.739	.526	1.90	2.0245E-02	65.4	2.7203E-02	92.6	1.0254E+00	-1.3	2.0344E+00	-84.5	1.5094E-01	-59.4	6.6020E-03	-134.8
.766	.556	1.80	1.8648E-02	69.0	2.8133E-02	88.2	1.0457E+00	-1.2	1.4291E+00	-75.8	1.6506E-01	-57.5	5.0325E-03	-142.3
.796	.588	1.70	1.7202E-02	72.8	2.8001E-02	85.8	1.0722E+00	-1.0	1.0521E+00	-69.7	1.8204E-01	-55.2	4.4623E-03	-151.3
.829	.625	1.60	1.5883E-02	76.9	2.6545E-02	84.2	1.1066E+00	-.5	8.0529E-01	-65.4	2.0119E-01	-52.5	4.4019E-03	-159.8
.865	.667	1.50	1.4663E-02	81.1	2.3917E-02	82.9	1.1504E+00	.0	6.3986E-01	-62.4	2.2227E-01	-49.3	4.5982E-03	-167.6
.906	.714	1.40	1.3504E-02	85.5	2.0364E-02	81.5	1.2037E+00	1.8	5.2221E-01	-60.7	2.4485E-01	-45.3	4.9052E-03	-174.5
.953	.769	1.30	1.2325E-02	90.6	1.6737E-02	82.0	1.3056E+00	4.5	4.0409E-01	-58.0	2.7242E-01	-39.8	5.1029E-03	-178.8
1.006	.833	1.20	1.1061E-02	96.0	1.2980E-02	82.1	1.4401E+00	9.3	3.1449E-01	-55.7	2.9491E-01	-32.5	5.3240E-03	177.7
1.068	.909	1.10	9.5005E-03	101.4	9.2186E-03	81.2	1.5750E+00	17.7	2.4616E-01	-53.6	3.1543E-01	-22.8	5.5559E-03	174.4
1.141	1.000	1.00	7.7586E-03	106.7	5.6221E-03	78.5	1.5661E+00	31.6	1.9446E-01	-52.1	3.0311E-01	-9.8	5.7837E-03	170.5
1.228	1.111	.90	5.5878E-03	111.0	2.5322E-03	74.1	1.2443E+00	53.3	1.4211E-01	-52.0	2.3840E-01	7.1	5.5632E-03	166.2
1.334	1.250	.80	3.4761E-03	112.8	6.4231E-04	68.3	5.4547E-01	82.8	8.1669E-02	-53.7	1.3465E-01	26.5	4.4168E-03	163.0
1.467	1.429	.70	1.8331E-03	110.3	2.3340E-05	3.5	4.0747E-02	112.1	3.6311E-02	-59.0	5.1389E-02	46.1	2.9159E-03	158.4
1.639	1.667	.60	6.3387E-04	101.8	8.7723E-04	-99.0	1.8327E-03	43.3	9.1951E-03	-83.7	7.7073E-03	76.1	1.0774E-03	148.5
1.873	2.000	.50	1.1415E-04	65.9	4.7275E-04	-116.2	6.9990E-04	9.4	3.9826E-03	-152.8	1.4968E-04	-112.4	1.1364E-04	107.0
2.211	2.500	.40	4.5668E-05	-15.5	1.1430E-04	-155.2	8.4792E-04	-11.4	2.8237E-03	156.7	6.6522E-04	-64.3	1.0867E-04	-4.8
2.750	3.333	.30	6.6235E-05	-122.2	4.3259E-05	55.7	2.2092E-05	-115.7	6.1815E-04	15.9	5.5501E-04	-123.5	5.7900E-05	-128.2
3.775	5.000	.20	1.7477E-06	-44.0	1.3005E-05	171.6	2.8037E-05	-34.7	1.8831E-04	154.5	4.6003E-05	105.7	1.0195E-05	-19.2
6.636	10.000	.10	6.2914E-07	-177.7	5.4974E-07	-151.1	3.5212E-06	-8.9	5.2217E-06	105.7	1.1833E-05	168.1	2.6722E-07	-32.1

TABLE 29 - DE-1078, RESPONSE AMPLITUDE OPERATORS, 180 DEGREES, 10 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   DE 1078 (DRAFT=15.5FT)

HEADING = 180. DEG   SHIP SPEED = 10.00 KNOTS   WAVE SLOPE (360*R/LAMBDA), X*R. = 2.25 DEG
(HEAD SEAS=180)   FROUDE NUMBER = .1462   WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80

RESPONSE AMPLITUDE OPERATORS

WE RPS	L/LAM	LAM/L	(SURGE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH / R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW / R)**2 AMPL. RATIO SQUARED	PHASE DEG
.401	.238	4.20	1.7724E-01	31.5	0.	0.0	9.2013E-01	-.1	0.	0.0	4.4668E-02	-79.6	0.	0.0
.417	.250	3.96	1.4980E-01	34.3	0.	0.0	9.1672E-01	-.2	0.	0.0	5.1198E-02	-78.9	0.	0.0
.439	.276	3.63	1.2536E-01	37.7	0.	0.0	8.9830E-01	-.3	0.	0.0	5.9336E-02	-78.2	0.	0.0
.454	.294	3.40	1.1071E-01	40.3	0.	0.0	8.8781E-01	-.4	0.	0.0	6.5912E-02	-77.6	0.	0.0
.470	.312	3.20	9.7372E-02	43.7	0.	0.0	8.7501E-01	-.5	0.	0.0	7.3647E-02	-77.0	0.	0.0
.488	.333	3.00	8.5330E-02	46.5	0.	0.0	8.5942E-01	-.7	0.	0.0	8.2798E-02	-76.2	0.	0.0
.508	.357	2.80	7.4574E-02	50.1	0.	0.0	8.3997E-01	-.9	0.	0.0	9.3679E-02	-75.2	0.	0.0
.531	.385	2.60	6.5087E-02	52.5	0.	0.0	8.1599E-01	-1.1	0.	0.0	1.0666E-01	-74.1	0.	0.0
.557	.417	2.40	5.6847E-02	59.4	0.	0.0	7.8613E-01	-1.4	0.	0.0	1.2214E-01	-72.7	0.	0.0
.587	.455	2.20	4.9813E-02	64.8	0.	0.0	7.4842E-01	-1.8	0.	0.0	1.4045E-01	-71.0	0.	0.0
.621	.500	2.00	4.3915E-02	70.8	0.	0.0	7.0210E-01	-2.4	0.	0.0	1.6164E-01	-68.8	0.	0.0
.641	.526	1.90	4.1433E-02	74.1	0.	0.0	6.8098E-01	-2.8	0.	0.0	1.7473E-01	-67.6	0.	0.0
.662	.556	1.80	3.9188E-02	77.6	0.	0.0	6.5913E-01	-3.3	0.	0.0	1.8937E-01	-66.1	0.	0.0
.686	.588	1.70	3.7129E-02	81.2	0.	0.0	6.3562E-01	-3.9	0.	0.0	2.0535E-01	-64.4	0.	0.0
.712	.625	1.60	3.5203E-02	84.8	0.	0.0	6.1057E-01	-4.6	0.	0.0	2.2254E-01	-62.4	0.	0.0
.740	.667	1.50	3.3337E-02	88.4	0.	0.0	5.8429E-01	-5.4	0.	0.0	2.4056E-01	-60.0	0.	0.0
.773	.714	1.40	3.1435E-02	92.1	0.	0.0	5.5713E-01	-6.3	0.	0.0	2.5855E-01	-57.1	0.	0.0
.807	.769	1.30	2.9365E-02	95.7	0.	0.0	5.2928E-01	-7.3	0.	0.0	2.7484E-01	-53.5	0.	0.0
.850	.833	1.20	2.6954E-02	99.2	0.	0.0	4.9992E-01	-8.1	0.	0.0	2.8639E-01	-49.1	0.	0.0
.898	.909	1.10	2.3983E-02	102.6	0.	0.0	4.6321E-01	-8.3	0.	0.0	2.8791E-01	-43.5	0.	0.0
.954	1.000	1.00	2.0144E-02	106.1	0.	0.0	4.3211E-01	-7.1	0.	0.0	2.7921E-01	-35.4	0.	0.0
1.020	1.111	.90	1.5265E-02	107.2	0.	0.0	3.7556E-01	-2.5	0.	0.0	2.4454E-01	-23.9	0.	0.0
1.100	1.250	.80	9.5548E-03	111.1	0.	0.0	2.4361E-01	7.5	0.	0.0	1.6712E-01	-7.3	0.	0.0
1.200	1.429	.70	4.2214E-03	108.6	0.	0.0	5.846x-02	13.4	0.	0.0	6.1837E-02	15.6	0.	0.0
1.327	1.667	.60	9.8550E-04	72.2	0.	0.0	3.2043E-02	-50.7	0.	0.0	3.1657E-02	52.9	0.	0.0
1.499	2.000	.50	1.6177E-04	21.7	0.	0.0	3.8732E-02	-32.2	0.	0.0	5.3778E-03	-124.1	0.	0.0
1.743	2.500	.40	1.4416E-04	-53.3	0.	0.0	1.1594E-03	60.6	0.	0.0	3.8436E-03	-83.6	0.	0.0
2.127	3.333	.30	3.052HE-05	165.1	0.	0.0	2.5906E-04	-150.6	0.	0.0	3.5429E-04	134.3	0.	0.0
2.839	5.000	.20	5.5076E-06	-97.5	0.	0.0	1.1571E-05	-24.0	0.	0.0	6.3609E-05	-94.5	0.	0.0
4.765	10.000	.10	1.2941E-07	4.9	0.	0.0	5.6809E-06	175.3	0.	0.0	1.1134E-05	-.8	0.	0.0

TABLE 30 - DE-1078, RESPONSE AMPLITUDE OPERATORS, 180 DEGREES, 20 KNOTS

SHIP MOTIONS IN REGULAR WAVES ***   (DE 1078 (DRAFT=15.5FT))   ***

HEADING = 180. DEG   SHIP SPEED = 20.00 KNOTS   WAVE SLOPE (360*R/LAMBDA), K*R. = 2.25 DEG
(HEAD SEAS=180.)   FROUDE NUMBER = .2423   WAVE STEEPNESS (2*R/LAMBDA) = 1 / 80.

RESPONSE AMPLITUDE OPERATORS

WT RPS	L/LAM	LAM/L	(SURGE/R)**2 AMPL. RATIO SQUARED	PHASE DEG	(SWAY/R)**2 AMPL. RATIO SQUARED	PHASE DEG	(HEAVE/R)**2 AMPL. RATIO SQUARED	PHASE DEG	(ROLL/R)**2 AMPL. RATIO SQUARED	PHASE DEG	(PITCH/R)**2 AMPL. RATIO SQUARED	PHASE DEG	(YAW/R)**2 AMPL. RATIO SQUARED	PHASE DEG
.402	.238	4.20	1.0175E-01	31.5	0.	0.0	9.7917E-01	-.5	0.	0.0	4.5360E-02	-72.2	0.	0.0
.408	.256	3.90	1.4676E-02	34.4	0.	0.0	9.7778E-01	-.6	0.	0.0	5.1968E-02	-71.5	0.	0.0
.413	.278	3.60	6.9569E-02	37.8	0.	0.0	9.7523E-01	-.7	0.	0.0	6.0270E-02	-70.7	0.	0.0
.419	.294	3.40	5.0743E-02	40.4	0.	0.0	9.7266E-01	-.8	0.	0.0	6.7019E-02	-69.9	0.	0.0
.425	.312	3.20	5.2767E-02	43.4	0.	0.0	9.6918E-01	-.9	0.	0.0	7.4986E-02	-69.1	0.	0.0
.413	.333	3.00	4.5601E-02	46.4	0.	0.0	9.6473E-01	-1.1	0.	0.0	8.4425E-02	-68.1	0.	0.0
.500	.357	2.80	3.4261E-02	50.6	0.	0.0	9.5832E-01	-1.2	0.	0.0	9.5626E-02	-66.8	0.	0.0
.505	.385	2.60	3.3729E-02	55.0	0.	0.0	9.5245E-01	-1.4	0.	0.0	1.0900E-01	-65.3	0.	0.0
.504	.417	2.40	2.9018E-02	60.2	0.	0.0	9.6022E-01	-1.5	0.	0.0	1.2589E-01	-63.4	0.	0.0
.103	.455	2.20	2.5041E-02	66.1	0.	0.0	9.7429E-01	-1.7	0.	0.0	1.4699E-01	-61.0	0.	0.0
.177	.500	2.00	2.1719E-02	72.5	0.	0.0	9.9916E-01	-1.7	0.	0.0	1.7342E-01	-57.7	0.	0.0
.172	.526	1.90	2.0270E-02	76.0	0.	0.0	1.0178E+00	-1.6	0.	0.0	1.8498E-01	-55.7	0.	0.0
.504	.556	1.80	1.8939E-02	79.7	0.	0.0	1.0420E+00	-1.3	0.	0.0	2.0621E-01	-53.4	0.	0.0
.630	.588	1.70	1.7699E-02	82.4	0.	0.0	1.0728E+00	-.6	0.	0.0	2.2504E-01	-50.6	0.	0.0
.711	.625	1.60	1.6526E-02	87.3	0.	0.0	1.1109E+00	-.1	0.	0.0	2.4513E-01	-47.3	0.	0.0
.735	.667	1.50	1.5357E-02	91.4	0.	0.0	1.1572E+00	1.7	0.	0.0	2.6594E-01	-43.3	0.	0.0
.005	.714	1.40	1.4131E-02	96.0	0.	0.0	1.2462E+00	4.4	0.	0.0	2.9068E-01	-37.8	0.	0.0
1.063	.769	1.30	1.2708E-02	100.7	0.	0.0	1.3563E+00	9.2	0.	0.0	3.1260E-01	-30.8	0.	0.0
1.063	.833	1.20	1.1143E-02	105.5	0.	0.0	1.4574E+00	17.2	0.	0.0	3.2373E-01	-21.5	0.	0.0
1.130	.909	1.10	9.1447E-03	110.1	0.	0.0	1.4519E+00	30.0	0.	0.0	3.0864E-01	-9.4	0.	0.0
1.207	1.000	1.00	6.7650E-03	113.4	0.	0.0	1.1717E+00	49.3	0.	0.0	2.4898E-01	6.1	0.	0.0
1.364	1.111	.90	4.3647E-03	115.4	0.	0.0	5.8677E-01	76.5	0.	0.0	1.5048E-01	24.9	0.	0.0
1.420	1.250	.80	2.4744E-03	114.6	0.	0.0	1.1746E-01	105.4	0.	0.0	6.3636E-02	44.0	0.	0.0
1.595	1.429	.70	1.0000E-03	107.3	0.	0.0	1.4240E-03	85.7	0.	0.0	1.3974E-02	69.8	0.	0.0
1.753	1.667	.6.	2.3239E-04	87.3	0.	0.0	9.6375E-03	5.6	0.	0.0	4.2651E-04	146.2	0.	0.0
2.010	2.000	.50	5.7750E-05	14.6	0.	0.0	3.5235E-03	6.7	0.	0.0	1.4069E-03	-75.5	0.	0.0
2.502	2.500	.40	1.1259E-05	-61.3	0.	0.0	2.3228E-04	-55.9	0.	0.0	2.0253E-04	-77.7	0.	0.0
3.909	3.333	.30	3.9998E-06	173.6	0.	0.0	1.0009E-04	165.9	0.	0.0	4.8952E-06	-89.8	0.	0.0
4.117	5.000	.20	2.3664E-06	-111.7	0.	0.0	1.6435E-05	10.8	0.	0.0	5.1775E-05	-116.5	0.	0.0
8.2110	10.000	.10	3.3550E-07	60.2	0.	0.0	4.6018E-06	-129.3	0.	0.0	1.2161E-05	56.0	0.	0.0

REFERENCES

1. Meyers, W.G., D.J. Sheridan and N. Salvesen, "Manual NSRDC Ship Motion and Sea Load Computer Program," NSRDC Report 3376 (in preparation).

2. Bales, S.L., W.G. Meyers and G.A. Rossignol, "Helicopter Landing Platform Response Predictions of DLG-26 and DE-1040 Class Destroyers," NSRDC Report 3868, July 1973.

3. Hadler, J.B. and T.H. Sarchin, "Seakeeping Criteria and Specifications," SNAME Seakeeping Symposium, Webb Institute of Naval Architecture, October 1973.

4. Baitis, A.E., S.I. Bales and W.G. Meyers, "Design Acceleration and Ship Motions for LNG Cargo Tanks," Tenth Symposium on Naval Hydrodynamics, June 19⁻

5. Cummins, W.E., "Prediction of Seakeeping Performance," 17th American Towing Tank Conference State of the Art Report - Seakeeping, June 1974.

6. Hoffman, D., "Analysis of Measured and Calculated Spectra," International Symposium on the Dynamics of Marine Vehicles and Structures in Waves, University College, London, April 1974.

7. Hoffman, D., "Environmental Condition Representation," 17th American Towing Tank Conference State of the Art Report - Seakeeping, June 1974.